



I/O-System — **SPEEDWAY**

◀◀ Section 4

I/O-System — 750 and 753 Series

- Highly versatile
- More than 500 modules available
- Functional Safety
- Ex i

◀ Section 5











I/O-System — 750 XTR Series

For demanding applications where the following are critical:

- Extreme temperature stability
- Immunity to interference and dielectric strength
- Vibration and shock resistance

I/O-System — **SPEEDWAY**

- Uncompromising protection, even in the harshest environments outside the control cabinet
- Degree of protection: IP67
- Fully encapsulated

| | | | | Page: |
|---|---|--|-----------------------------------|-------------------------|
| General Product Information | | | | 430 |
| Item Number Keys | | | | 431 |
| Interfaces and Configurations | | | | 432 |
| Application and Installation Instructions | | | | 434 |
| Standards and Rated Conditions | | | | 435 |
| | Description | Item No. | /IF; Interference-free | |
|  | Fieldbus Couplers | FC PROFINET IO, 8 DI, 24 VDC | 767-1201 | 436 |
| | | FC PROFIBUS DP, 8 DI, 24 VDC | 767-1101 | 438 |
| | | FC ETHERNET, 8 DI, 24 VDC | 767-1301 | 440 |
| | | FC sercos 8 DI, 24 VDC, HS | 767-1311 | 442 |
| | | FC DeviceNet, 8 DI, 24 VDC | 767-1401 | 444 |
| | | FC CANopen, 8 DI, 24 VDC | 767-1501 | 446 |
|  | Digital Input Modules (DI) | 8 DI, 24 VDC (8 x M8) | 767-3801 | 448 |
| | | 8 DI, 24 VDC (4 x M12) | 767-3802 | 450 |
| | | 8 DI, 24 VDC LS SWITCH (8 x M8) | 767-3803 | 452 |
| | | 8 DI, 24 VDC LS SWITCH (4 x M12) | 767-3804 | 454 |
| | | 8 DI, 24 VDC (8 x M12) | 767-3805 | 456 |
| | | 8 DI, 24 VDC, HS (4 x M12) | 767-3806 | 458 |
|  | Digital Output Modules (DO) | 8 DO, 24 VDC, 0.5 A (8 x M8) | 767-4801 | 767-4801/000-800 460 |
| | | 8 DO, 24 VDC, 0.5 A (4 x M12) | 767-4802 | 767-4802/000-800 462 |
| | | 8 DO, 24 VDC, 2.0 A (8 x M8) | 767-4803 | 767-4803/000-800 464 |
| | | 8 DO, 24 VDC, 2.0 A (4 x M12) | 767-4804 | 767-4804/000-800 466 |
| | | 8 DO, 24 VDC, 0.5 A LS SWITCH (8 x M8) | 767-4805 | 468 |
| | | 8 DO, 24 VDC, 0.5 A (4 x M12) | 767-4806 | 470 |
| | | 8 DO, 24 VDC, 0.5 A (8 x M12) | 767-4807 | 767-4807/000-800 472 |
| | | 8 DO, 24 VDC, 0.1 A HS (4 x M12) | 767-4808 | 474 |
|  | Digital Input/Output Modules (DIO) | 8 DIO, 24 VDC, 0.5 A (8 x M8) | 767-5801 | 767-5801/000-800 476 |
| | | 8 DIO, 24 VDC, 0.5 A (4 x M12) | 767-5802 | 767-5802/000-800 478 |
| | | 8 DIO, 24 VDC, 0.5 A (8 x M12) | 767-5803 | 767-5803/000-800 480 |
| | | 4 DIO, 24 VDC, 0.2 A HS (4 x M12) | 767-5401 | 482 |
|  | Analog Input Modules (AI) | 4 AI U/I (4 x M12) | 767-6401 | 484 |
| | | 4 AI RTD (4 x M12) | 767-6402 | 486 |
| | | 4 AI TC (4 x M12) | 767-6403 | 488 |
|  | Analog Output Modules (AO) | 4 AO U/I (4 x M12) | 767-7401 | 490 |
|  | Function and Technology Modules | TTL Incremental Encoder/SSI Encoder (4 x M12) | 767-5201 | 492 |
| | | HTL Incremental Encoder/Counter (4 x M12) | 767-5202 | 494 |
|  | Communication Modules | Serial Interface RS-232, RS-422/-485 (4 x M12) | 767-5203 | 496 |
| | | MOVILINK® Interface (RS-232, RS-485) (4 x M12) | 767-5204 | 498 |
|  | Supply Modules | Power Divider (1 x M23 + 6 x M12) | 767-9101 | 500 |
| Accessories | | | | |
|  | S-BUS, Power Supply, PROFIBUS, ETHERNET, sercos, CANopen and DeviceNet Cables | | | 502 |
| | Configurable Connectors and General Accessories | | | 514 |
| | Marking and Mounting Accessories | | | 520 |

For Cabinet-Free Data Acquisition

Where previously discrete wiring was once required, fieldbuses now provide communication between the control and field levels. Depending on the application, cabinet-free automation systems help minimize costs for planning, start-up and maintenance.

In addition to requiring a high degree of protection, a robust design and standardized connection technology, there is an increasing demand for advanced IP67 features that were once reserved only for IP20 systems, including:

- Real-time capability for isochronous data acquisition/output
- Parameterizable
- Diagnostic capable
- Upgradable

From the cabinet directly to the field level without sacrificing functionality – SPEEDWAY for perfectly tailoring machines to meet specific, decentralized needs. Configuration is both easy and flexible, with changes being made safely and quickly (plug & play).

Uncompromising Protection, Even in the Harshest Environments

Every module utilizes IP67-grade protection and robust construction. These fully encapsulated modules safeguard system operation, even when subjected to temperature extremes and prolonged periods of vibration. When combined, these robust design elements ensure long-term electronic circuit protection. Additionally, moisture cannot penetrate the units to cause damage (e.g., hairline cracks).

Electromagnetic shielding consisting of a metallized housing and shield plating guarantees optimal electromagnetic compatibility within the housing. Potential on-machine interferences are directly deflected via the modules' brackets or system's mounting rail. Even in sub-zero temperatures, the WAGO SPEEDWAY I/O-System performs reliably.

Modular Design

WAGO SPEEDWAY 767 is a fieldbus-independent modular IP67 I/O system. It is linked via a fieldbus coupler with a higher-level controller. The fieldbus coupler already has digital inputs. An integrated system bus interface connects to other I/O modules. Fieldbus couplers and I/O modules can be extensively parameterized, allowing direct field-side acquisition and transmission of signals depending on the application needs.

Up to:

- 64 I/O modules per station
- 8 channels per module
- 520 channels per station
- 50 m between two modules
- 500 m total extension per station

Ergonomic Design

Standardized M8, M12 and M23 connections (metal design) ensure easy and safe wiring. The fieldbus, system bus, power supply and sensors/actuators are connected via several coded connectors. This streamlined approach prevents wiring errors.

To accommodate custom marking, the modules have marking strips and a WMB plate. Both the LEDs and marking field are uniquely assigned to the connection.

Flexible Assembly

The modules can be directly mounted on machines. Extensive engineering ensures compliance with standardized specifications from CNOMO guidelines regarding the spacing of assembly drill holes that are often used in passive distributor or sensor/actuator boxes. Adapters for both rails and machine-mount brackets are also available.

Exceptional Degrees of Freedom


Featuring **update capability**, the SPEEDWAY I/O-System makes it easy to update fieldbus couplers and I/O module firmware to incorporate new functions.


Integrated **system parameter handling** stores and loads parameter settings and checks that the replacement module is correct when installed.

With **option handling**, variable I/O station configurations, which can occur when tools are changed in a machining center, can be implemented without engineering via PROFIBUS.

- Fully encapsulated for harsh environmental conditions
- Fieldbus-independent – compatible with all standard fieldbus protocols & ETHERNET standards
- Real-time capability up to isochronous mode for selected ETHERNET-based fieldbuses
- Exclusive use of standard pluggable connectors
- Flexible mounting options

Explanation of the components for the item number key

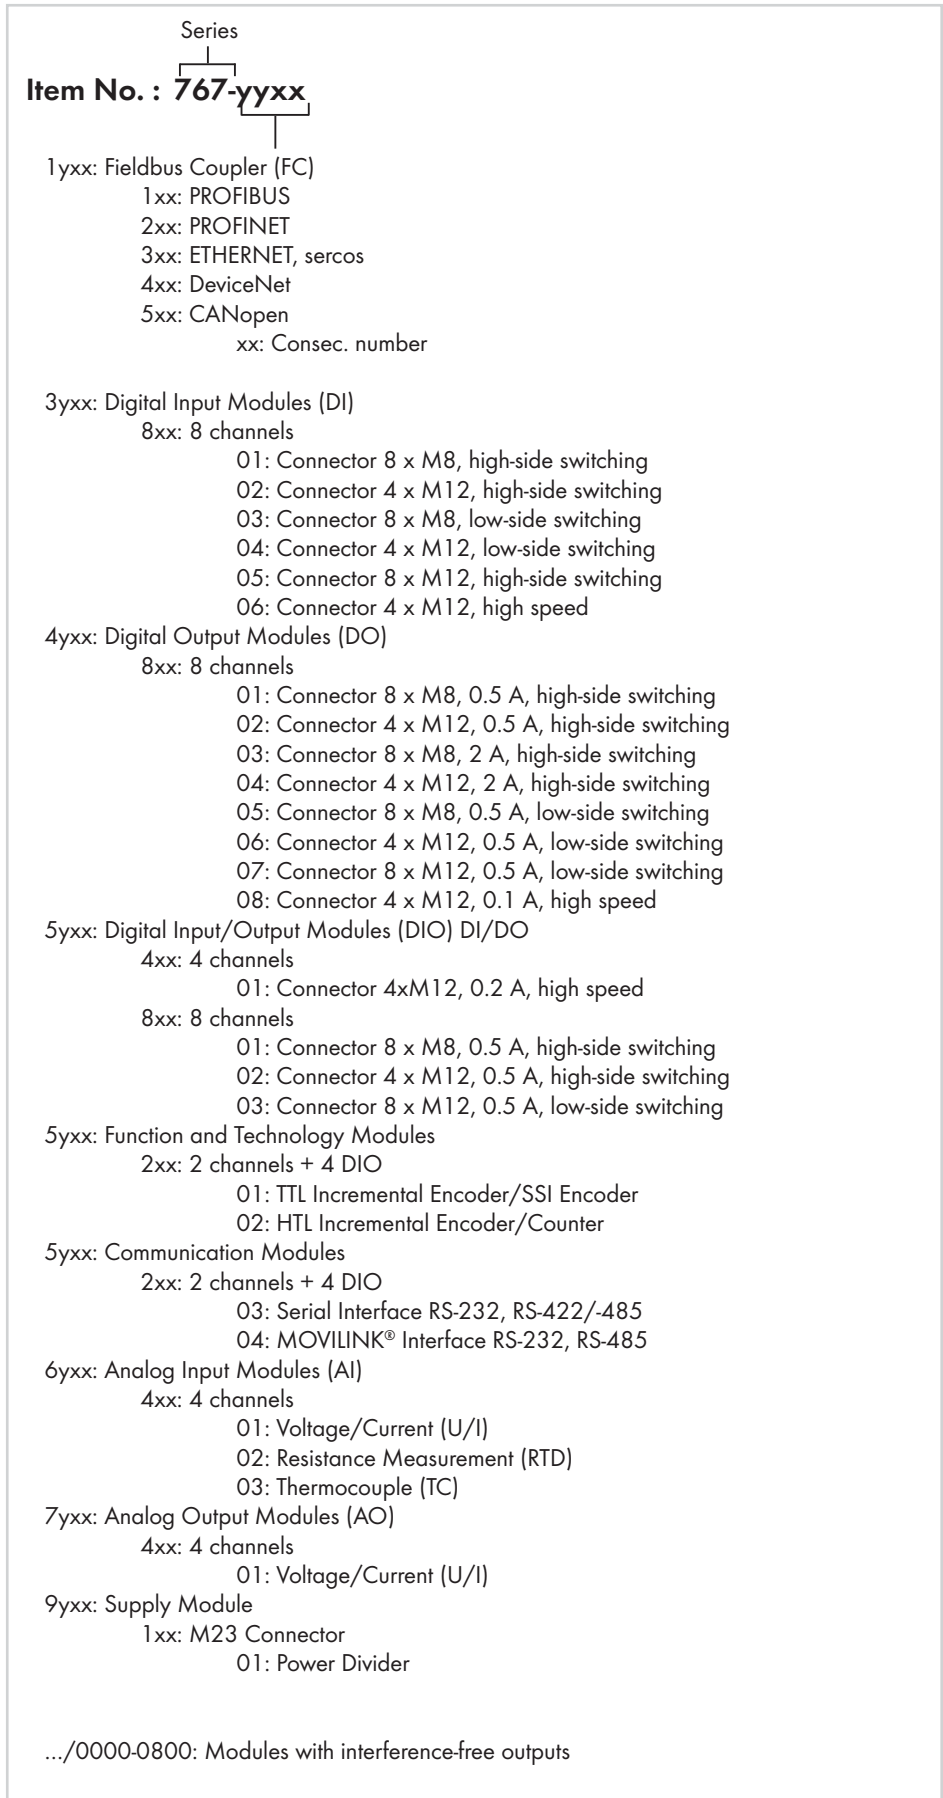


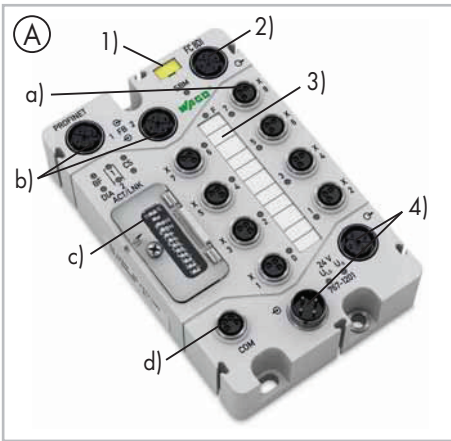

- (1) Module marking WMB
- (2) System bus connection M12
- (3) Sensor/actuator marking
- (4) Supply connections M12


Housing design fieldbus coupler (A)

- Sensor/actuator connections M8 (a)
- Fieldbus connections M12 (b)
- Control panel (c)
- Service connection M8 (d)
- W x H x L (mm) 75 x 35.7 x 117

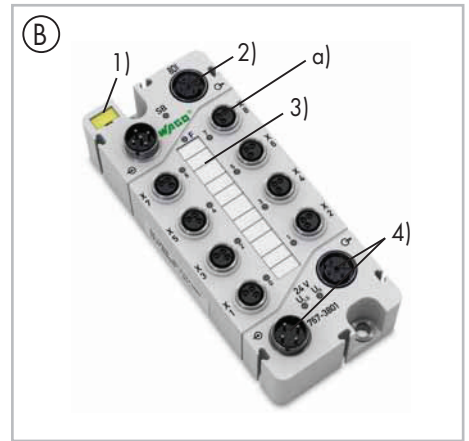


Housing design I/O module 8 x M8 (B)

- Sensor/actuator connections M8 (a)
- W x H x L (mm) 50 x 35.7 x 117

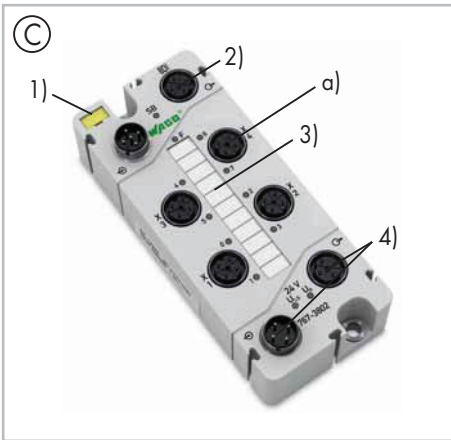

Housing design I/O module 4 x M12 (C)

- Sensor/actuator connections M12 (a)
- W x H x L (mm) 50 x 35.7 x 117

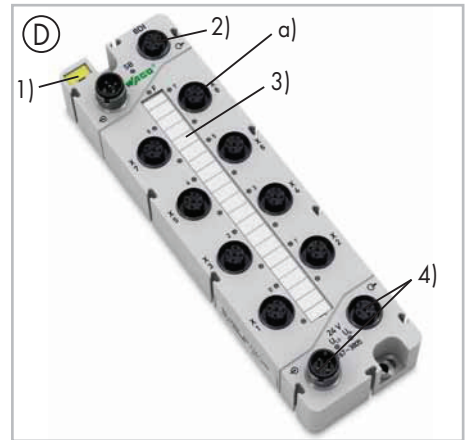


Housing design I/O module 8 x M12 (D)

- Sensor/actuator connections M12 (a)
- W x H x L (mm) 50 x 35.7 x 170




Power divider housing design (E)

- Supply outputs M12 (a)
- Supply output marking (b)
- Supply input M23 (c)
- W x H x L (mm) 50 x 35.7 x 117

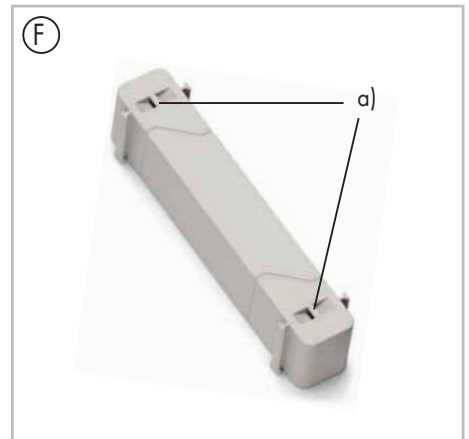

Spacer module (F)

- Cable tie mounts (a)
- W x H x L (mm) 20 x 25 x 117

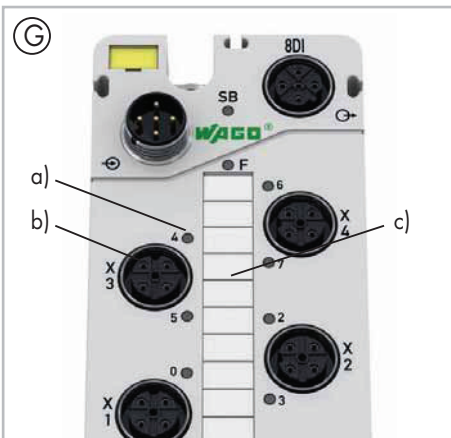

Signaling (G)


- Per channel 1–2 LEDs (a)
- Unique assignment to the connector (b)
- Unique assignment to the marking (c)




Degree of protection (H)

- All modules are fully encapsulated
- Degree of protection: IP67
- Printing on back of unit details pin assignment


Fieldbus coupler

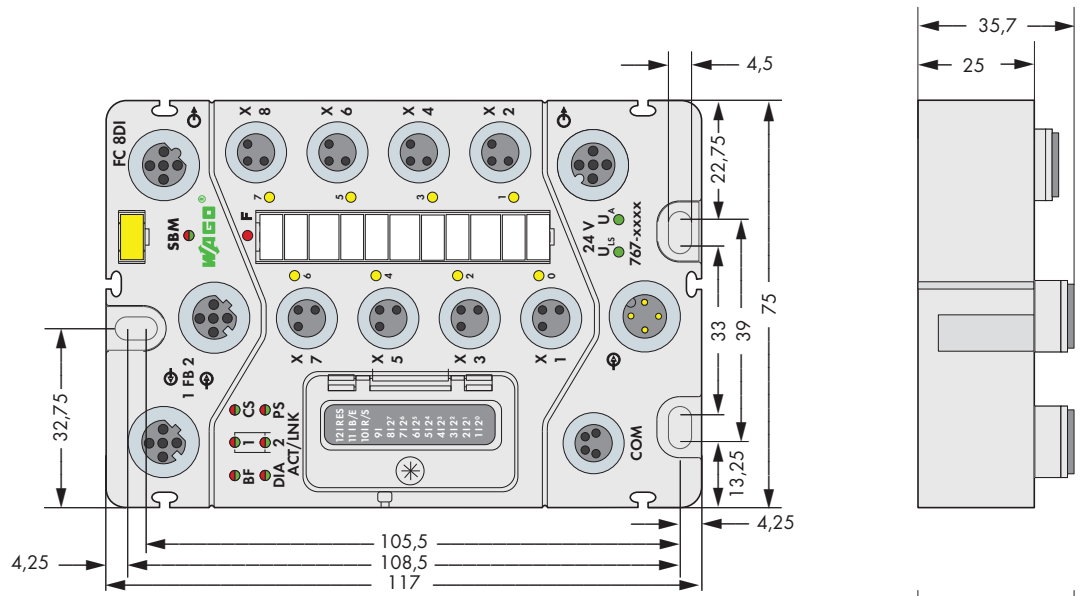


I/O module

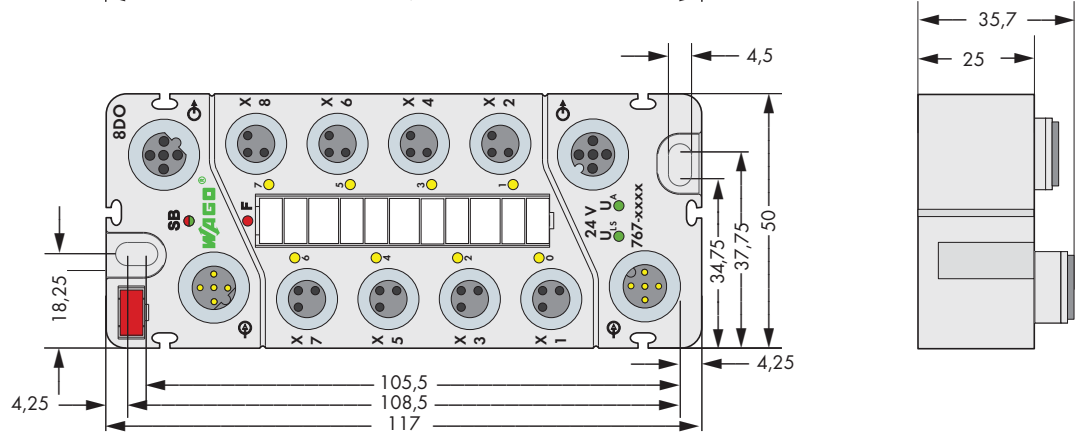

I/O module

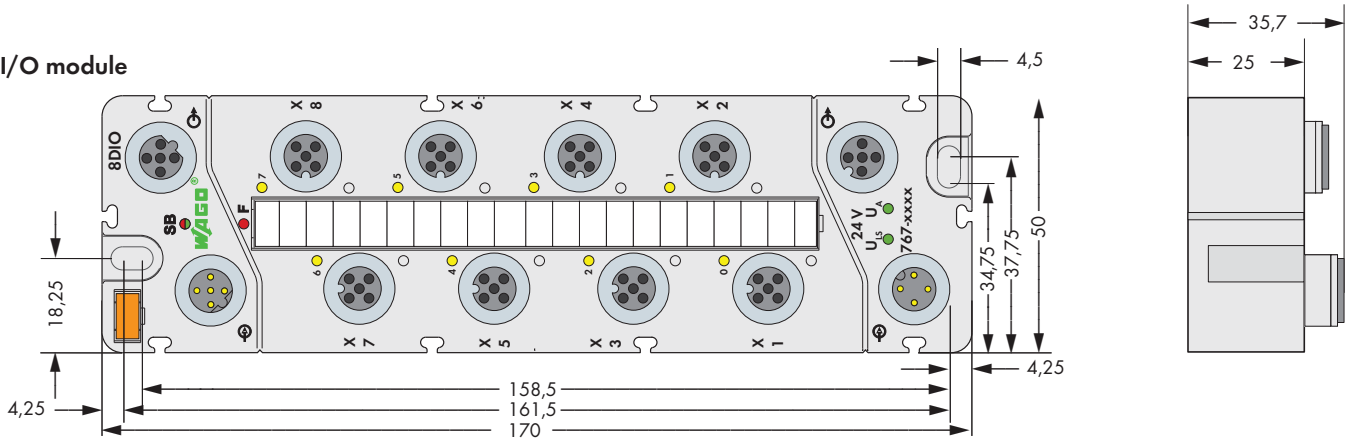

Power divider

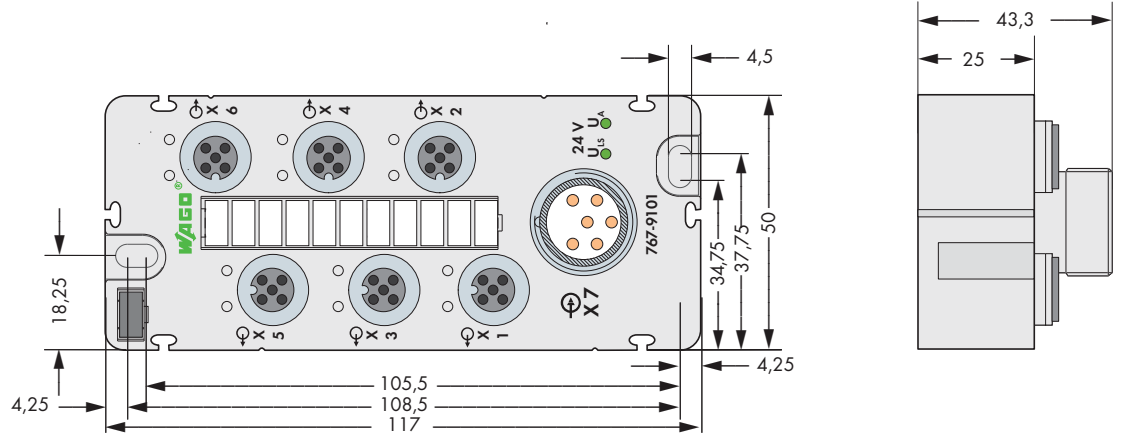


Power supply

The modular structure permits both individual supply of I/O modules and aggregation to supply groups (e.g., for implementing emergency stop groups). Thus, each supply group and each individual supply can be operated using different power supplies at the same potential. Two supply lines are routed within the supply lines (gray). U_{LS} for logic and sensor supply is always electrically isolated from U_A for the actuator supply.

You can connect additional I/O modules until the highest permissible current load of 4 A for one supply line (U_{LS} and/or U_A) is reached. To connect other SPEEDWAY modules, you have to reconnect the power supply. An exception are the 2 A output modules which cannot route the power supply due to an increased power demand.

By using a power divider, it is possible to distribute the U_{LS} and U_A power supplies over six M12 connectors. The combination of point-to-point power distribution and linear power distribution/routing offers the greatest flexibility to optimize the supply lines for the respective application and to supply power over large distances.

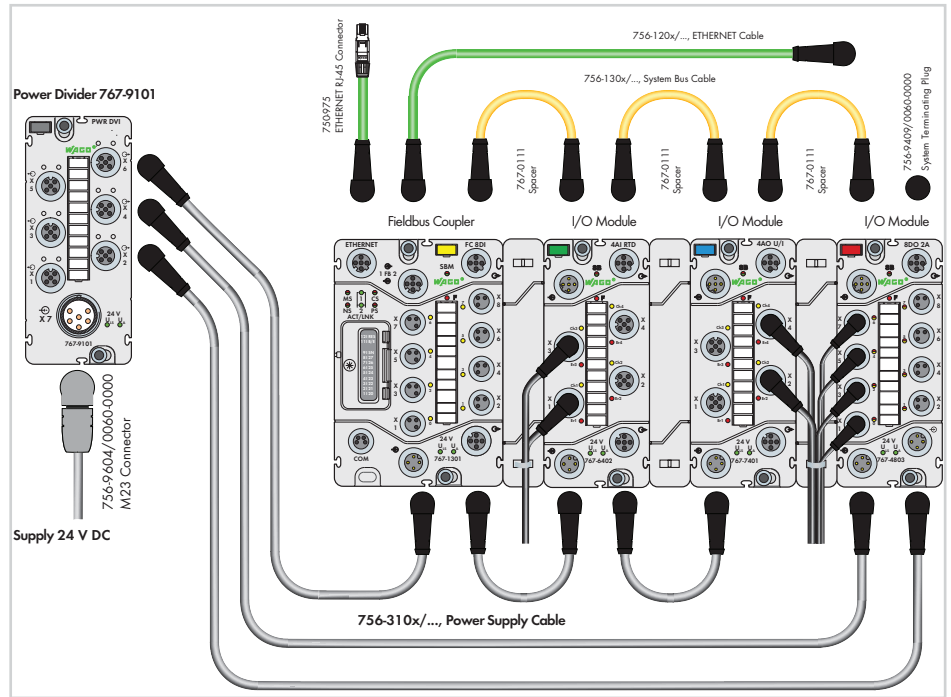

Interference-free in safety-related applications

To safely and easily perform cost-effective, centralized deactivation of complete actuator groups, the actuator's power supply can be switched off using a safety switching device. This can either be performed for each individual actuator or by turning off the power supply to a group of control outputs.

In the event of failure, ensure that no interference from other current or power circuits occurs – even when the control voltage is switched off – so the defined safety function properties (logic and time response) remain unchanged.


Some modules are designed to provide interference-free safety functionality. These modules comply with safety requirements up to Category 4 of DIN EN ISO 13849-1:2007. Safety category and performance level depend solely on the safety components and their wiring.

Attention!


Interference-free WAGO I/O modules have no active influence on the safety function, they are not an active part of the safety application and are not a substitute for the safety switching device! When using the components in safety functions, the corresponding notes must be observed in the corresponding manual.

Attention!

For interference-free operation, it is necessary to lay the power cables separately or to use shielded supplied lines. Please observe the notes in the manual!

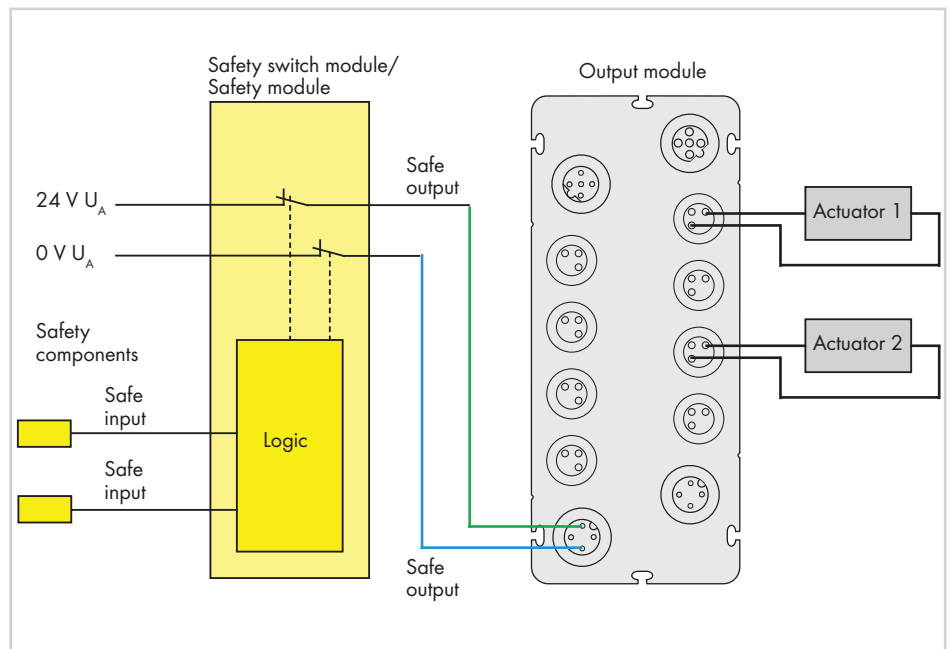


Example: Two-pin shutdown of the power supply of all digital outputs

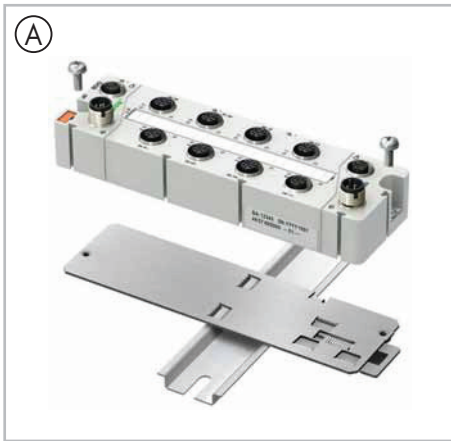

(A) Carrier rail adapter


(B) Profile rail adapter

Available for fieldbus couplers and I/O modules as accessories

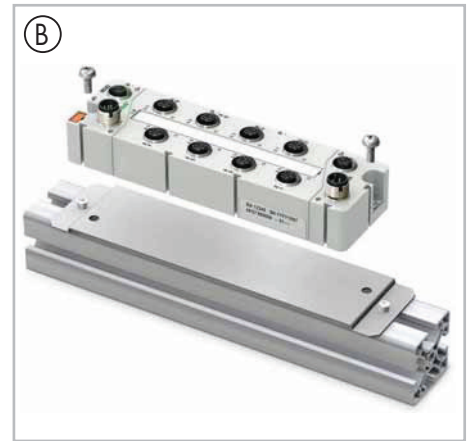

(C) Various versions of drag chain compatible, pre-assembled cables for power supply, system bus, fieldbus and separate pluggable connectors available as accessories

(D) Cable marking via marker sleeves in different lengths for various core diameters (211 Series)

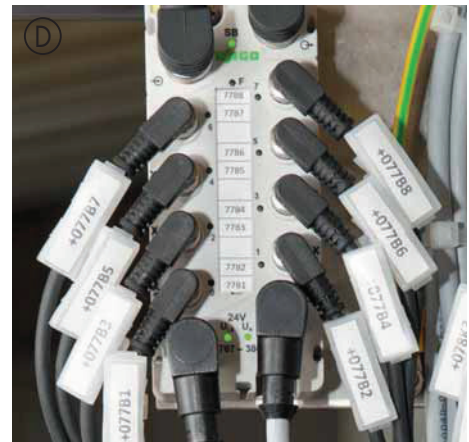


Standards and Rated Conditions

General Specifications

| | |
|---|--|
| Operating voltage | 24 VDC (-25 % ... +30 %) |
| Operating temperature | -25 °C ... +60 °C; temperature change 3 K/s |
| Storage temperature | -40 °C ... +85 °C |
| Relative humidity (without condensation) | 5 % ...95 % |
| Operating altitude | -1000 m ... 2000 m; air pressure 1080 ... 795 hPa |
| Altitude at storage/transport | -1000 m ... 3500 m; air pressure 1080 ... 660 hPa |
| Free fall | ≤ 1 m acc. to EN 61131-2 |
| Degree of contamination | 3 acc. to IEC 60664 (IEC 61131) |
| Protection class | III acc. to IEC 60536 (VDE 0106, Part 1) |
| Vibration resistance | 5g acc. to IEC 60068-2-6 |
| Shock resistance | short-term: 50g/11 ms/half-sine acc. IEC 60068-2-27 long-term: 30g/6 ms/half-sine acc. IEC 60068-2-29 |
| EMC immunity to interference | EN 61000-6-2 |
| EMC emission of interference | EN 61000-6-4 |
| Protection type | IP67 (NEMA 6&6P) acc. to DIN 40050 (EN 60529) |
| Mounting position | any |
| Housing material | Polyamide (PA), light gray (RAL7035); Makrolon (address switch cover), transparent; Flammability acc. to UL94-V0; halogen, silicon-free Potting: Polyurethane (PUR), halogen/silicon-free |
| UV resistance | 1000 h UV continuous light acc. to DIN EN ISO 4892-2B |
| Maximum contaminant concentration | SO ₂ < 0.5 ppm; H ₂ S < 0.1 ppm |
| Current carrying capacity of supply connections | max. 8 A (U _{IS} : 4 A; U _A : 4 A) |

PROFINET IO Fielbus Coupler

incl. 8 digital inputs (8 x M8)

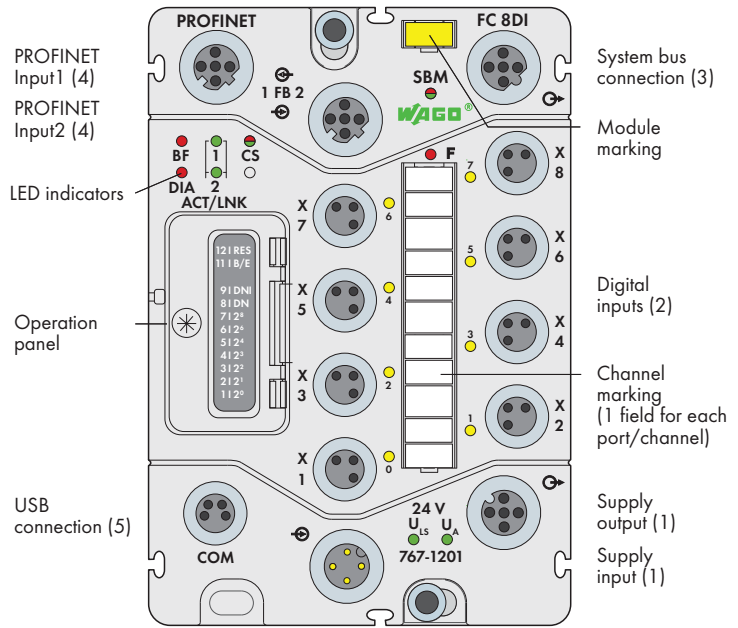

Short description:

PROFINET IO is the ETHERNET-based, manufacturer-independent and open fieldbus standard from PROFIBUS & PROFINET International (PI). This standard offers solutions for manufacturing/process automation and safety applications in addition to covering an entire range of needs from drive technology to synchronous motion control applications.

The fieldbus coupler links the WAGO SPEEDWAY 767 I/O modules to PROFINET IO. The fieldbus coupler creates a process image of all inputs and outputs depending on the station's module structure and the configuration data transmitted by the IO controller. In addition, the coupler provides the connected I/O modules with the parametrization data provided by the device description (GSDML file) and transferred by the IO controller. The device signals existing

module and channel errors as diagnostic alarms.

Characteristics:


- Integrated switch
- 8 digital 24VDC inputs included
- Modular and extendable up to 64 I/O modules (via system bus connection)
- USB interface for servicing purposes
- Parametrization via GSDML or FDT/ DTM (incl. diagnostics and simulation)
- Enclosed operation panel (operating mode and address switch)

Included:


- Module WMB marker card, yellow (1 pcs)
- Channel marker strips (1 pcs)
- M8 protective caps (2 pcs)

| Description | Item No. | Pack. Unit |
|---|--|------------|
| FC PROFINET IO 8DI 24V DC | 767-1201 | 1 |
| Accessories | | |
| PROFINET cable + accessories | see pages 510 + 517 | |
| System bus/power supply cable + accessories | see pages 502 ... 507 + 516 | |
| General accessories | see pages 520 ... 521 | |
| GSDML file | Download: www.wago.com | |
| DTM (Device Type Manager) | Download: www.wago.com | |

| Technical Data | |
|---|---|
| Fieldbus: | |
| Device type | PROFINET IO device |
| Connection type (4) | M12 connectors, D coded, 5 poles |
| Baud rate | 100 Mbit/s, full duplex |
| Transmission medium | 100Base-TX, twisted pair copper cables |
| Station name | Adjustable via operation panel or DCP |
| Protocols | PROFINET IO, DCP, LLDP, SNMP |
| Additional data | see PROFINET specification |
| Module supply: | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity of supply connections | Max. 8 A (U _{IS} : 4 A, U _A : 4 A) |
| Supply voltage | |
| Logic and sensor voltage U _{IS} | 24 V DC (-25 % ... +30 %) |
| Actuator voltage U _A | 24 V DC (-25 % ... +30 %); Also required for power supply transmission |
| Supply current | |
| Logic and sensor current I _{IS} | typ. 125 mA + sensors (max. 400 mA) |
| Actuator current I _A | 5mA |
| Protection | Reverse voltage protection for U _{IS} + U _A ; short circuit protection for sensor supply |

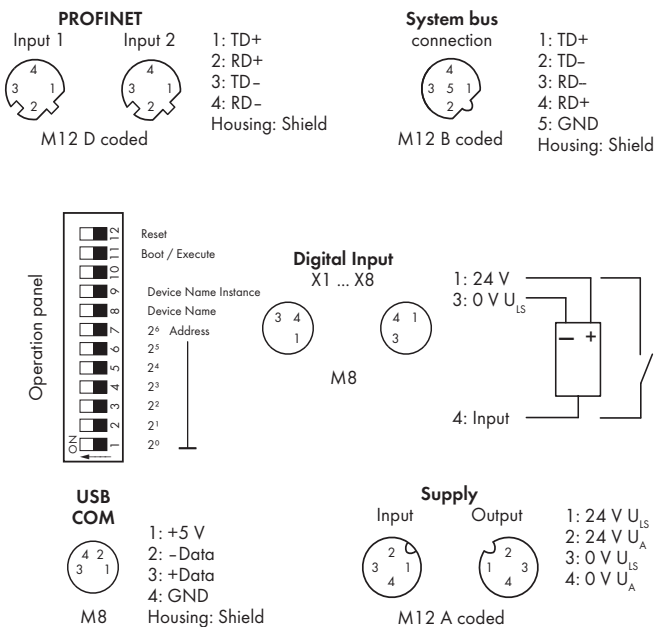

Block diagram of an input

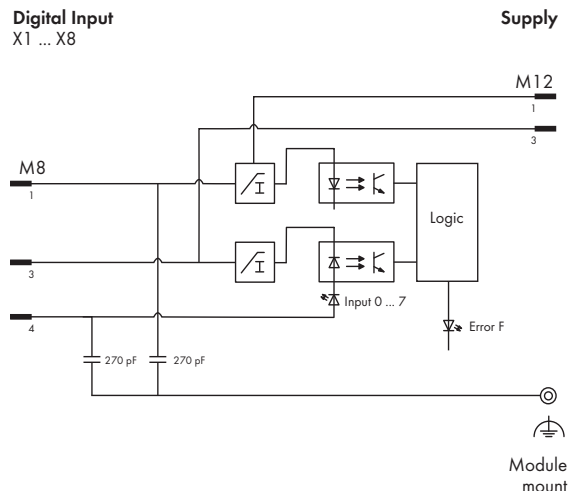**Technical Data****Digital inputs:**

| | |
|----------------------------|--|
| Number of inputs | 8 |
| Connection type (2) | M8 connectors, 3 poles |
| Wire connection | 2- or 3-wire |
| Input filter | parametrizable |
| Input characteristic | Type 1, acc. to IEC 61131-2 |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +15 V ... +30 V DC |
| Input wiring | high-side switching |
| Input voltage | 24 V DC (-30 V DC < U_{IN} < +30 V DC) |
| Input current (typ.) | 2.8 mA |
| Cable length, unshielded | ≤ 30 m |
| Wrong connection of inputs | No effect |

System bus:

| | |
|------------------------------|--|
| Number of expendable modules | 64 |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |

Isolation:

| | |
|---|---------------|
| Channel - Channel | No |
| U_{IS} , U_A , system bus, fieldbus | 500 V DC each |

Service:

| | |
|---------------------|------------------------|
| Type | USB standard 1.1 |
| Connection type (5) | M8 connectors, 4 poles |

Standards and approvals:

| | |
|---------------------|-----------|
| PROFINET | IEC 61158 |
| Conformity marking | CE |
| Korea Certification | |
| UL 508 | |

Configurable functions:

| | |
|---------------------------------|------------------------------------|
| Fieldbus coupler | see manual |
| Digital Inputs | |
| Input filter (per channel) | 0.1/ 0.5/ 3 /15 /20 ms/ filter off |
| Inversion (per channel) | On/off |
| Online simulation (per channel) | Lock/unlock, simulation value: 0/1 |
| Online simulation (per module) | Diagnostics |

I/O diagnostics:

| | |
|------------------------------|--|
| I/O diagnostics (per module) | Short circuit/overload of sensor supply Undervoltage (U_{IS} + U_A) |
|------------------------------|--|

Technical Data**Process image:**


| | |
|----------------------|------------|
| Input process image | 1024 bytes |
| Output process image | 1024 bytes |

LED indicators:


| | |
|--|-----------------|
| BF : PROFINET IO bus error | LED (red) |
| DIA : PROFINET IO diagnostics | LED (red) |
| ACT/LNK 1 : Network connection, fieldbus 1 | LED (green) |
| ACT/LNK 2 : Network connection, fieldbus 2 | LED (green) |
| CS : Fieldbus coupler status | LED (green/red) |
| SBM : System bus master status | LED (green/red) |
| F: Error status | LED (red) |
| 0 ... 7: Input signal status | LED (yellow) |
| U_{IS} + U_A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 75 x 35.7 x 117 |
| Weight | 377.1 g |

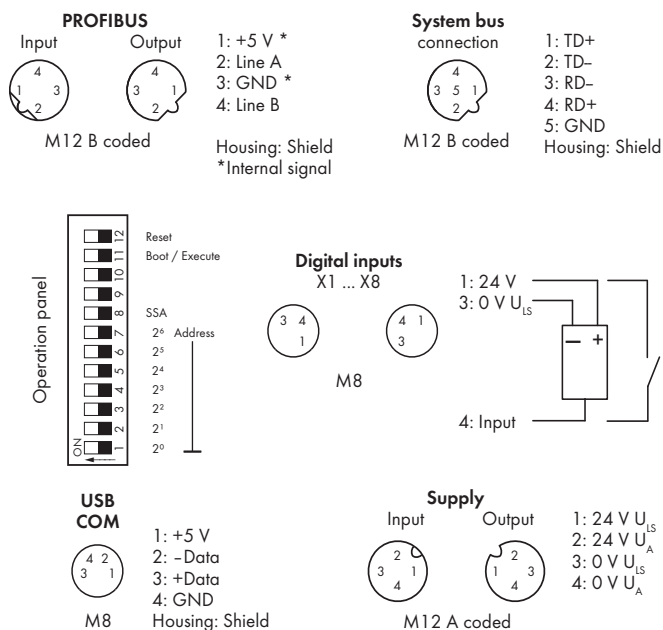

Block diagram of an input

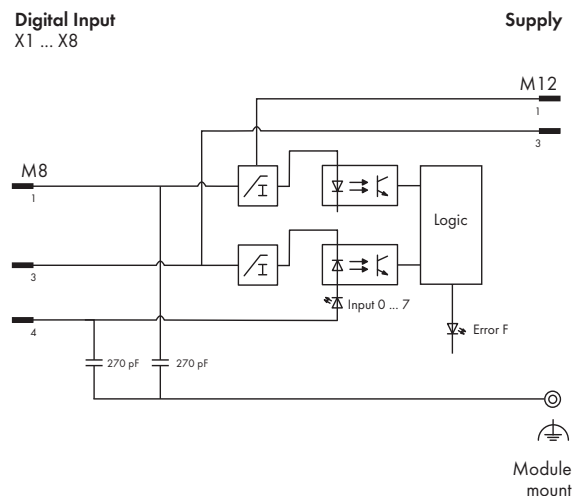

Technical Data

Digital inputs:

| | |
|----------------------------|---|
| Number of inputs | 8 |
| Connection type (2) | M8 connectors, 3 poles |
| Wire connection | 2- or 3-wire |
| Input filter | parametrizable |
| Input characteristic | Type 1, acc. to IEC 61131-2 |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +15 V ... +30 V DC |
| Input wiring | high-side switching |
| Input voltage | 24 V DC (-30 V DC < U _{IN} < +30 V DC) |
| Input current (typ.) | 2.8 mA |
| Cable length, unshielded | ≤ 30 m |
| Wrong connection of inputs | No effect |

System bus:

| | |
|------------------------------|--|
| Number of expendable modules | 63 |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |

Isolation:

| | |
|---|---------------|
| Channel - Channel | No |
| U _{IS} , U _A , system bus, fieldbus | 500 V DC each |

Service:

| | |
|---------------------|------------------------|
| Type | USB standard 1.1 |
| Connection type (5) | M8 connectors, 4 poles |

Standards and approvals:

| | |
|---------------------|-----------|
| PROFIBUS | IEC 61158 |
| Conformity marking | CE |
| Korea Certification | KCC |
| UL 508 | UL 508 |

Configurable functions:

| | |
|---------------------------------|------------------------------------|
| Fieldbus coupler | see manual |
| Digital Inputs | |
| Input filter (per channel) | 0.1/ 0.5/ 3 /15 /20 ms/ filter off |
| Inversion (per channel) | On/off |
| Online simulation (per channel) | Lock/unlock, simulation value: 0/1 |
| Online simulation (per module) | Diagnostics |

I/O diagnostics:

| | |
|------------------------------|---|
| I/O diagnostics (per module) | Short circuit/overload of sensor supply Undervoltage (U _{IS} + U _A) |
|------------------------------|---|

Technical Data

Process image:

| | |
|----------------------|-----------|
| Input process image | 244 bytes |
| Output process image | 244 bytes |

LED indicators:


| | |
|--|-----------------|
| RUN : Fieldbus coupler initialization | LED (green/red) |
| BF : PROFIBUS DP bus error | LED (red) |
| DIA : PROFIBUS DP diagnostics | LED (red) |
| BUS : PROFIBUS DP projecting error | LED (red) |
| CS : Fieldbus coupler status | LED (green/red) |
| SBM : System bus master status | LED (green/red) |
| F: Error status | LED (red) |
| 0 ... 7: Input signal status | LED (yellow) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 75 x 35.7 x 117 |
| Weight | 405 g |

ETHERNET Fieldbus Coupler

incl. 8 digital inputs (8 x M8)

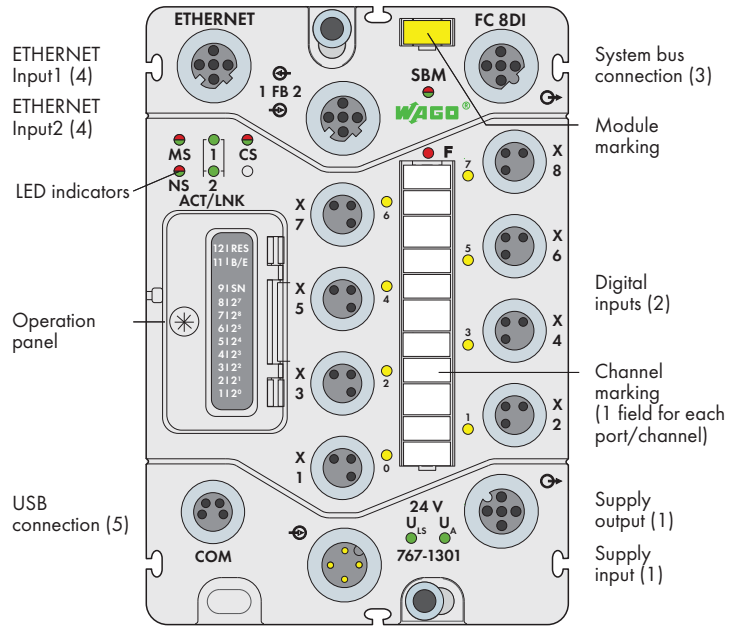

Short description:

In addition to MODBUS/TCP, the ETHERNET/IP protocol has proven itself as an industrial communication standard over ETHERNET. The fieldbus coupler links the WAGO SPEEDWAY 767 system to ETHERNET. When initializing, the buscoupler determines the station's module structure and creates a process image of all inputs and outputs. The application protocols MODBUS/TCP and ETHERNET/IP are available for process data and the protocol services Http, BootP, DHCP, DNS, SNTP, FTP and SNMP (on request) for the system administration and diagnostics.

Characteristics:



- Integrated switch
- 8 digital 24VDC inputs included
- Modular and extendable up to 64 I/O modules (via system bus connection)
- USB interface for servicing purposes
- Parametrization via FDT/DTM (incl. diagnostics and simulation)
- Enclosed operation panel (operating mode and address switch)

Included:

- Module WMB marker card, yellow (1 pcs)
- Channel marker strips (1 pcs)
- M8 protective caps (2 pcs)

| Description | Item No. | Pack. Unit |
|---|-----------------------------|------------|
| FC ETHERNET 8DI 24V DC | 767-1301 | 1 |
| Accessories | | |
| ETHERNET cable + accessories | see pages 510 + 517 | |
| System bus/power supply cable + accessories | see pages 502 ... 507 + 516 | |
| General accessories | see pages 520 ... 521 | |
| DTM (Device Type Manager) | Download: www.wago.com | |

| Technical Data | |
|---|--|
| Fieldbus: | |
| Device type | ETHERNET device |
| Connection type (4) | M12 connectors, D coded, 4 poles |
| Baud rate | 10/100 Mbit/s |
| Transmission medium | Copper cable |
| Station address | 1-255 (last byte of IP address adjustable via operation panel) |
| Protocols | MODBUS/TCP (UDP), EtherNet/IP |
| Additional data | see manual |
| Module supply: | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity of supply connections | Max. 8 A (U _{IS} : 4 A, U _A : 4 A) |
| Supply voltage | |
| Logic and sensor voltage U _{IS} | 24 V DC (-25 % ... +30 %) |
| Actuator voltage U _A | 24 V DC (-25 % ... +30 %); Also required for power supply transmission |
| Supply current | |
| Logic and sensor current I _S | typ. 125 mA + sensors (max. 400 mA) |
| Actuator current I _A | 5mA |
| Protection | Reverse voltage protection for U _{IS} + U _A ; short circuit protection for sensor supply |

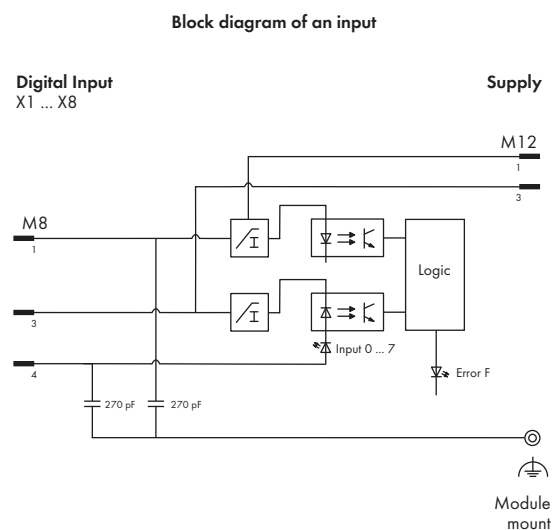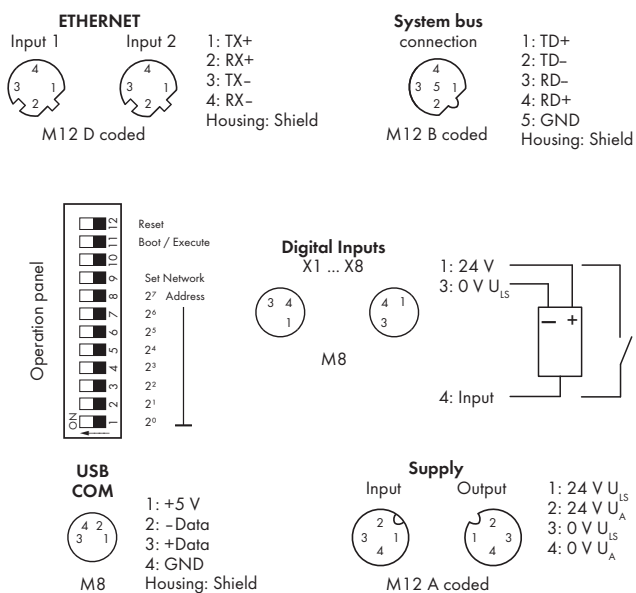

Technical Data

Digital inputs:

| | |
|----------------------------|---|
| Number of inputs | 8 |
| Connection type (2) | M8 connectors, 3 poles |
| Wire connection | 2- or 3-wire |
| Input filter | parametrizable |
| Input characteristic | Type 1, acc. to IEC 61131-2 |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +15 V ... +30 V DC |
| Input wiring | high-side switching |
| Input voltage | 24 V DC (-30 V DC < U _{IN} < +30 V DC) |
| Input current (typ.) | 2.8 mA |
| Cable length, unshielded | ≤ 30 m |
| Wrong connection of inputs | No effect |

System bus:

| | |
|------------------------------|--|
| Number of expendable modules | 64 |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |

Isolation:

| | |
|---|---------------|
| Channel - Channel | No |
| U _{IS} , U _A , system bus, fieldbus | 500 V DC each |

Service:

| | |
|---------------------|------------------------|
| Type | USB standard 1.1 |
| Connection type (5) | M8 connectors, 4 poles |

Standards and approvals:

| | |
|---------------------|--------|
| Conformity marking | CE |
| Korea Certification | KCC |
| UL 508 | UL 508 |

Configurable functions:

| | |
|---------------------------------|------------------------------------|
| Fieldbus coupler | see manual |
| Digital Inputs | |
| Input filter (per channel) | 0.1/ 0.5/ 3 /15 /20 ms/ filter off |
| Inversion (per channel) | On/off |
| Online simulation (per channel) | Lock/unlock, simulation value: 0/1 |
| Online simulation (per module) | Diagnostics |

I/O diagnostics:

| | |
|------------------------------|---|
| I/O diagnostics (per module) | Short circuit/overload of sensor supply Undervoltage (U _{IS} + U _A) |
|------------------------------|---|

Technical Data

Process image:



| | |
|----------------------|------------|
| Input process image | 2048 bytes |
| Output process image | 2048 bytes |

LED indicators:

| | |
|---|-----------------|
| MS : ETHERNET module status | LED (green/red) |
| NS : ETHERNET network status | LED (green/red) |
| ACT/LNK 1 : ETHERNET data exchange/network connection | LED (green) |
| ACT/LNK 2 : ETHERNET data exchange/network connection | LED (green) |
| CS : Fieldbus coupler status | LED (green/red) |
| SBM : System bus master status | LED (green/red) |
| F: Error status | LED (red) |
| 0 ... 7: Input signal status | LED (yellow) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 75 x 35.7 x 117 |
| Weight | 400 g |

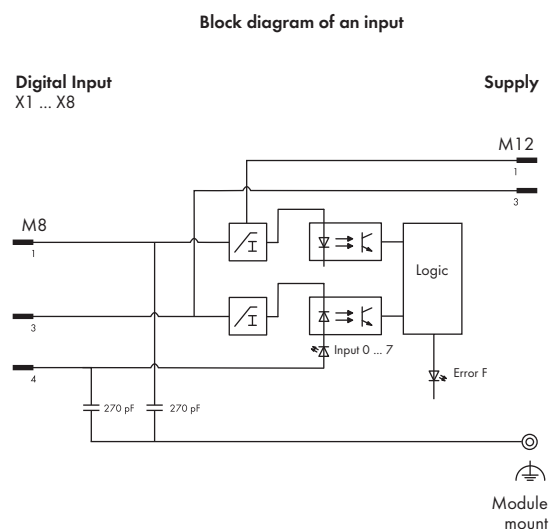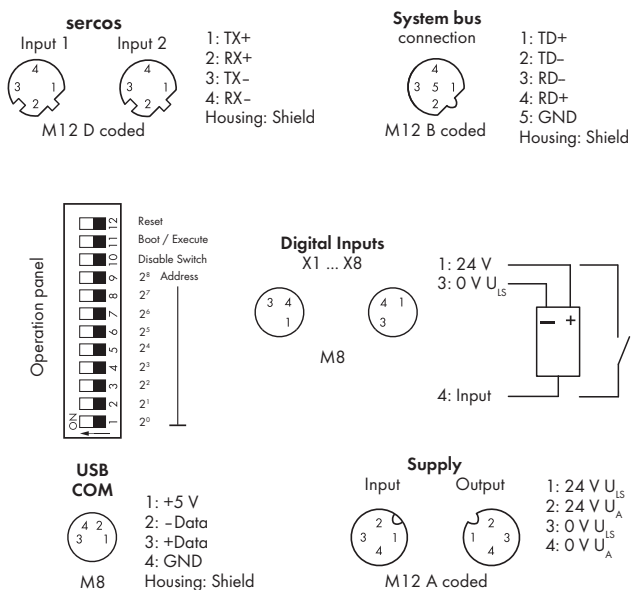

Technical Data


| | |
|---|--|
| Digital inputs: | |
| Number of inputs | 8 |
| Connection type (2) | M8 connectors, 3 poles |
| Wire connection | 2- or 3-wire |
| Input filter | Hardware: ≤ 10 μs, software parametrizable depending on operating mode |
| Hardware delay up to fieldbus | 10 μs (direct mode) |
| Input characteristic | Type 1, acc. to IEC 61131-2 |
| Signal voltage (0) | -3 VDC ... +5 VDC |
| Signal voltage (1) | +15 V ... +30 V DC |
| Input wiring | high-side switching |
| Input voltage | 24 VDC (-30 VDC < U _{IN} < +30 VDC) |
| Input current (typ.) | 2.8 mA |
| Cable length, unshielded | ≤ 30 m |
| Wrong connection of inputs | No effect |
| System bus: | |
| Cycle time | min. 250 μs |
| Number of expendable modules | 64 |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
| Distance between two modules | 20 m |
| Total extension per station | 200 m |
| Isolation: | |
| Channel - Channel | No |
| U _{IS} , U _A , system bus, fieldbus | 500 VDC each |
| Service: | |
| Type | USB standard 1.1 |
| Connection type (5) | M8 connectors, 4 poles |
| Standards and approvals: | |
| Conformity marking | CE |
| UL 508 | |
| Configurable functions: | |
| Fieldbus coupler | see manual |
| Digital Inputs | |
| Input filter (per channel) | depending on operating mode |
| | 0.1/ 0.5/ 3 /15 /20 ms/ filter off |
| Inversion (per channel) | On/off |
| Online simulation (per channel) | Lock/unlock, simulation value: 0/1 |
| I/O diagnostics: | |
| I/O diagnostics (per module) | Short circuit of sensor supply Undervoltage (U _{IS} + U _A) |

Technical Data

| | |
|---|--|
| Process image: | |
| Input process image | 2048 bytes |
| Output process image | 2048 bytes |
| LED indicators: | |
| MS: Module status | LED (green/red) |
| S3: sercos status | LED (green/red) |
| ACT/LNK 1 : ETHERNET data exchange/network connection | LED (green) |
| ACT/LNK 2 : ETHERNET data exchange/network connection | LED (green) |
| CS : Fieldbus coupler status | LED (green/red) |
| SBM : System bus master status | LED (green/red) |
| F: Error status | LED (red) |
| 0 ... 7: Input signal status | LED (yellow) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |
| Advanced features: | |
| Operating hours counter | Values in [h] |
| High-speed inputs | parametrizable, depending on operating mode (see manual) |
| General Specifications | |
| Dimensions (mm) W x H x L | 75 x 35.7 x 117 |
| Weight | 400 g |

DeviceNet Fieldbus Coupler

incl. 8 digital inputs (8 x M8)

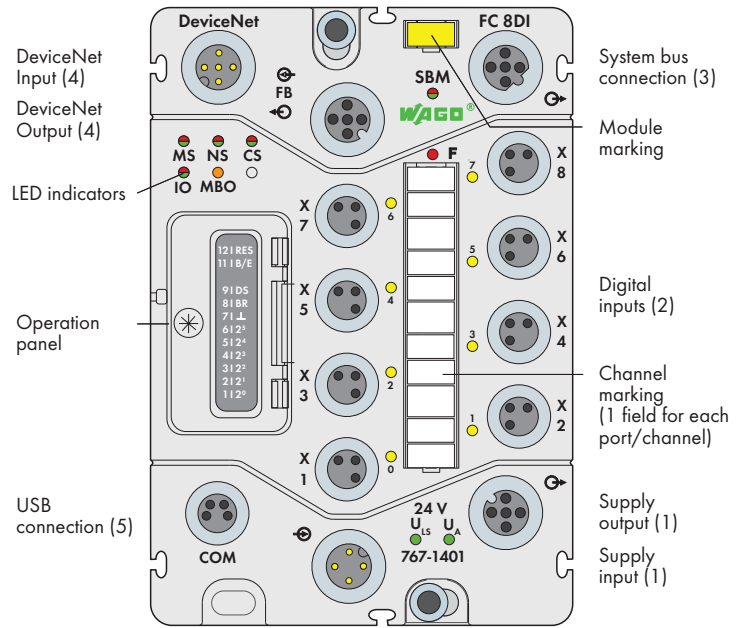

Short description:

DeviceNet is a manufacturer-independent, open CAN-based fieldbus protocol typically used for networking sensors and actuators with higher-level automation devices. It operates in both master-slave and multi-master modes, while active participants communicate via a point-to-point or a multipoint connection.

As a slave, the fieldbus coupler links the WAGO SPEEDWAY 767 system to DeviceNet. When initializing, the buscoupler determines the station's module structure and creates a process image of all inputs and outputs.

Characteristics:



- 8 digital 24VDC inputs included
- Modular and extendable up to 64 I/O modules (via system bus connection)
- USB interface for servicing purposes
- Parametrization via FDT/DTM (incl. diagnostics and simulation)
- Enclosed operation panel (operating mode and address switch)

Included:

- Module WMB marker card, yellow (1 pcs)
- Channel marker strips (1 pcs)
- M8 protective caps (2 pcs)

| Description | Item No. | Pack. Unit |
|---|--|------------|
| FC DeviceNet 8DI 24V DC | 767-1401 | 1 |
| Accessories | | |
| DeviceNet cable + accessories | see pages 500 ... 501 | |
| System bus/power supply cable + accessories | see pages 502 ... 507 + 516 | |
| General accessories | see pages 520 ... 521 | |
| EDS files | Download: www.wago.com | |
| DTM (Device Type Manager) | Download: www.wago.com | |

| Technical Data | |
|---|---|
| Fieldbus: | |
| Device type | DevieNet Slave |
| Connection type (4) | M12 connectors, A coded, 5 poles |
| Baud rate | 125/ 250/ 500 Kbit/s |
| Transmission medium | Copper cable |
| Station address | 0-63 (adjustable via operation panel) |
| Additional data | see manual |
| Module supply: | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity of supply connections | |
| Supply voltage | Max. 8 A (U _{IS} : 4 A, U _A : 4 A) |
| Logic and sensor voltage U _{IS} | 24 V DC (-25 % ... +30 %) |
| Actuator voltage U _A | 24 V DC (-25 % ... +30 %); Also required for power supply transmission |
| Supply current | |
| Logic and sensor current I _{IS} | typ. 80 mA + sensors (max. 400 mA) |
| Actuator current I _A | 5mA |
| Protection | Reverse voltage protection for U _{IS} + U _A ; short circuit protection for sensor supply |

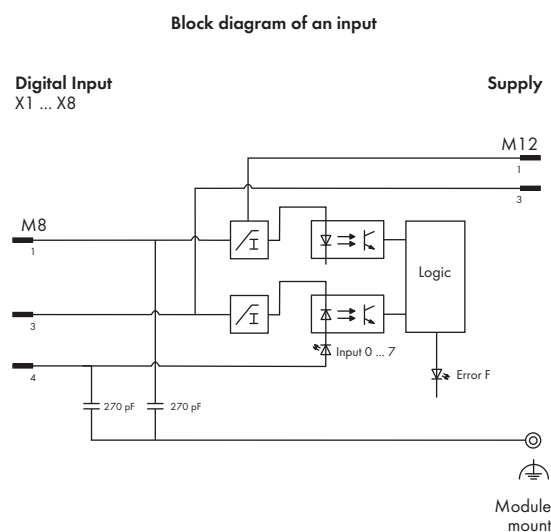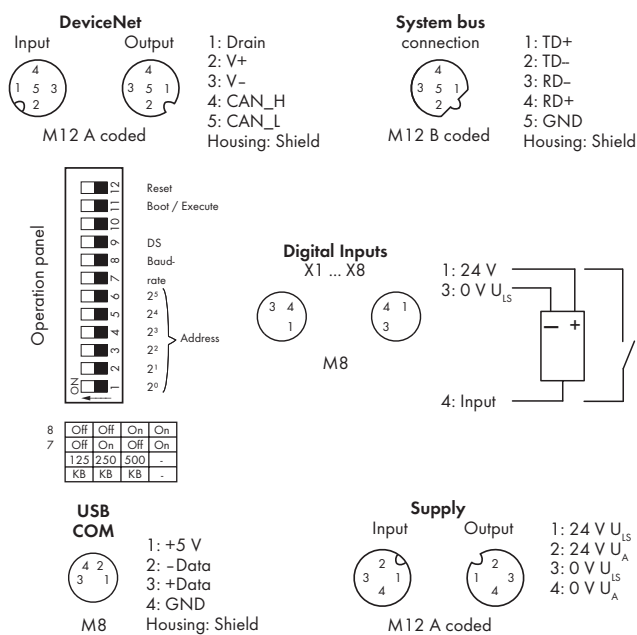

Technical Data

Digital inputs:

| | |
|----------------------------|---|
| Number of inputs | 8 |
| Connection type (2) | M8 connectors, 3 poles |
| Wire connection | 2- or 3-wire |
| Input filter | parametrizable |
| Input characteristic | Type 1, acc. to IEC 61131-2 |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +15 V ... +30 V DC |
| Input wiring | high-side switching |
| Input voltage | 24 V DC (-30 V DC < U _{IN} < +30 V DC) |
| Input current (typ.) | 2.8 mA |
| Cable length, unshielded | ≤ 30 m |
| Wrong connection of inputs | No effect |

System bus:

| | |
|------------------------------|--|
| Number of expendable modules | 64 |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |

Isolation:

| | |
|---|---------------|
| Channel - Channel | No |
| U _{IS} , U _A , system bus, fieldbus | 500 V DC each |

Service:

| | |
|---------------------|------------------------|
| Type | USB standard 1.1 |
| Connection type (5) | M8 connectors, 4 poles |

Standards and approvals:

| | |
|---------------------|-----------------------|
| DeviceNet | IEC62026-3, EN50325-2 |
| Conformity marking | CE |
| Korea Certification | KCC |
| UL 508 | UL 508 |

Configurable functions:

| | |
|---------------------------------|------------------------------------|
| Fieldbus coupler | see manual |
| Digital Inputs | |
| Input filter (per channel) | 0.1/ 0.5/ 3 /15 /20 ms/ filter off |
| Inversion (per channel) | On/off |
| Online simulation (per channel) | Lock/unlock, simulation value: 0/1 |
| Online simulation (per module) | Diagnostics |

I/O diagnostics:

| | |
|------------------------------|---|
| I/O diagnostics (per module) | Short circuit/overload of sensor supply Undervoltage (U _{IS} + U _A) |
|------------------------------|---|

Technical Data

Process image:



| | |
|----------------------|------------|
| Input process image | 2048 bytes |
| Output process image | 2048 bytes |

LED indicators:

| | |
|--|-----------------|
| MS: DeviceNet module status | LED (green/red) |
| IO: IO status | LED (green/red) |
| NS: DeviceNet network status | LED (green/red) |
| MBO: MAC-ID/Baud rate overwritten | LED (orange) |
| CS : Fieldbus coupler status | LED (green/red) |
| SBM : System bus master status | LED (green/red) |
| F: Error status | LED (red) |
| 0 ... 7: Input signal status | LED (yellow) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |




General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 75 x 35.7 x 117 |
| Weight | 388 g |

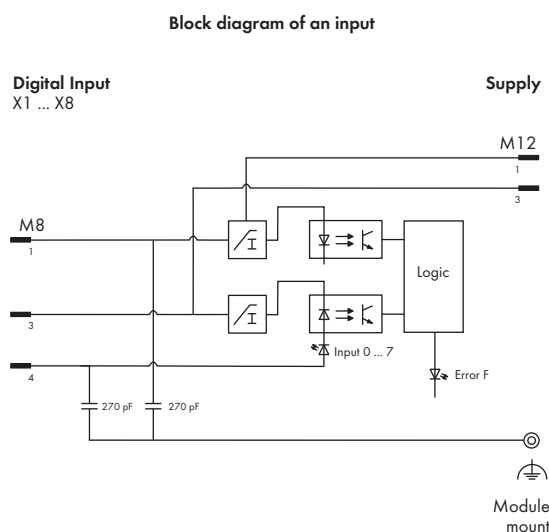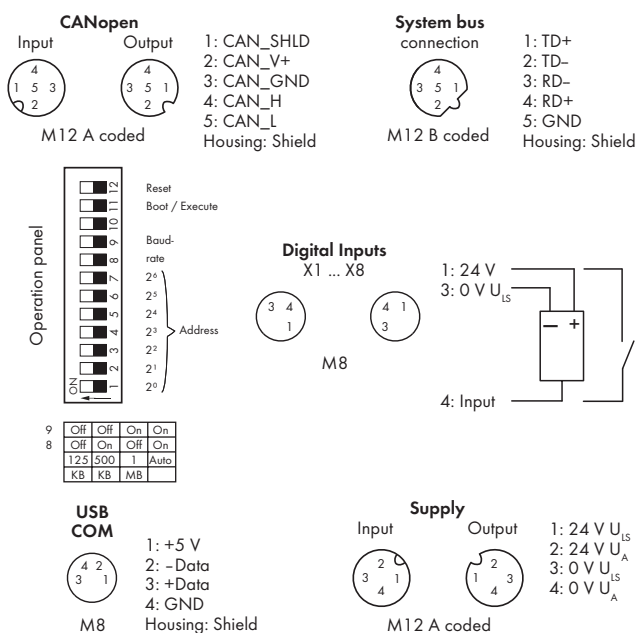


| Technical Data | |
|---|---|
| Digital inputs: | |
| Number of inputs | 8 |
| Connection type (2) | M8 connectors, 3 poles |
| Wire connection | 2- or 3-wire |
| Input filter | parametrizable |
| Input characteristic | Type 1, acc. to IEC 61131-2 |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +15 V ... +30 V DC |
| Input wiring | high-side switching |
| Input voltage | 24 V DC (-30 V DC < U _{IN} < +30 V DC) |
| Input current (typ.) | 2.8 mA |
| Cable length, unshielded | ≤ 30 m |
| Wrong connection of inputs | No effect |
| System bus: | |
| Number of expendable modules | 64 |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
| Isolation: | |
| Channel - Channel | No |
| U _{IS} , U _A , system bus, fieldbus | 500 V DC each |
| Service: | |
| Type | USB standard 1.1 |
| Connection type (5) | M8 connectors, 4 poles |
| Standards and approvals: | |
| Conformity marking | CE |
| Korea Certification | KCC |
| UL 508 | UL 508 |
| Configurable functions: | |
| Fieldbus coupler | see manual |
| Digital Inputs | |
| Input filter (per channel) | 0.1/ 0.5/ 3 /15 /20 ms/ filter off |
| Inversion (per channel) | On/off |
| Online simulation (per channel) | Lock/unlock, simulation value: 0/1 |
| Online simulation (per module) | Diagnostics |
| I/O diagnostics: | |
| I/O diagnostics (per module) | Short circuit/overload of sensor supply Undervoltage (U _{IS} + U _A) |

| Technical Data | |
|--|-----------------|
| Process image: | |
| Input process image | 512 bytes |
| Output process image | 512 bytes |
| LED indicators: | |
| RUN: CANopen status | LED (green) |
| RX: CANopen receiver buffer | LED (red) |
| ERR: CANopen bus error | LED (red) |
| TX: CANopen transmit buffer | LED (red) |
| CS : Fieldbus coupler status | LED (green/red) |
| SBM : System bus master status | LED (green/red) |
| F: Error status | LED (red) |
| 0 ... 7: Input signal status | LED (yellow) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |
| General Specifications | |
| Dimensions (mm) W x H x L | 75 x 35.7 x 117 |
| Weight | 377 g |

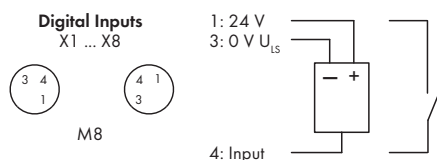

Block diagram of an input

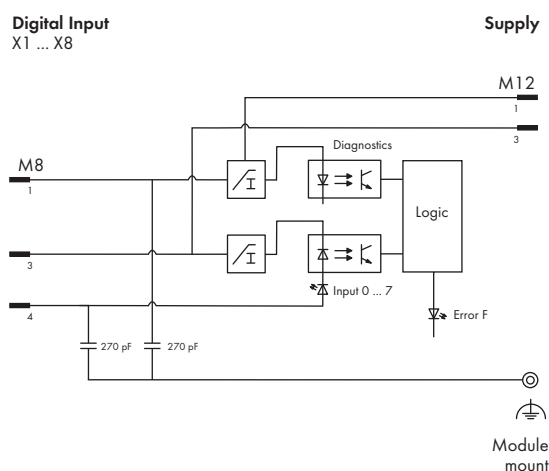

Technical Data

Input characteristic:

| Input voltage | Typical input current |
|------------------------------|-----------------------|
| -30 V DC < U_{IN} < 0 V DC | 0 |
| 5 V | 2.4 mA |
| 11 V | 6.4 mA |
| 24 V | 7.3 mA |
| 30 V | 7.4 mA |

System bus:

| | |
|---------------------|--|
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|---------------------|----|
| Conformity marking | CE |
| Korea Certification | K |
| UL 508 | |

Technical Data

Isolation:

| | |
|-------------------------------|---------------|
| Channel - Channel | No |
| U_{IS} , U_{A} system bus | 500 V DC each |

Configurable functions:

| | |
|---------------------------------|---|
| Input filter (per channel) | 0.1 / 0.5 / 3 / 15 / 20 ms / filter off |
| Inversion (per channel) | On/off |
| Online simulation (per channel) | Lock/unlock, simulation value: 0/1 |
| Online simulation (per module) | Diagnostics |

I/O diagnostics:

| | |
|------------------------------|--|
| I/O diagnostics (per module) | Short circuit/overload of sensor supply Undervoltage (U_{IS} + U_{A}) |
|------------------------------|--|

Process image:

| | |
|--------------------|----------------------|
| Process data width | 1-byte data + status |
|--------------------|----------------------|

LED indicators:


| | |
|------------------------------------|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Input signal status | LED (yellow) |
| U_{IS} + U_{A} : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 270 g |

Digital Input Module 24 V DC

8 inputs (4 x M12, two outputs per connector)

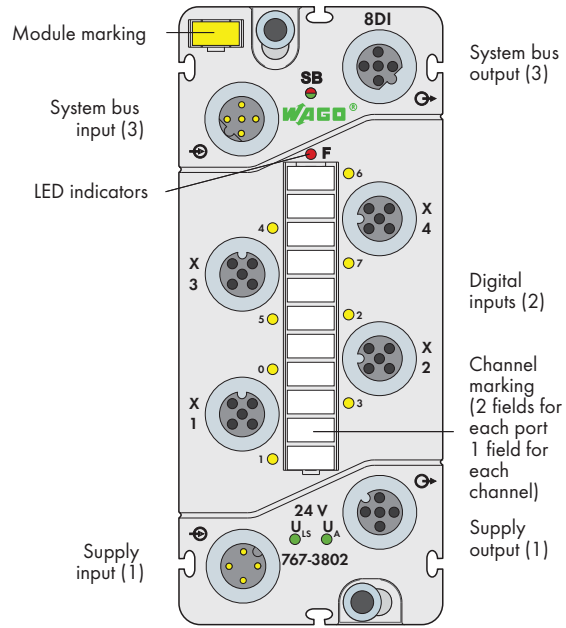

Short description:

Digital input module records binary signals from switches, sensors and proximity switches (BEROs).

Characteristics:





- 8 digital inputs DC 24 V
- Diagnostic capable (per module)
- Parametrizable (filter, inversion, online simulation and diagnostics)

Included:

- Module WMB marker card, yellow (1 pcs)
- Marker strips (1 pcs)
- M12 protective caps (2 pcs)


| Description | Item No. | Pack. Unit |
|--|------------------------------------|------------|
| 8DI 24V DC (4xM12) | 767-3802 | 1 |
| Accessories | | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |

| Technical Data | |
|---|--|
| Module supply: | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity of supply connections | Max. 8 A (U_{IS} : 4 A, U_A : 4 A) |
| Supply voltage | |
| Logic and sensor voltage U_{IS} | 24 V DC (-25 % ... +30 %) |
| Actuator voltage U_A | 24 V DC (-25 % ... +30 %); Also required for power supply transmission |
| Supply current | |
| Logic and sensor current I_{IS} | typ. 40 mA + sensors (max. 400 mA) |
| Actuator current I_A | 5 mA |
| Protection | Reverse voltage protection for U_{IS} + U_A ; short circuit protection for sensor supply |
| Digital inputs: | |
| Number of inputs | 8 |
| Connection type (2) | M12 connectors, A coded, 4 poles |
| Wire connection | 2- or 3-wire |
| Input filter | Hardware: $\leq 80 \mu s$ Software: parametrizable |
| Input characteristic | Type 2, acc. to IEC 61131-2 |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +11 V ... +30 V DC |
| Input wiring | high-side switching |
| Input voltage | 24 V DC (-30 V DC < U_{IN} < +30 V DC) |
| Input current (typ.) | 7.3 mA |
| Connection of 2-wire BEROs | max. 1.5 mA admissible closed current |
| Cable length, unshielded | ≤ 30 m |
| Wrong connection of inputs | No effect |

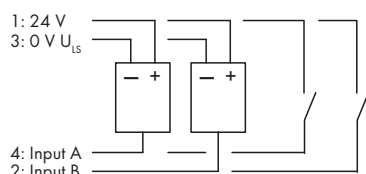




1: 24 V U_{IS}
2: 24 V U_A
3: 0 V U_{IS}
4: 0 V U_A

Block diagram of an input

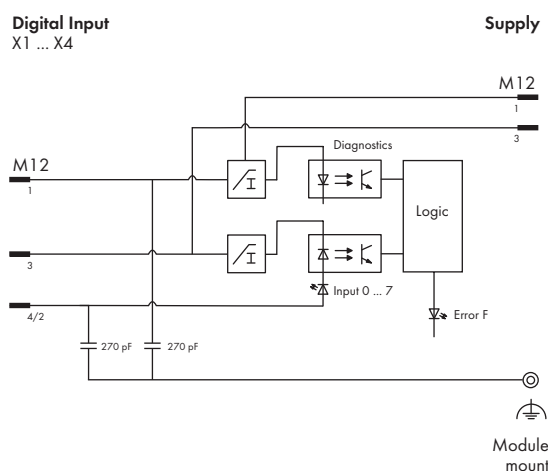


| Technical Data | |
|-------------------------------------|--|
| Input characteristic: | |
| Input voltage | Typical input current |
| -30 V DC < U _{IN} < 0 V DC | 0 |
| 5 V | 2.4 mA |
| 11 V | 6.4 mA |
| 24 V | 7.3 mA |
| 30 V | 7.4 mA |
| System bus: | |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
| Standards and approvals: | |
| Conformity marking | CE |
| Korea Certification | KCC |
| UL 508 | |

| Technical Data | |
|--|---|
| Isolation: | |
| Channel - Channel | No |
| U _{IS} , U _A system bus | 500 V DC each |
| Configurable functions: | |
| Input filter (per channel) | 0.1/ 0.5/ 3 /15 /20 ms/ filter off |
| Inversion (per channel) | On/off |
| Online simulation (per channel) | Lock/unlock, simulation value: 0/1 |
| Online simulation (per module) | Diagnostics |
| I/O diagnostics: | |
| I/O diagnostics (per module) | Short circuit/overload of sensor supply Undervoltage (U _{IS} + U _A) |
| Process image: | |
| Process data width | 1-byte data + status |
| LED indicators: | |
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Input signal status | LED (yellow) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |
| General Specifications | |
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 282 g |

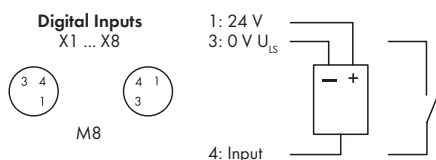

Block diagram of an input

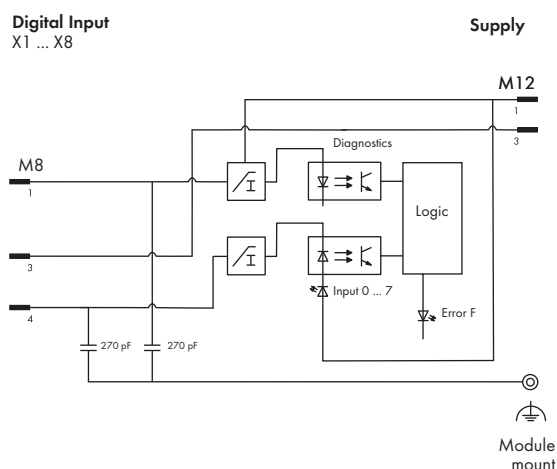**Technical Data****Input characteristic:**

| Input voltage | Typical input current |
|-----------------------|-----------------------|
| U_{IN} | 0mA |
| $U_{IN} - 5V$ | 2.2 mA |
| $U_{IN} - 11V$ | 6.1 mA ... 6.3 mA |
| $-3 V < U_{IN} < 0 V$ | 7mA |

System bus:

| | |
|---------------------|--|
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|---------------------|----|
| Conformity marking | CE |
| Korea Certification | |
| UL 508 | |

Technical Data**Isolation:**

| | |
|-------------------------------|---------------|
| Channel - Channel | No |
| U_{IS} , U_A , system bus | 500 V DC each |

Configurable functions:

| | |
|---------------------------------|------------------------------------|
| Input filter (per channel) | 0.1/ 0.5/ 3 /15 /20 ms/ filter off |
| Inversion (per channel) | On/off |
| Online simulation (per channel) | Lock/unlock, simulation value: 0/1 |
| Online simulation (per module) | Diagnostics |

I/O diagnostics:

| | |
|------------------------------|--|
| I/O diagnostics (per module) | Short circuit/overload of sensor supply Undervoltage ($U_{IS} + U_A$) |
|------------------------------|--|

Process image:

| | |
|--------------------|----------------------|
| Process data width | 1-byte data + status |
|--------------------|----------------------|

LED indicators:


| | |
|--------------------------------|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Input signal status | LED (yellow) |
| $U_{IS} + U_A$: Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 270 g |

Digital Input Module 24 V DC

8 inputs (4 x M12, two inputs per connector), low-side switching

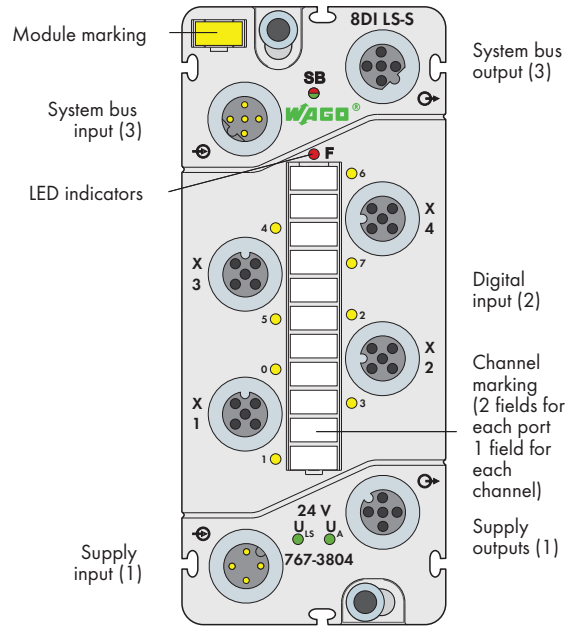

Short description:

This digital input module records binary signals from switches, sensors and proximity switches (BEROs).

Characteristics:


- 8 digital inputs DC 24 V, low-side switching
- Diagnostic capable (per module)
- Parametrizable (filter, inversion, online simulation and diagnostics)

Included:

- Module WMB marker card, yellow
- Marker strip
- M12 protective caps (2 pcs)

| Description | Item No. | Pack. Unit |
|--|------------------------------------|------------|
| 8DI 24V DC LS SWITCH (4xM12) | 767-3804 | 1 |
| Accessories | | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |

| Technical Data | |
|---|--|
| Module supply: | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity of supply connections | Max. 8 A (U_{IS} : 4 A, U_A : 4 A) |
| Supply voltage | |
| Logic and sensor voltage U_{IS} | 24 V DC (-25 % ... +30 %) |
| Actuator voltage U_A | 24 V DC (-25 % ... +30 %); Also required for power supply transmission |
| Supply current | |
| Logic and sensor current I_{IS} | Typ. 40 mA + sensors (max. 400 mA) |
| Actuator current I_A | 5mA |
| Protection | Reverse voltage protection for U_{IS} + U_A ; Short circuit protection for sensor supply |
| Digital inputs: | |
| Number of inputs | 8 |
| Connection type (2) | M12 connectors, A coded, 4 poles |
| Wire connection | 2- or 3-wire |
| Input filter | HW: $\leq 80 \mu s$ SW: parametrizable |
| Signal voltage (0) | $(U_{IS} - 5V) \dots U_{IS}$ |
| Signal voltage (1) | - 3V ... $(U_{IS} - 11V)$ |
| Input wiring | Low-side switching |
| Input voltage | 24 V DC (-3 V DC < U_{IN} < +30 V DC) |
| Input current (typ.) | 7mA |
| Connection of 2-wire BEROs | Permitted bias current: max. 1.5 mA |
| Cable length, unshielded | ≤ 30 m |
| Wrong connection of inputs | No effect |





Digital Inputs X1 ... X4
(two inputs/connector)




1: 24 V
3: 0 V U_{IS}

4: Input A
2: Input B



1: 24 V U_{IS}
2: 24 V U_A
3: 0 V U_{IS}
4: 0 V U_A

Block diagram of an input

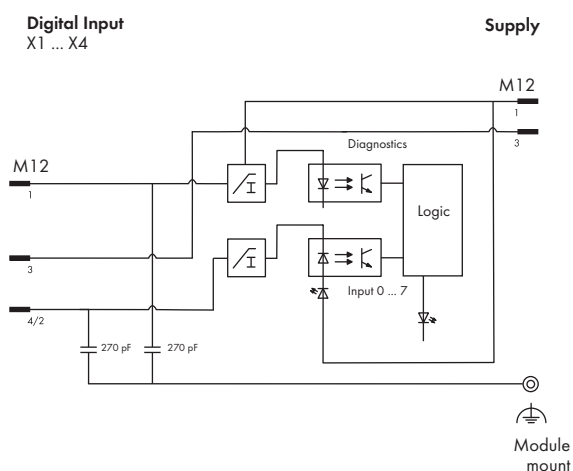

Technical Data

Input characteristic:

| Input voltage | Typical input current |
|-----------------------|-----------------------|
| U_{IN} | 0mA |
| $U_{IN} - 5V$ | 2.2 mA |
| $U_{IN} - 11V$ | 6.1 mA ... 6.3 mA |
| $-3 V < U_{IN} < 0 V$ | 7mA |

System bus:

| | |
|---------------------|--|
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|---------------------|----|
| Conformity marking | CE |
| Korea Certification | |
| UL 508 | |

Technical Data

Isolation:

| | |
|-----------------------------|---------------|
| Channel - Channel | No |
| U_{IS} , U_A system bus | 500 V DC each |

Configurable functions:

| | |
|---------------------------------|---|
| Input filter (per channel) | 0.1 / 0.5 / 3 / 15 / 20 ms / filter off |
| Inversion (per channel) | On/off |
| Online simulation (per channel) | Lock/unlock, simulation value: 0/1 |
| Online simulation (per module) | Diagnostics |

I/O diagnostics:

| | |
|------------------------------|--|
| I/O diagnostics (per module) | Short circuit/overload of sensor supply Undervoltage ($U_{IS} + U_A$) |
|------------------------------|--|

Process image:


| | |
|--------------------|----------------------|
| Process data width | 1-byte data + status |
|--------------------|----------------------|

LED indicators:




| | |
|--------------------------------|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Input signal status | LED (yellow) |
| $U_{IS} + U_A$: Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 270 g |




1: RD+/TD+
2: RD-/TD-
3: TD-/RD-
4: TD+/RD+
5: GND
Housing: Shield



1: 24 V U_{IS}
2: 24 V U_A
3: 0 V U_{IS}
4: 0 V U_A

Block diagram of an input

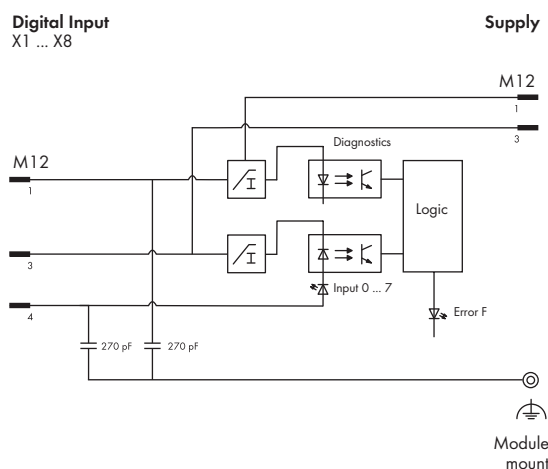

Technical Data

Input characteristic:

| Input voltage | Typical input current |
|-------------------------------------|-----------------------|
| -30 V DC < U _{IN} < 0 V DC | 0 |
| 5 V | 2.4 mA |
| 11 V | 6.4 mA |
| 24 V | 7.3 mA |
| 30 V | 7.4 mA |

System bus:

| | |
|---------------------|--|
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|---------------------|-----|
| Conformity marking | CE |
| Korea Certification | KCC |
| UL 508 | |

Technical Data

Isolation:

| | |
|---|---------------|
| Channel - Channel | no |
| U _{IS} , U _A , system bus | 500 V DC each |

Configurable functions:

| | |
|---------------------------------|---|
| Input filter (per channel) | 0.1 / 0.5 / 3 / 15 / 20 ms / filter off |
| Inversion (per channel) | On/off |
| Online simulation (per channel) | Lock/unlock; simulation value: 0/1 |
| Online simulation (per module) | Diagnostics |

I/O diagnostics:

| | |
|------------------------------|---|
| I/O diagnostics (per module) | Short circuit/overload of sensor supply Undervoltage (U _{IS} + U _A) |
|------------------------------|---|

Process image:

| | |
|--------------------|----------------------|
| Process data width | 1-byte data + status |
|--------------------|----------------------|

LED indicators:


| | |
|--|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Input signal status | LED (yellow) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 170 |
| Weight | 387 g |

Digital Input Module, 24 VDC, High Speed

8 inputs (4 x M12, two inputs per connector)

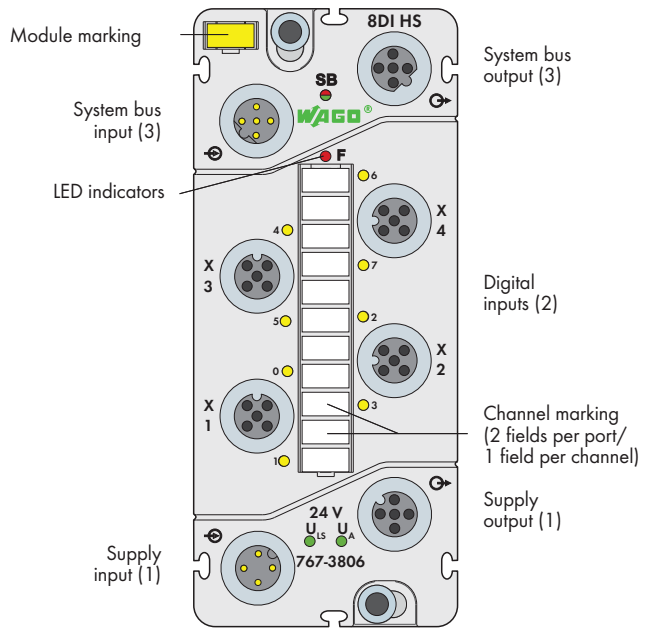

Short description:

This digital input module records binary signals from sensors with short response times. The 767-3806 Module features high-speed inputs, making it ideal for use with fast ETHERNET-based fieldbus systems (e.g., sercos).

Features:


- 8 digital inputs, 24 VDC
- Front-end cycle time (hardware) max. 6 μs
- Diagnostic-capable (module by module)
- Parametrizable (filter, inversion, online simulation and diagnostics)

Included:




- 1 x WMB marker, yellow
- 1 x marking strip
- 2 x M12 protective cap

| Description | Item No. | Pack. Unit |
|--|------------------------------------|------------|
| 8DI 24VDC HS (4xM12) | 767-3806 | 1 |
| Accessories | | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |

| Technical Data | |
|---|--|
| Module supply: | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity of supply connections | Max. 8 A (U_{IS} : 4 A, U_A : 4 A) |
| Supply voltage | |
| Logic and sensor voltage U_{IS} | 24 V DC (-25 % ... +30 %) |
| Actuator voltage U_A | 24 V DC (-25 % ... +30 %); Also required for power supply transmission |
| Supply current | |
| Logic and sensor current I_{IS} | typ. 45 mA + sensors (max. 1.0 A) |
| Actuator current I_A | 5 mA |
| Protection | Reverse voltage protection for $U_{IS} + U_A$; short circuit protection for sensor supply |
| Digital inputs: | |
| Number of inputs | 8 |
| Connection type (2) | M12 connectors, A coded, 5 poles, shielded |
| Wire connection | 2- or 3-wire |
| Front-end cycle time (hardware) | max. 6 μs |
| Front-end jitter/skew (input) | < 2 μs |
| Input characteristic | Type 3, acc. to IEC 61131-2 |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +11 V ... +30 V DC |
| Input wiring | high-side switching |
| Input voltage | 24 VDC (-3 VDC < U_{IN} < +30 VDC) |
| Input current (typ.) | 2.8 mA |
| Connection of 2-wire BEROs | max. 1.5 mA admissible closed current |
| Cable length, unshielded | ≤ 30 m |
| Wrong connection of inputs | No effect |




1: RD+/TD+
2: RD-/TD-
3: TD-/RD-
4: TD+/RD+
5: GND
Housing: Shield

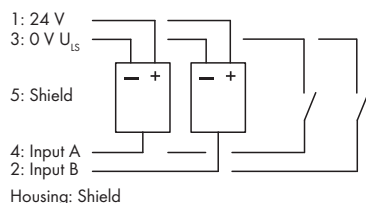

1: 24 V U_{IS}
2: 24 V U_A
3: 0 V U_{IS}
4: 0 V U_A

Block diagram of an input

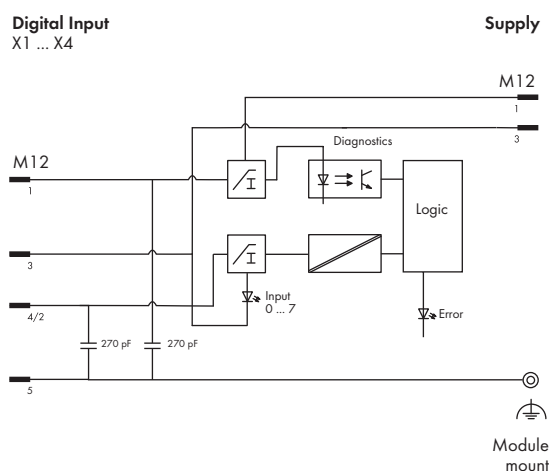

Technical Data

Input characteristic:

| Input voltage | Typical input current |
|---------------|-----------------------|
| 0 V | 0 mA |
| 5 V | 1.6 mA |
| 11 V | 2.7 mA |
| 24 V | 2.8 mA |
| 30 V | 2.8 mA |

System bus:

| | |
|---------------------|--|
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|--------------------|----|
| Conformity marking | CE |
| UL 508 | |

Technical Data

Isolation:

| | |
|-----------------------------|--------------|
| Channel - Channel | No |
| U_{IS} , U_A system bus | 500 VDC each |

Configurable functions:

| | |
|----------------------------|---|
| Input filter (per channel) | 10/ 25/ 50/ 100/ 200 μ s/ 1/ 3 ms/ filter off |
|----------------------------|---|

| | |
|---------------------------------|------------------------------------|
| Inversion (per channel) | On/off |
| Online simulation (per channel) | Lock/unlock, simulation value: 0/1 |
| Online simulation (per module) | Diagnostics |

I/O diagnostics:

| | |
|------------------------------|--|
| I/O diagnostics (per module) | Short circuit/overload of sensor supply Undervoltage (U_{IS} + U_A) |
|------------------------------|--|

Process image:




| | |
|--------------------|----------------------|
| Process data width | 1-byte data + status |
|--------------------|----------------------|

LED indicators:


| | |
|----------------------------------|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Input signal status | LED (yellow) |
| U_{IS} + U_A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 270 g |

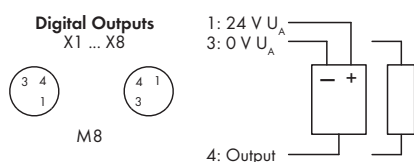

Block diagram of an output

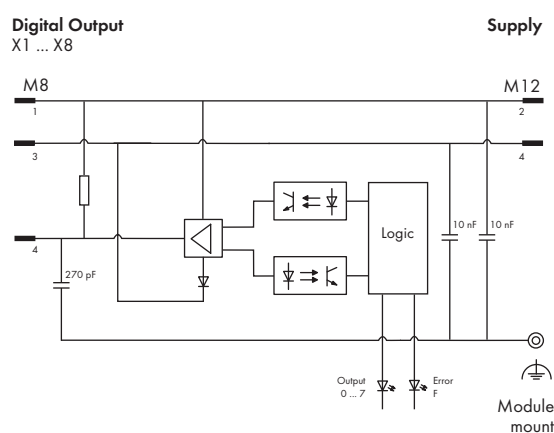

Technical Data

Information on actuator selection:

| | |
|--|---|
| Delay time hardware from "0" to "1" (0 - 90%) | Typ. 75 μ s (resistive load) |
| Delay time hardware from "1" to "0" (0 - 90%) | Typ. 270 μ s (resistive load) |
| Rise time from "0" to "1" | typ. 40 μ s (resistive load) |
| Fall time from "1" to "0" | Typ. 50 μ s (resistive load) |
| Cable length, unshielded | \leq 30 m |
| Protection against reverse voltages | \leq 0.5 A |
| Type of load | Inductive, resistive loads and lamps |
| Switching frequency | Inductive load approx. 20 Hz Resistive load approx. 500 Hz Lamp load approx. 500 Hz |
| Parallel connection of 2 outputs | for power boost for redundant actuation of a load |
| Type of protective circuit | External protection (e.g., recovery diodes) |
| Output resistance | $<$ 0.4 Ω |

Operating state influence on output:

| | |
|------------------------------------|-----------------------------------|
| PLC CPU stop | Acc. to substitute value strategy |
| Fieldbus disruption | Acc. to substitute value strategy |
| S-bus (system bus) disruption | 0 V status |
| Supply voltage under rated voltage | |
| tolerance | 0 V status |
| Interruption of supply voltage | 0 V status |
| Output operation | Non-latching |
| Overload behavior | Automatic restart |

System bus:

| | |
|---------------------|--|
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|---------------------|----|
| Conformity marking | CE |
| Korea Certification | |
| UL 508 | |

Technical Data

Isolation:

| | |
|---|---------------|
| Channel - Channel | No |
| U _{IS} , U _A system bus | 500 V DC each |

Configurable functions:

| | |
|---|---|
| Inversion (per channel) | On/off |
| Substitute value strategy (per channel) | Switch substitute value/hold last value |
| Substitute value (per channel) | 0/1 |
| Manual mode (per channel) | On/off |
| Manual mode value (per channel) | 0/1 |
| Online simulation (per channel) | Lock/unlock; simulation value: 0/1 |
| Online simulation (per channel/module) | Diagnostics |

I/O diagnostics:

| | |
|-------------------------------|---|
| I/O diagnostics (per channel) | Actuator short-circuit/overload Actuator wire break Overtemperature |
| I/O diagnostics (per module) | Undervoltage (U _{IS} + U _A) |

Process image:


| | |
|--------------------|----------------------|
| Process data width | 1-byte data + status |
|--------------------|----------------------|

LED indicators:


| | |
|--|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Output signal status | LED (yellow/red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications


| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 270 g |



Digital Outputs X1 ... X4
(two outputs/connector)

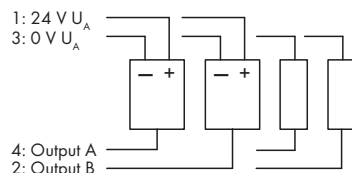


Supply



- 1: 24 V U_{IS}
2: 24 V U_A
3: 0 V U_{IS}
4: 0 V U_A

Block diagram of an output

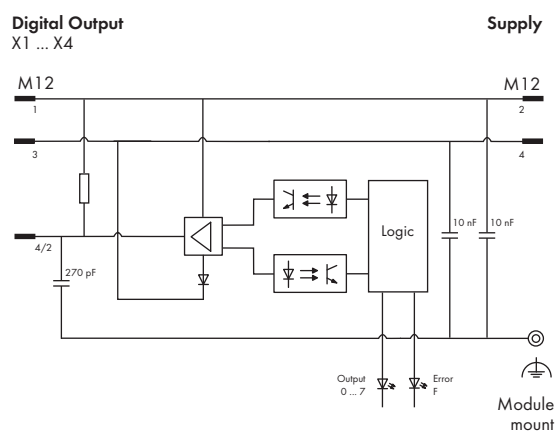

Technical Data

Information on actuator selection:

| | |
|--|---|
| Delay time hardware from "0" to "1" (0 - 90%) | Typ. 75 µs (resistive load) |
| Delay time hardware from "1" to "0" (0 - 90%) | Typ. 270 µs (resistive load) |
| Rise time from "0" to "1" | Typ. 40 µs (resistive load) |
| Fall time from "1" to "0" | Typ. 50 µs (resistive load) |
| Cable length, unshielded | ≤ 30 m |
| Protection against reverse voltages | ≤ 0.5 A |
| Type of load | Inductive, resistive loads and lamps |
| Switching frequency | Inductive load approx. 20 Hz Resistive load approx. 500 Hz Lamp load approx. 500 Hz |
| Parallel connection of 2 outputs | for power boost for redundant actuation of a load |
| Type of protective circuit | External protection (e.g., recovery diodes) |
| Output resistance | < 0.4 Ω |

Operating state influence on output:

| | |
|--|-----------------------------------|
| PLC CPU stop | Acc. to substitute value strategy |
| Fieldbus disruption | Acc. to substitute value strategy |
| S-bus (system bus) disruption | 0 V status |
| Supply voltage under rated voltage tolerance | 0 V status |
| Interruption of supply voltage | 0 V status |
| Output operation | Non-latching |
| Overload behavior | Automatic restart |

System bus:

| | |
|---------------------|--|
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|---------------------|--------|
| Conformity marking | CE |
| Korea Certification | KCC |
| UL 508 | UL 508 |

Technical Data

Isolation:

| | |
|---|---------------|
| Channel - Channel | No |
| U _{IS} , U _A system bus | 500 V DC each |

Configurable functions:

| | |
|---|---|
| Inversion (per channel) | On/off |
| Substitute value strategy (per channel) | Switch substitute value/hold last value |
| Substitute value (per channel) | 0/1 |
| Manual mode (per channel) | On/off |
| Manual mode value (per channel) | 0/1 |
| Online simulation (per channel) | Lock/unlock; simulation value: 0/1 |
| Online simulation (per channel/module) | Diagnostics |

I/O diagnostics:

| | |
|-------------------------------|---|
| I/O diagnostics (per channel) | Actuator short-circuit/overload Actuator wire break Overtemperature |
| I/O diagnostics (per module) | Undervoltage (U _{IS} + U _A) |

Process image:




| | |
|--------------------|----------------------|
| Process data width | 1-byte data + status |
|--------------------|----------------------|

LED indicators:


| | |
|--|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Output signal status | LED (yellow/red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 260 g |

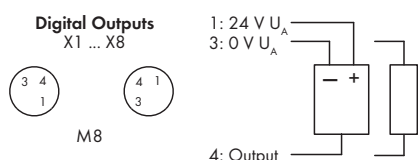

Block diagram of an output

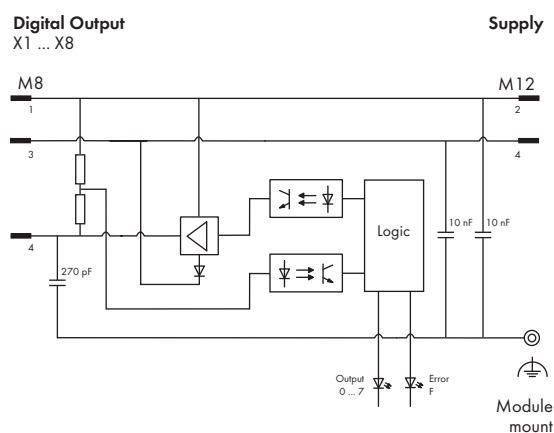

Technical Data

Information on actuator selection:

| | |
|--|---|
| Delay time hardware from "0" to "1" (0 - 90%) | Typ. 75 μs (resistive load) |
| Delay time hardware from "1" to "0" (0 - 90%) | Typ. 265 μs (resistive load) |
| Rise time from "0" to "1" | Typ. 30 μs (resistive load) |
| Fall time from "1" to "0" | Typ. 50 μs (resistive load) |
| Cable length, unshielded | ≤ 30 m |
| Protection against reverse voltages | ≤ 2 A |
| Type of load | Inductive, resistive loads and lamps |
| Switching frequency | Inductive load approx. 20 Hz Resistive load approx. 500 Hz Lamp load approx. 500 Hz |
| Parallel connection of 2 outputs | for power boost for redundant actuation of a load |
| Type of protective circuit | External protection (e.g., recovery diodes) required |
| Output resistance | max. 0.1 Ω |

Operating state influence on output:

| | |
|--|-----------------------------------|
| PLC CPU stop | Acc. to substitute value strategy |
| Fieldbus disruption | Acc. to substitute value strategy |
| S-bus (system bus) disruption | 0 V status |
| Supply voltage under rated voltage tolerance | 0 V status |
| Interruption of supply voltage | 0 V status |
| Output operation | Non-latching |
| Overload behavior | Automatic restart |

System bus:

| | |
|---------------------|--|
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|---------------------|--------|
| Conformity marking | CE |
| Korea Certification | K |
| UL 508 | UL 508 |

Technical Data

Isolation:

| | |
|---|---------------|
| Channel - Channel | No |
| U _{LS} , U _A system bus | 500 V DC each |

Configurable functions:

| | |
|---|---|
| Inversion (per channel) | On/off |
| Substitute value strategy (per channel) | Switch substitute value/hold last value |
| Substitute value (per channel) | 0/1 |
| Manual mode (per channel) | On/off |
| Manual mode value (per channel) | 0/1 |
| Online simulation (per channel) | Lock/unlock; simulation value: 0/1 |
| Online simulation (per channel/module) | Diagnostics |

I/O diagnostics:

| | |
|-------------------------------|---|
| I/O diagnostics (per channel) | Actuator short-circuit/overload Actuator wire break Overtemperature |
| I/O diagnostics (per module) | Undervoltage (U _{LS} + U _A) |

Process image:


| | |
|--------------------|----------------------|
| Process data width | 1-byte data + status |
|--------------------|----------------------|

LED indicators:



| | |
|--|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Output signal status | LED (yellow/red) |
| U _{LS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications


| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 277 g |




- 1: RD+/TD+
 - 2: RD-/TD-
 - 3: TD-/RD-
 - 4: TD+/RD+
 - 5: GND
- Housing: Shield

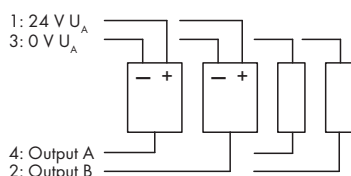

- 1: 24 V U_{IS}
- 2: 24 V U_A
- 3: 0 V U_{IS}
- 4: 0 V U_A



Block diagram of an output

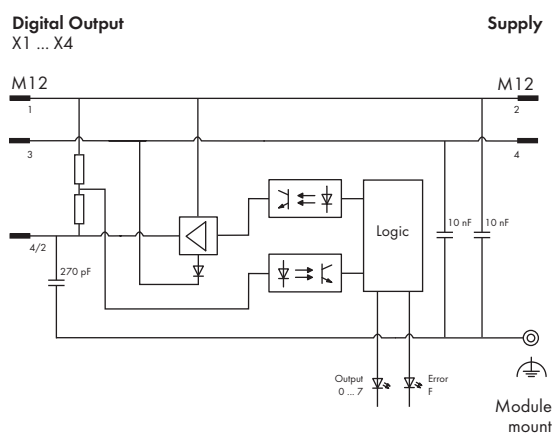

Technical Data

Information on actuator selection:

| | |
|--|---|
| Delay time hardware from "0" to "1" (0 - 90%) | Typ. 75 μs (resistive load) |
| Delay time hardware from "1" to "0" (0 - 90%) | Typ. 265 μs (resistive load) |
| Rise time from "0" to "1" | Typ. 30 μs (resistive load) |
| Fall time from "1" to "0" | Typ. 50 μs (resistive load) |
| Cable length, unshielded | ≤ 30 m |
| Protection against reverse voltages | ≤ 2 A |
| Type of load | Inductive, resistive loads and lamps |
| Switching frequency | Inductive load approx. 20 Hz Resistive load approx. 500 Hz Lamp load approx. 500 Hz |
| Parallel connection of 2 outputs | for power boost for redundant actuation of a load |
| Type of protective circuit | External protection (e.g., recovery diodes) required |
| Output resistance | max. 0.1 Ω |

Operating state influence on output:

| | |
|--|-----------------------------------|
| PLC CPU stop | Acc. to substitute value strategy |
| Fieldbus disruption | Acc. to substitute value strategy |
| S-bus (system bus) disruption | 0 V status |
| Supply voltage under rated voltage tolerance | 0 V status |
| Interruption of supply voltage | 0 V status |
| Output operation | Non-latching |
| Overload behavior | Automatic restart |

System bus:

| | |
|---------------------|--|
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|---------------------|--------|
| Conformity marking | CE |
| Korea Certification | KCC |
| UL 508 | UL 508 |

Technical Data

Isolation:

| | |
|---|---------------|
| Channel - Channel | No |
| U _{IS} , U _A system bus | 500 V DC each |

Configurable functions:

| | |
|---|---|
| Inversion (per channel) | On/off |
| Substitute value strategy (per channel) | Switch substitute value/hold last value |
| Substitute value (per channel) | 0/1 |
| Manual mode (per channel) | On/off |
| Manual mode value (per channel) | 0/1 |
| Online simulation (per channel) | Lock/unlock; simulation value: 0/1 |
| Online simulation (per channel/module) | Diagnostics |

I/O diagnostics:

| | |
|-------------------------------|---|
| I/O diagnostics (per channel) | Actuator short-circuit/overload Actuator wire break Overtemperature |
| I/O diagnostics (per module) | Undervoltage (U _{IS} + U _A) |

Process image:

| | |
|--------------------|----------------------|
| Process data width | 1-byte data + status |
|--------------------|----------------------|


LED indicators:

| | |
|--|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Output signal status | LED (yellow/red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 250 g |

6 Digital Output Module 24 V DC / 0.5 A
8 outputs (8 x M8), low-side switching

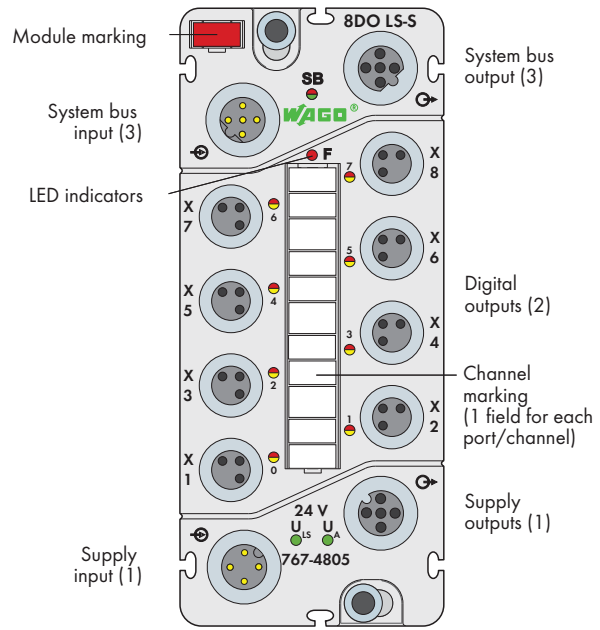

Short description:

Digital output module for actuator control (e.g., magnetic valves, DC contactors, indicators).

Features:

- 8 digital outputs, 24 V DC / 0.5 A, low-side switching
- Diagnostic capable (per channel)
- Parametrizable (inversion, substitute value strategy, manual mode, online simulation and diagnostics)

Included:


- 1 x WMB marker, red
- 1 x marking strip
- 2 x M8 protective cap

| Description | Item No. | Pack. Unit |
|--|------------------------------------|------------|
| 8DO 24V DC 0.5A LS SWITCH (8xM8) | 767-4805 | 1 |
| Accessories | | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |

| Technical Data | |
|---|--|
| Module supply: | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity of supply connections | Max. 8 A (U_{IS} : 4 A, U_A : 4 A) |
| Supply voltage | |
| Logic and sensor voltage U_{IS} | 24 V DC (-25 % ... +30 %) |
| Actuator voltage U_A | 24 V DC (-25 % ... +30 %) |
| Supply current | |
| Logic and sensor current I_{IS} | Typ. 40 mA (only logic part) |
| Actuator current I_A | Typ. 20 mA + actuators |
| Protection | Reverse voltage protection for U_{IS} + U_A |
| Digital outputs: | |
| No. of outputs | 8 |
| Connection type (2) | M8 connectors, 3 poles |
| Wire connection | 2- or 3-wire |
| Output voltage | $\geq 0V U_A$ |
| Output current (per channel) | 0.5 A (max. 0.6 A), short-circuit/overload protection (thermal shutdown) |
| Voltage drop against U_A at 500 mA | Max. 0.2 V DC ($0V U_A$) |
| Output current (module) | max. 4 A |
| Leakage current in OFF state | typ. 150 μ A |
| Output circuit | Low-side switching |

6 Digital Output Module 24 V DC / 0.5 A

470 8 outputs (4 x M12, two inputs per connector), low-side switching

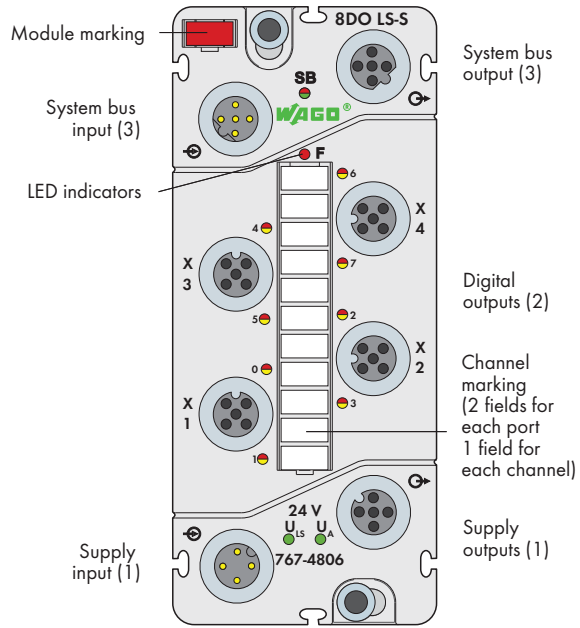

Short description:

Digital output module for actuator control (e.g., magnetic valves, DC contactors, indicators).

Features:




- 8 digital outputs, 24 V DC / 0.5 A, low-side switching
- Diagnostic capable (per channel)
- Parametrizable (inversion, substitute value strategy, manual mode, online simulation and diagnostics)

Included:


- 1 x WMB marker, red
- 1 x marking strip
- 2 x M12 protective cap

| Description | Item No. | Pack. Unit |
|--|------------------------------------|------------|
| 8DO 24V DC 0.5A (4xM12) | 767-4806 | 1 |
| Accessories | | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |

| Technical Data | |
|---|--|
| Module supply: | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity of supply connections | Max. 8 A (U_{IS} : 4 A, U_A : 4 A) |
| Supply voltage | |
| Logic and sensor voltage U_{IS} | 24 V DC (-25 % ... +30 %) |
| Actuator voltage U_A | 24 V DC (-25 % ... +30 %) |
| Supply current | |
| Logic and sensor current I_{IS} | Typ. 40 mA (only logic part) |
| Actuator current I_A | Typ. 20 mA + actuators |
| Protection | Reverse voltage protection for U_{IS} + U_A |
| Digital outputs: | |
| No. of outputs | 8 |
| Connection type (2) | M12 connectors, A coded, 4 poles |
| Wire connection | 2- or 3-wire |
| Output voltage | $\geq 0V U_A$ |
| Output current (per channel) | 0.5 A (max. 0.6 A), short-circuit/overload protection (thermal shutdown) |
| Voltage drop against U_A at 500 mA | Max. 0.2 V DC ($0V U_A$) |
| Output current (module) | max. 4 A |
| Leakage current in OFF state | typ. 150 μ A |
| Output circuit | Low-side switching |




1: RD+/TD+
2: RD-/TD-
3: TD-/RD-
4: TD+/RD+
5: GND
Housing: Shield

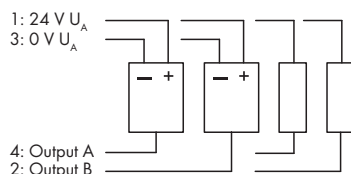





1: 24 V U_{IS}
2: 24 V U_A
3: 0 V U_{IS}
4: 0 V U_A

Block diagram of an output

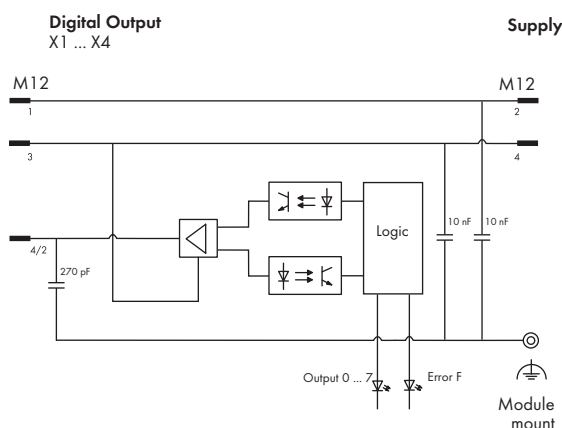


| Technical Data | |
|---|---|
| Information on actuator selection: | |
| Delay time hardware from "0" to "1" (0 - 90%) | Typ. 75 μs (resistive load) |
| Delay time hardware from "1" to "0" (0 - 90%) | Typ. 270 μs (resistive load) |
| Rise time from "0" to "1" | Typ. 150 μs (resistive load) |
| Fall time from "1" to "0" | Typ. 150 μs (resistive load) |
| Cable length, unshielded | ≤ 30 m |
| Protection against reverse voltages | ≤ 0.5 A |
| Type of load | Inductive, resistive loads and lamps |
| Switching frequency | Inductive load approx. 20 Hz Resistive load approx. 500 Hz Lamp load approx. 500 Hz |
| Parallel connection of 2 outputs | For power boost For redundant load actuation |
| Type of protective circuit | External protection (e.g., recovery diodes) |
| Output resistance | < 0.4 Ω |
| Operating state influence on output: | |
| PLC CPU stop | Acc. to substitute value strategy |
| Fieldbus disruption | Acc. to substitute value strategy |
| S-bus (system bus) disruption | 0 V status |
| Supply voltage under rated voltage tolerance | 0 V status |
| Interruption of supply voltage | 0 V status |
| Output operation | Non-latching |
| Overload behavior | Automatic restart |
| System bus: | |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
| Standards and approvals: | |
| Conformity marking | CE |
| Korea Certification | KCC |
| UL 508 | UL 508 |

| Technical Data | |
|--|--|
| Isolation: | |
| Channel - Channel | No |
| U _{IS} , U _A system bus | 500 V DC each |
| Configurable functions: | |
| Inversion (per channel) | On/off |
| Substitute value strategy (per channel) | Switch substitute value / hold last value |
| Substitute value (per channel) | 0/1 |
| Manual mode (per channel) | On/off |
| Manual mode value (per channel) | 0/1 |
| Online simulation (per channel) | Lock/unlock; simulation value: 0/1 |
| Online simulation (per channel/module) | Diagnostics |
| I/O diagnostics: | |
| I/O diagnostics (per channel) | Overtemperature |
| I/O diagnostics (per module) | Undervoltage (U _{IS} + U _A) |
| Process image: | |
| Process data width | 1-byte data + status |
| LED indicators: | |
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Output signal status | LED (yellow/red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |
| General Specifications | |
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 270 g |



Block diagram of an output

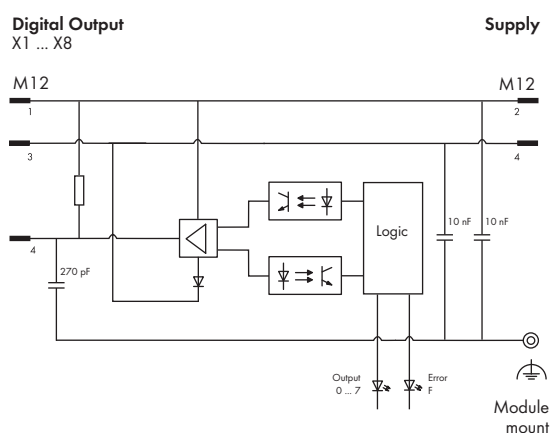**Technical Data****Information on actuator selection:**

| | |
|-------------------------------------|---|
| Delay time hardware from "0" to "1" | |
| (0 - 90%) | typ. 65 µs (resistive load) |
| Delay time hardware from "1" to "0" | |
| (0 - 90%) | typ. 190 µs (resistive load) |
| Rise time from "0" to "1" | typ. 40 µs (resistive load) |
| Fall time from "1" to "0" | typ. 50 µs (resistive load) |
| Cable length, unshielded | ≤ 30 m |
| Protection against reverse voltages | ≤ 0.5 A |
| Type of load | Inductive, resistive loads and lamps |
| Switching frequency | Inductive load approx. 20 Hz Resistive load approx. 500 Hz Lamp load approx. 500 Hz |
| Parallel connection of 2 outputs | for power boost for redundant actuation of a load |
| Type of protective circuit | External protection (e.g., recovery diodes) |
| Output resistance | < 0.4 Ω |

Operating state influence on output:

| | |
|------------------------------------|-----------------------------------|
| PLC CPU stop | Acc. to substitute value strategy |
| Fieldbus disruption | Acc. to substitute value strategy |
| S-bus (system bus) disruption | 0 V status |
| Supply voltage under rated voltage | |
| tolerance | 0 V status |
| Interruption of supply voltage | 0 V status |
| Output operation | Non-latching |
| Overload behavior | Automatic restart |

System bus:

| | |
|---------------------|--|
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|---------------------|----|
| Conformity marking | CE |
| Korea Certification | |
| UL 508 | |

Technical Data**Isolation:**

| | |
|---|---------------|
| Channel - Channel | no |
| U _{IS} , U _A system bus | 500 V DC each |

Configurable functions:

| | |
|---|---|
| Inversion (per channel) | On/off |
| Substitute value strategy (per channel) | Switch substitute value/hold last value |
| Substitute value (per channel) | 0/1 |
| Manual mode (per channel) | On/off |
| Manual mode value (per channel) | 0/1 |
| Online simulation (per channel) | Lock/unlock; simulation value: 0/1 |
| Online simulation (per channel/module) | Diagnostics |

I/O diagnostics:

| | |
|-------------------------------|---|
| I/O diagnostics (per channel) | Actuator short-circuit/overload Actuator wire break Overtemperature |
| I/O diagnostics (per module) | Undervoltage (U _{IS} + U _A) |

Process image:


| | |
|--------------------|----------------------|
| Process data width | 1-byte data + status |
|--------------------|----------------------|

LED indicators:


| | |
|--|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Output signal status | LED (yellow/red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications


| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 170 |
| Weight | 385 g |



Digital Outputs X1 ... X4
(two outputs/connector)



Block diagram of an output

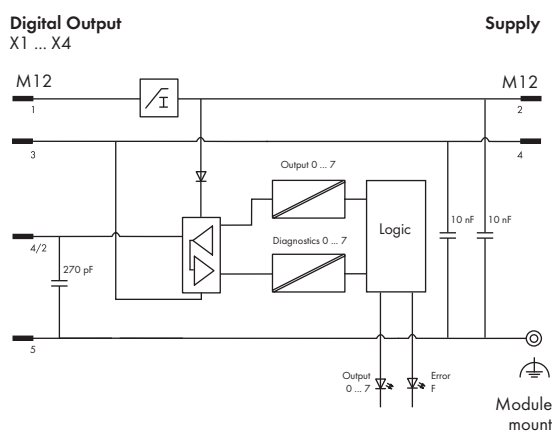


| Technical Data | |
|---|--|
| Information on actuator selection: | |
| Front-end cycle time 90% (hardware) | max. 0,5 µs |
| Edge steepness | T _{ON/OFF} typ. < 0,2 µs |
| Front-end jitter/skew (output) | < 0,2 µs |
| Protection against reverse voltages | ≤ 0,5 A |
| Type of load | Inductive, resistive loads and lamps |
| Switching frequency | Inductive load upon request Resistive load upon request Lamp load upon request |
| Type of protective circuit | External protection (e.g., recovery diodes) |
| Operating state influence on output: | |
| PLC CPU stop | Acc. to substitute value strategy |
| Fieldbus disruption | Acc. to substitute value strategy |
| S-bus (system bus) disruption | 0 V status |
| Supply voltage under rated voltage | 0 V status |
| tolerance | 0 V status |
| Interruption of supply voltage | 0 V status |
| Output operation | Non-latching |
| Overload behavior | Automatic restart |
| System bus: | |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
| Standards and approvals: | |
| Conformity marking | CE |
| UL 508 | |

| Technical Data | |
|--|--|
| Isolation: | |
| Channel - Channel | No |
| U _{LS} , U _A system bus | 500 VDC each |
| Configurable functions: | |
| Inversion (per channel) | On/off |
| Substitute value strategy (per channel) | Switch substitute value/hold last value |
| Substitute value (per channel) | 0/1 |
| Manual mode (per channel) | On/off |
| Manual mode value (per channel) | 0/1 |
| Online simulation (per channel) | Lock/Unlock; simulation value: 0/1; diagnostics |
| I/O diagnostics: | |
| I/O diagnostics (per channel) | Overtemperature, actuators |
| I/O diagnostics (per module) | Undervoltage (U _{LS} + U _A) |
| Process image: | |
| Process data width | 1-byte data + status |
| LED indicators: | |
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Output signal status | LED (yellow/red) |
| U _{LS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |
| General Specifications | |
| Dimensions (mm) W x H x L | 50 x 35,7 x 117 |
| Weight | 270 g |

Digital Input/Output Module 24 V DC / 0.5 A

8 inputs/outputs (8 x M8)

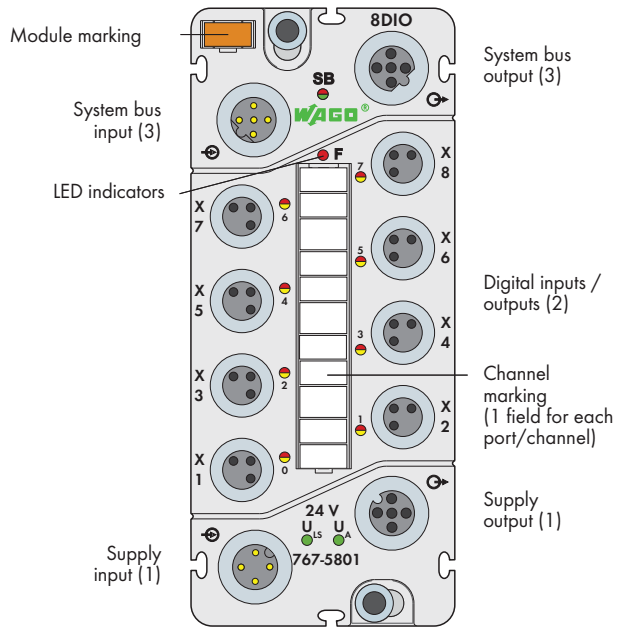

Short description:

This digital input/output module records binary signals from switches, sensors and proximity switches (BEROs)*. The module also controls actuators, such as magnetic valves, DC contactors and indicators.

* Does not apply to 767-5801/000-800

Features:


- 8 digital inputs/outputs, 24 VDC / 0.5 A
- Input/output, parametrizable (channel by channel)
- Diagnostic-capable (channel by channel/module by module)
- Parametrizable (operating mode, incl. counter, filter, inversion, substitute value strategy, substitute value, manual mode, online simulation and diagnostics)

Included:

- 1 x WMB marker, orange
- 1 x marking strip
- 2 x M8 protective cap

| Description | Item No. | Pack. Unit |
|--|---|------------|
| 8DIO 24V DC 0.5A (8xM8) | 767-5801 | 1 |
| 8DIO 24V DC 0.5A IF (8xM8)** | 767-5801/000-800 | 1 |
| ** Interference-free for safety function applications (see manual) | | |
| Accessories | Item No. | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |
| Technical Data | | |
| Module supply: | | |
| Connection type (1) | M12 connectors, A coded, 4 poles; | |
| | Derating must be observed | |
| Current carrying capacity of supply connections | max. 8 A (U _{IS} : 4 A, U _A : 4 A) | |
| Supply voltage | | |
| Logic and sensor voltage U _{IS} | 24 V DC (-25 % ... +30 %) | |
| Actuator voltage U _A | 24 V DC (-25 % ...+30 %) | |
| Supply current | | |
| Logic and sensor current I _S | typ. 45 mA (only logic part) | |
| Actuator current I _A | typ. 75 mA + sensors/actuators (max. 800 mA) + load | |
| Protection | Reverse voltage protection for U _{IS} + U _A | |
| | Short-circuit protection for sensor/actuator supply | |



| Technical Data | |
|------------------------------|---|
| Digital inputs: | |
| Number of inputs | 8 |
| Connection type (2) | M8 connectors, 3 poles |
| Wire connection | 2- or 3-wire |
| Input filter | Hardware: ≤ 110 µs Software: parametrizable |
| Input characteristic | Type 2, acc. to IEC 61131-2 (767-5801) Type 1, acc. to IEC 61131-2 (767-5801/000-800) |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +11 ... +30 V DC (767-5801) +15 V ... +30 V DC (767-5801/000-800) |
| Input wiring | High-side switching |
| Input voltage | 24 VDC (-3 VDC < U _{IN} < +30 VDC); Power from U _A is strongly recommended, recovery for voltages > U _A |
| Input current (typ.) | 7.0 mA (767-5801) 3.0 mA (767-5801/000-800) |
| Connection of 2-wire BEROs | max. 1.5 mA admissible closed current |
| Cable length, unshielded | ≤ 30 m |
| Input characteristic: | |
| Input voltage | Typical input current |
| 0 V DC | 0 |
| 5 V | 2.7 mA (767-5801) 0.6 mA (767-5801/000-800) |
| 11 V | 6.8 mA (767-5801) |
| 15 V | 2.6 mA (767-5801/000-800) |
| 24 V | 7.0 mA (767-5801) 3.0 mA (767-5801/000-800) |
| 30 V | 7.1 mA (767-5801) 3.2 mA (767-5801/000-800) |



Digital Inputs/Outputs
X1 ... X8




- 1: 24 V
3: 0 V U_A



- 1: 24 V U_{IS}
2: 24 V U_A
3: 0 V U_{IS}
4: 0 V U_A

Block diagram of an input/output

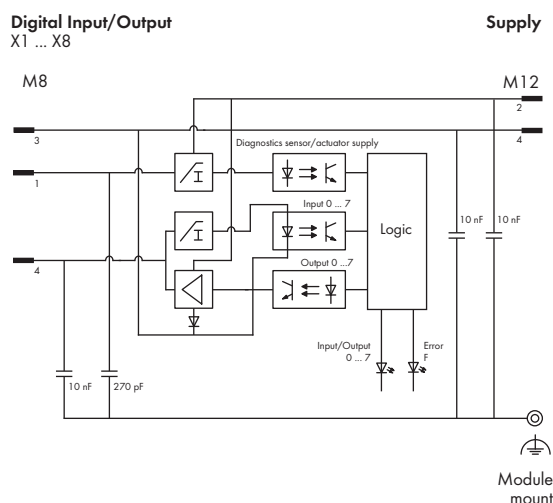


| Technical Data | |
|---|---|
| Digital outputs: | |
| No. of outputs | 8 |
| Connection type (2) | M8 connectors, 3 poles |
| Wire connection | 2- or 3-wire |
| Output voltage | ≤ U _A |
| Output current (per channel) | 0.5 A (max. 0.6 A), short-circuit/overload proof (thermal disconnection) |
| Voltage drop against U _A at 500 mA | max. 0.2 V DC |
| Output current (module) | max. 4 A |
| Leakage current in OFF state | typ. 5 μA |
| Output circuit | High-side switching |
| Information on actuator selection: | |
| Delay time hardware from "0" to "1" (0 - 90%) | typ. 90 μs (resistive load) |
| Delay time hardware from "1" to "0" (0 - 90%) | typ. 310 μs (resistive load) |
| Rise time from "0" to "1" | typ. 60 μs (resistive load) |
| Fall time from "1" to "0" | typ. 45 μs (resistive load) |
| Cable length, unshielded | ≤ 30 m |
| Reverse current (in case of recovery for voltages > U _A) | ≤ 0,5 A (error: 1 channel) |
| Type of load | Inductive, resistive loads and lamps |
| Switching frequency | Inductive load approx. 20 Hz Resistive load approx. 500 Hz Lamp load approx. 500 Hz |
| Parallel connection of 2 outputs | for power boost for redundant actuation of a load |
| Type of protective circuit | External protection (e.g., recovery diodes) |
| Output resistance | < 0.4 Ω |
| Operating state influence on output: | |
| PLC CPU stop | Acc. to substitute value strategy |
| Fieldbus disruption | Acc. to substitute value strategy |
| S-bus (system bus) disruption | 0 V status |
| Supply voltage under rated voltage tolerance | 0 V status |
| Interruption of supply voltage | 0 V status |
| Output operation | Non-latching |
| Overload behavior | Automatic restart |

| Technical Data | |
|--|---|
| Counters: | |
| No. of counters | 2 |
| Counter type | Event/Gate time counter, pulse duration |
| Counting/switching frequency | 0 Hz ... 1 kHz |
| System bus: | |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
| Standards and approvals: | |
| Conformity marking | CE |
| Korea Certification | KCC |
| UL 508 | UL 508 |
| Isolation: | |
| Channel - Channel | no |
| U _{IS} , U _A , system bus | 500 V DC each |
| Configurable functions: | |
| Operating mode (per module) | DO-Module/DI-Module/DIO-Module/ DIO + 1 counter/DIO + 2 counters |
| Input filter (per channel) | 0.1/ 0.5/ 3 / 15 / 20 ms/ filter off |
| Inversion (per channel) | On/off |
| Substitute value strategy (per channel) | Switch substitute value/hold last value |
| Substitute value (per channel) | 0/1 |
| Manual mode (per channel) | On/off |
| Manual mode value (per channel) | 0/1 |
| Online simulation (per channel) | Lock/unlock; simulation value: 0/1 |
| Online simulation (per channel/module) | Diagnostics |
| I/O diagnostics: | |
| I/O diagnostics (per channel) | Overtemperature |
| I/O diagnostics (per module) | Sensor/Actuator supply short-circuit/ overload; Undervoltage (U _{IS} + U _A) |
| Process image: | |
| Process data width | Depends on operating mode |
| LED indicators: | |
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Input and output signal status | LED (yellow) |
| 0 ... 7: Output diagnostics | LED (red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |
| General Specifications | |
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 260 g |

Digital Input/Output Module 24 V DC / 0.5 A

8 inputs/outputs (4 x M12, two inputs/outputs per connector)

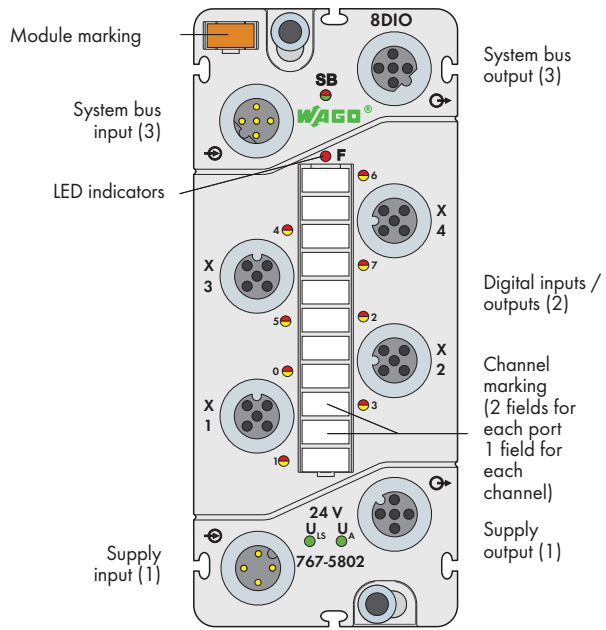

Short description:

This digital input/output module records binary signals from switches, sensors and proximity switches (BEROs)*. The module also controls actuators, such as magnetic valves, DC contactors and indicators.

* Does not apply to 767-5802/000-800

Features:

- 8 digital inputs/outputs, 24 VDC / 0.5 A
- Input/output, parametrizable (channel by channel)
- Diagnostic-capable (channel by channel/module by module)
- Parametrizable (operating mode, incl. counter, filter, inversion, substitute value strategy, substitute value, manual mode, online simulation and diagnostics)

Included:





- 1 x WMB marker, orange
- 1 x marking strip
- 2 x M12 protective cap

| Description | Item No. | Pack. Unit |
|--|------------------|------------|
| 8DIO 24V DC 0.5A (4xM12) | 767-5802 | 1 |
| 8DIO 24V DC 0.5A IF (4xM12)** | 767-5802/000-800 | 1 |
| ** Interference-free for safety function applications (see manual) | | |


| Accessories | Item No. |
|--|------------------------------------|
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 |

| Technical Data | |
|---|--|
| Module supply: | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity of supply connections | max. 8 A (U _{IS} : 4 A, U _A : 4 A) |
| Supply voltage | |
| Logic and sensor voltage U _{IS} | 24 V DC (-25 % ...+30 %) |
| Actuator voltage U _A | 24 V DC (-25 % ...+30 %) |
| Supply current | |
| Logic and sensor current I _{IS} | typ. 45 mA (only logic part) |
| Actuator current I _A | typ. 75 mA + sensors/actuators (max. 800 mA) + load |
| Protection | Reverse voltage protection for U _{IS} + U _A Short-circuit protection for sensor/actuator supply |

| Technical Data | |
|------------------------------|--|
| Digital inputs: | |
| Number of inputs | 8 |
| Connection type (2) | M12 connectors, A coded, 4 poles |
| Wire connection | 2- or 3-wire |
| Input filter | Hardware: ≤ 110 μs Software: parametrizable |
| Input characteristic | Type 2, acc. to IEC 61131-2 (767-5802) Type 1, acc. to IEC 61131-2 (767-5802/000-800) |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +11 ... +30 V DC (767-5802) +15 V ... +30 V DC (767-5802/000-800) |
| Input wiring | High-side switching |
| Input voltage | 24 VDC (-3 VDC < U _{IN} < +30 VDC); Power from U _A is strongly recommended, recovery for voltages > U _A |
| Input current (typ.) | 7.0 mA (767-5802) 3.0 mA (767-5802/000-800) |
| Connection of 2-wire BEROs | max. 1.5 mA admissible closed current |
| Cable length, unshielded | ≤ 30 m |
| Input characteristic: | |
| Input voltage | Typical input current |
| 0 V DC | 0 |
| 5 V | 2.7 mA (767-5802) 0.6 mA (767-5802/000-800) |
| 11 V | 6.8 mA (767-5802) |
| 15 V | 2.6 mA (767-5802/000-800) |
| 24 V | 7.0 mA (767-5802) 3.0 mA (767-5802/000-800) |
| 30 V | 7.1 mA (767-5802) 3.2 mA (767-5802/000-800) |

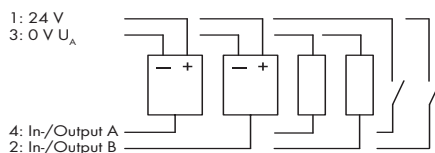

Block diagram of an input/output

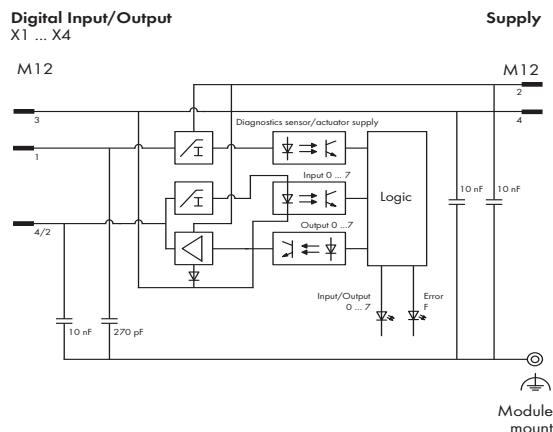


| Technical Data | |
|--|---|
| Digital outputs: | |
| No. of outputs | 8 |
| Connection type (2) | M12 connectors, A coded, 4 poles |
| Wire connection | 2- or 3-wire |
| Output voltage | ≤ U _A |
| Output current (per channel) | 0.5 A (max. 0.6 A), short-circuit/overload proof (thermal disconnection) |
| Voltage drop against U _A at 500 mA | max. 0.2 V DC |
| Output current (module) | max. 4 A |
| Leakage current in OFF state | typ. 5 μA |
| Output circuit | High-side switching |
| Information on actuator selection: | |
| Delay time hardware from "0" to "1" (0 - 90%) | typ. 90 μs (resistive load) |
| Delay time hardware from "1" to "0" (0 - 90%) | typ. 310 μs (resistive load) |
| Rise time from "0" to "1" | typ. 60 μs (resistive load) |
| Fall time from "1" to "0" | typ. 45 μs (resistive load) |
| Cable length, unshielded | ≤ 30 m |
| Reverse current (in case of recovery for voltages > U _A) | ≤ 0,5 A (error: 1 channel) |
| Type of load | Inductive, resistive loads and lamps |
| Switching frequency | Inductive load approx. 20 Hz Resistive load approx. 500 Hz Lamp load approx. 500 Hz |
| Parallel connection of 2 outputs | for power boost for redundant actuation of a load |
| Type of protective circuit | External protection (e.g., recovery diodes) |
| Output resistance | < 0.4 Ω |
| Operating state influence on output: | |
| PLC CPU stop | Acc. to substitute value strategy |
| Fieldbus disruption | Acc. to substitute value strategy |
| S-bus (system bus) disruption | 0 V status |
| Supply voltage under rated voltage tolerance | 0 V status |
| Interruption of supply voltage | 0 V status |
| Output operation | Non-latching |
| Overload behavior | Automatic restart |

| Technical Data | |
|--|---|
| Counters: | |
| No. of counters | 2 |
| Counter type | Event/Gate time counter, pulse duration |
| Counting/switching frequency | 0 Hz ... 1 kHz |
| System bus: | |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
| Standards and approvals: | |
| Conformity marking | CE |
| Korea Certification | KCC |
| UL 508 | UL 508 |
| Isolation: | |
| Channel - Channel | no |
| U _{IS} , U _A , system bus | 500 V DC each |
| Configurable functions: | |
| Operating mode (per module) | DO-Module/DI-Module/DIO-Module/ DIO + 1 counter/DIO + 2 counters |
| Input filter (per channel) | 0.1/ 0.5/ 3 / 15 / 20 ms/ filter off |
| Inversion (per channel) | On/off |
| Substitute value strategy (per channel) | Switch substitute value/hold last value |
| Substitute value (per channel) | 0/1 |
| Manual mode (per channel) | On/off |
| Manual mode value (per channel) | 0/1 |
| Online simulation (per channel) | Lock/unlock; simulation value: 0/1 |
| Online simulation (per channel/module) | Diagnostics |
| I/O diagnostics: | |
| I/O diagnostics (per channel) | Overtemperature |
| I/O diagnostics (per module) | Sensor/Actuator supply short-circuit/ overload; Undervoltage (U _{IS} + U _A) |
| Process image: | |
| Process data width | Depends on operating mode |
| LED indicators: | |
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Input and output signal status | LED (yellow) |
| 0 ... 7: Output diagnostics | LED (red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |
| General Specifications | |
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 255 g |

Digital Input/Output Module 24 V DC / 0.5 A

8 inputs/outputs (8 x M12)

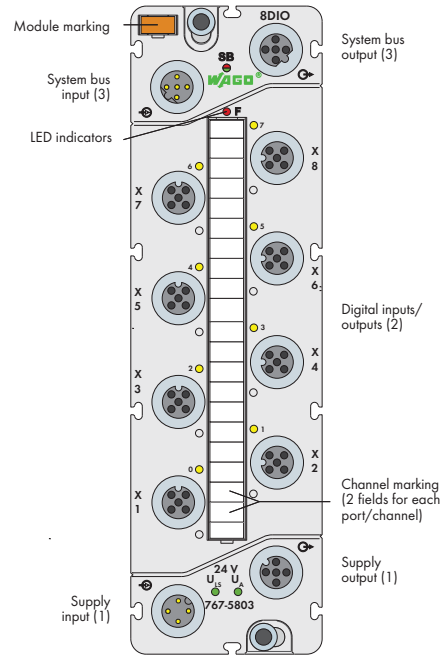

Short description:

This digital input/output module records binary signals from switches, sensors and proximity switches (BEROs)*. The module also controls actuators, such as magnetic valves, DC contactors and indicators.

* Does not apply to 767-5803/000-800

Features:




- 8 digital inputs/outputs, 24 VDC / 0.5 A
- Input/output, parametrizable (channel by channel)
- Diagnostic-capable (channel by channel/module by module)
- Parametrizable (operating mode, incl. counter, filter, inversion, substitute value strategy, substitute value, manual mode, online simulation and diagnostics)

Included:


- 1 x WMB marker, orange
- 1 x marking strip
- 2 x M12 protective cap

| Description | Item No. | Pack. Unit |
|--|---|------------|
| 8DIO 24V DC 0.5A (8xM12) | 767-5803 | 1 |
| 8DIO 24V DC 0.5A IF (8xM12)** | 767-5803/000-800 | 1 |
| ** Interference-free for safety function applications (see manual) | | |
| Accessories | Item No. | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |
| Technical Data | | |
| Module supply: | | |
| Connection type (1) | M12 connectors, A coded, 4 poles; | |
| | Derating must be observed | |
| Current carrying capacity of supply connections | max. 8 A (U _{IS} : 4 A, U _A : 4 A) | |
| Supply voltage | | |
| Logic and sensor voltage U _{IS} | 24 V DC (-25 % ... +30 %) | |
| Actuator voltage U _A | 24 V DC (-25 % ... +30 %) | |
| Supply current | | |
| Logic and sensor current I _{IS} | typ. 45 mA (only logic part) | |
| Actuator current I _A | typ. 75 mA + sensors/actuators (max. 800 mA) + load | |
| Protection | Reverse voltage protection for U _{IS} + U _A | |
| | Short-circuit protection for sensor/actuator supply | |

| Technical Data | |
|------------------------------|--|
| Digital inputs: | |
| Number of inputs | 8 |
| Connection type (2) | M12 connectors, A coded, 4 poles |
| Wire connection | 2- or 3-wire |
| Input filter | Hardware: ≤ 60 μs Software: parametrizable |
| Input characteristic | Type 2, acc. to IEC 61131-2 (767-5803) Type 1, acc. to IEC 61131-2 (767-5803/000-800) |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +11 V ... +30 V DC (767-5803) +15 ... +30 VDC (767-5803/000-800) |
| Input wiring | High-side switching |
| Input voltage | 24 VDC (-3 VDC < U _{IN} < +30 VDC); Power from U _A is strongly recommended, recovery for voltages > U _A |
| Input current (typ.) | 7.0 mA (767-5803) 3.0 mA (767-5803/000-800) |
| Connection of 2-wire BEROs | max. 1.5 mA admissible closed current |
| Cable length, unshielded | ≤ 30 m |
| Input characteristic: | |
| Input voltage | Typical input current |
| 0 V DC | 0 |
| 5 V | 2.7 mA (767-5803) 0.6 mA (767-5803/000-800) |
| 11 V | 6.8 mA (767-5803) |
| 15 V | 2.6 mA (767-5803/000-800) |
| 24 V | 7.0 mA (767-5803) 3.0 mA (767-5803/000-800) |
| 30 V | 7.1 mA (767-5803) 3.2 mA (767-5803/000-800) |

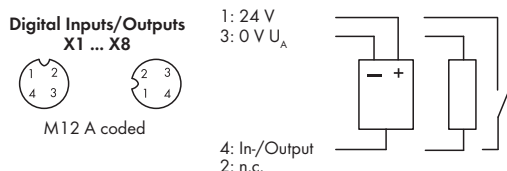

Block diagram of an input/output

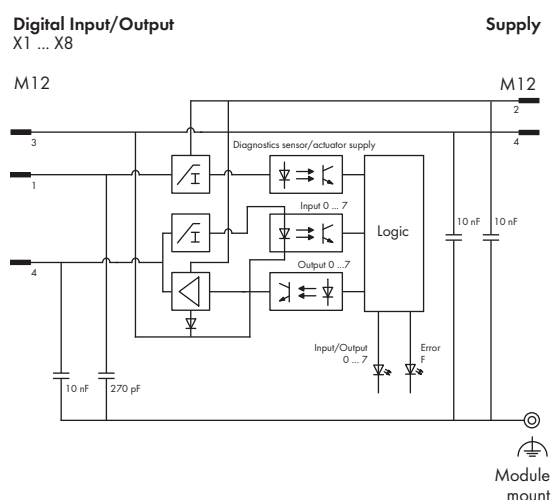

Technical Data

Digital outputs:

| | |
|--------------------------------------|--|
| No. of outputs | 8 |
| Connection type (2) | M12 connectors, A coded, 4 poles |
| Wire connection | 2- or 3-wire |
| Output voltage | $\leq U_A$ |
| Output current (per channel) | 0.5 A (max. 0.6 A), short-circuit/overload proof (thermal disconnection) |
| Voltage drop against U_A at 500 mA | max. 0.2 V DC |
| Output current (module) | max. 4 A |
| Leakage current in OFF state | typ. 5 μ A |
| Output circuit | High-side switching |

Information on actuator selection:

| | |
|--|---|
| Delay time hardware from "0" to "1" (0 - 90%) | typ. 70 μ s (resistive load) |
| Delay time hardware from "1" to "0" (0 - 90%) | typ. 180 μ s (resistive load) |
| Rise time from "0" to "1" | typ. 40 μ s (resistive load) |
| Fall time from "1" to "0" | typ. 40 μ s (resistive load) |
| Cable length, unshielded | \leq 30 m |
| Reverse current (in case of recovery for voltages $> U_A$) | \leq 0,5 A (error: 1 channel) |
| Type of load | Inductive, resistive loads and lamps |
| Switching frequency | Inductive load approx. 20 Hz Resistive load approx. 500 Hz Lamp load approx. 500 Hz |
| Parallel connection of 2 outputs | for power boost for redundant actuation of a load |
| Type of protective circuit | External protection (e.g., recovery diodes) |
| Output resistance | $<$ 0.4 Ω |

Operating state influence on output:

| | |
|---|-----------------------------------|
| PLC CPU stop | Acc. to substitute value strategy |
| Fieldbus disruption | Acc. to substitute value strategy |
| S-bus (system bus) disruption | 0 V status |
| Supply voltage under rated voltage tolerance | 0 V status |
| Interruption of supply voltage | 0 V status |
| Output operation | Non-latching |
| Overload behavior | Automatic restart |

Technical Data

Counters:

| | |
|------------------------------|---|
| No. of counters | 2 |
| Counter type | Event/gate time counter, pulse duration |
| Counting/switching frequency | 0 Hz ... 1 kHz |

System bus:

| | |
|---------------------|--|
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|---------------------|----|
| Conformity marking | CE |
| Korea Certification | |
| UL 508 | |

Isolation:

| | |
|-----------------------------|---------------|
| Channel - Channel | no |
| U_{IS} , U_A system bus | 500 V DC each |

Configurable functions:

| | |
|---|---|
| Operating mode (per module) | DO-Module/DI-Module/DIO-Module/ DIO + 1 counter/DIO + 2 counters |
| Counter | Count direction, start/limit value switching output, gate time |
| Input filter (per channel) | 0.1/ 0.5/ 3 /15 /20 ms/ filter off |
| Inversion (per channel) | On/off |
| Substitute value strategy (per channel) | Switch substitute value/hold last value |
| Substitute value (per channel) | 0/1 |
| Manual mode (per channel) | On/off |
| Manual mode value (per channel) | 0/1 |
| Online simulation (per channel) | Lock/unlock; simulation value: 0/1 |
| Online simulation (per channel/module) | Diagnostics |

I/O diagnostics:

| | |
|-------------------------------|--|
| I/O diagnostics (per channel) | Overtemperature |
| I/O diagnostics (per module) | Sensor/Actuator supply short-circuit/ overload; Undervoltage (U_{IS} + U_A) |

Process image:

| | |
|--------------------|---------------------------|
| Process data width | Depends on operating mode |
|--------------------|---------------------------|

LED indicators:


| | |
|---|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 ... 7: Input and output signal status | LED (yellow/red) |
| U_{IS} + U_A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 170 |
| Weight | 389 g |

Digital Input/Output Module, 24 VDC / 0.2 A, High Speed

4 inputs/outputs (4 x M12)

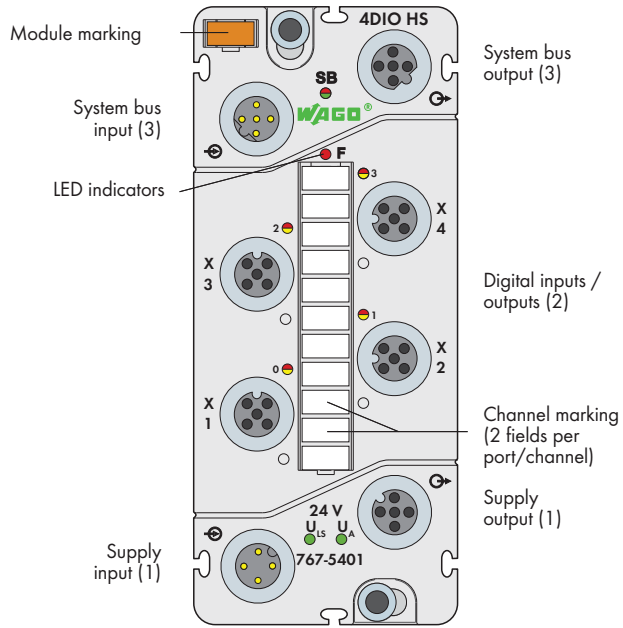

Short description:

This digital input/output module records/outputs binary signals from sensors/actuators with short response times. The 767-5401 Module features high-speed inputs/outputs, making it ideal for use with fast ETHERNET-based fieldbus systems (e.g., sercos).

Features:


- 4 digital inputs/outputs, 24 VDC / 0.2 A, incl. counter function
- Front-end cycle time (hardware) max. 3 μ s
- Diagnostic-capable (channel by channel/module by module)
- Parametrizable (operating mode, filter, inversion, substitute value strategy, substitute value, manual mode, online simulation and diagnostics)

Included:

- 1 x WMB marker, orange
- 1 x marking strip
- 2 x M12 protective cap

| Description | Item No. | Pack. Unit |
|--|--|------------|
| 4DIO 24VDC 0.2A HS (4xM12) | 767-5401 | 1 |
| Accessories | | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |
| Technical Data | | |
| Module supply: | | |
| Connection type (1) | M12 connectors, A coded, 4 poles; | |
| | Derating must be observed | |
| Current carrying capacity of supply connections | Max. 8 A (U_{IS} : 4 A, U_A : 4 A) | |
| Supply voltage | | |
| Logic and sensor voltage U_{IS} | 24 V DC (-25 % ... +30 %) | |
| Actuator voltage U_A | 24 V DC (-25 % ... +30 %) | |
| Supply current | | |
| Logic and sensor current I_{IS} | typ. 40 mA (logic component only) | |
| Actuator current I_A | typ. 30 mA + sensors/actuators (max. 1000 mA) + load | |
| Protection | Reverse voltage protection for U_{IS} + U_A | |
| | Short-circuit protection for sensor/actuator supply | |

| Technical Data | |
|---------------------------------|---|
| Digital inputs: | |
| Number of inputs | 4 |
| Connection type (2) | M12 connectors, A coded, 5 poles, shielded |
| Wire connection | 2- or 3-wire |
| Front-end cycle time (hardware) | max. 3 μ s |
| Front-end jitter/skew (input) | < 2 μ s |
| Input characteristic | Type 1, acc. to IEC 61131-2 |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +15 V ... +30 V DC |
| Input wiring | high-side switching |
| Input voltage | 24 VDC (-3 VDC < U_{IN} < +30 VDC); Power from U_A strongly recommended |
| Input current (typ.) | 2.9 mA |
| Connection of 2-wire BEROs | max. 1.5 mA admissible closed current |
| Wrong connection of inputs | No effect |
| Cable length, shielded | \leq 30 m |
| Input characteristic: | |
| Input voltage | Typical input current |
| 0 V | 0 mA |
| 5 V | 2.0 mA |
| 15 V | 2.5 mA |
| 24 V | 2.9 mA |
| 30 V | 3.2 mA |





Digital Inputs/Outputs
X1 ... X4



1: 24 V
3: 0 V U_A

5: Shield

4: In-/Output
Housing: Shield




1: 24 V U_{IS}
2: 24 V U_A
3: 0 V U_{IS}
4: 0 V U_A

Block diagram of an input/output

Digital Input/Output
X1 ... X4

Supply

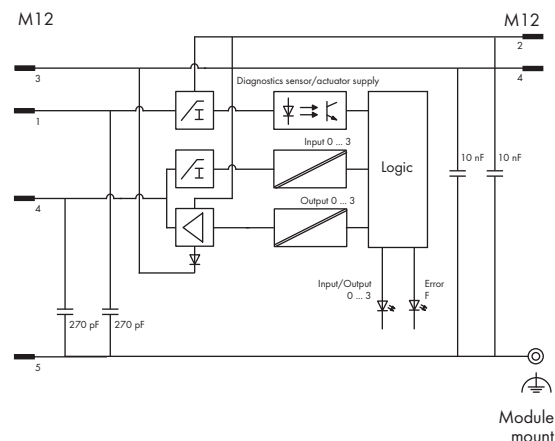

Technical Data

Digital outputs:

| | |
|---|---|
| No. of outputs | 4 |
| Connection type (2) | M12 connectors, A coded, 5 poles, shielded |
| Wire connection | 2- or 3-wire |
| Output voltage | ≤ U _A |
| Output current (per channel) | 0.2 A, short-circuit/overload proof (thermal disconnection) |
| Voltage drop against U _A at 200 mA | Max. 2.0 V DC |
| Output current (module) | max. 0.8 A |
| Leakage current in OFF state | typ. 100 µA |
| Output circuit | Push/Push |

Information on actuator selection:

| | |
|-------------------------------------|--|
| Front-end cycle time 90% (hardware) | max. 0,5 µs |
| Edge steepness | T _{ON/OFF} : typ. < 0,2 µs |
| Front-end jitter/skew (output) | < 0,2 µs |
| Type of load | Inductive, resistive loads and lamps |
| Switching frequency | Inductive load upon request Resistive load upon request Lamp load upon request |
| Type of protective circuit | External protection (e.g., recovery diodes) |

Operating state influence on output:

| | |
|--|-----------------------------------|
| PLC CPU stop | Acc. to substitute value strategy |
| Fieldbus disruption | Acc. to substitute value strategy |
| S-bus (system bus) disruption | 0 V status |
| Supply voltage under rated voltage tolerance | 0 V status |
| Interruption of supply voltage | 0 V status |
| Output operation | Non-latching |
| Overload behavior | Automatic restart |

Technical Data

Counters:

| | |
|------------------------------|-------------------------------------|
| No. of counters | 1 |
| Counter type | Event, gateway time, pulse duration |
| Counting/switching frequency | 0 Hz ... 1 kHz |

System bus:

| | |
|---------------------|--|
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|--------------------|----|
| Conformity marking | CE |
| UL 508 | |

Isolation:

| | |
|---|--------------|
| Channel - Channel | No |
| U _{IS} , U _A , system bus | 500 VDC each |

Configurable functions:

| | |
|---|--|
| Operating mode (per module) | DO module/DI module/DIO module/ DIO + 1 counter |
| Input filter (per channel) | 10/ 25/ 50/ 100/ 200 µs/ 1/ 3 ms/ filter off |
| Inversion (per channel) | On/off |
| Substitute value strategy (per channel) | Switch substitute value/hold last value |
| Substitute value (per channel) | 0/1 |
| Manual mode (per channel) | On/off |
| Manual mode value (per channel) | 0/1 |
| Online simulation (per channel) | Lock/unlock, simulation value: 0/1 |
| Online simulation (per channel/module) | Diagnostics |

I/O diagnostics:

| | |
|-------------------------------|---|
| I/O diagnostics (per channel) | Overtemperature |
| I/O diagnostics (per module) | Short-circuit of sensor/actuator supply Undervoltage (U _{IS} + U _A) |

Process image:

| | |
|--------------------|---------------------------|
| Process data width | depends on operating mode |
|--------------------|---------------------------|


LED indicators:

| | |
|--|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 - 3: Signal status, inputs/outputs | LED (yellow/red) |
| 0 - 3: Diagnostics, outputs | LED (red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 255 g |

6 Analog Input Module Voltage/Current
484 4 inputs

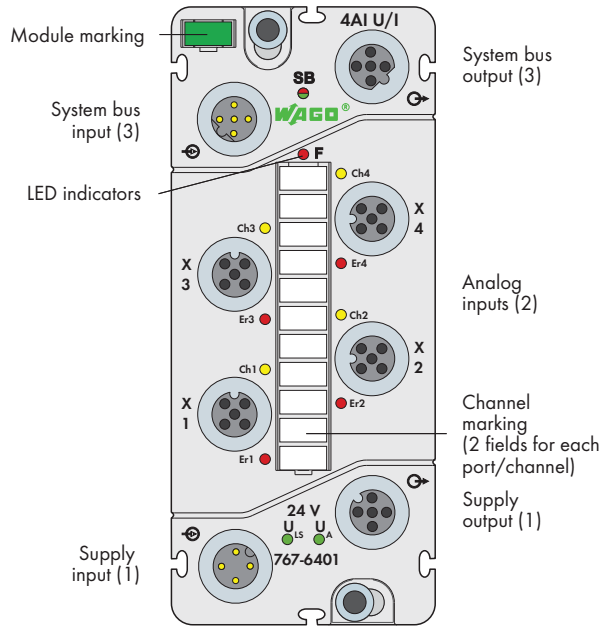

Short description:

Analog input module records voltage and current signals.

Characteristics:




- 4 analog inputs 0-20 mA, 0-22 mA (acc. to NAMUR NE43), 4-20 mA, ± 20 mA, 0-10 V or ± 10 V
- Diagnostic capable
- Parametrizable (measuring range, limiting value, filter, substitute value, online simulation and diagnostics)

Included:


- Module WMB marker card, green (1 pcs)
- Marker strips (1 pcs)
- M12 protective caps (2 pcs)

| Description | Item No. | Pack. Unit |
|--|------------------------------------|------------|
| 4AI U/I | 767-6401 | 1 |
| Accessories | | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |

| Technical Data | |
|---|--|
| Module supply: | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity of supply connections | Max. 8 A (U_{IS} : 4 A, U_A : 4 A) |
| Supply voltage | |
| Logic and sensor voltage U_{IS} | 24 V DC (-25 % ... +30 %) |
| Actuator voltage U_A | 24 V DC (-25 % ... +30 %); Also required for power supply transmission |
| Supply current | |
| Logic and sensor current I_{IS} | 50 mA + sensors (max. 400 mA) |
| Actuator current I_A | 5mA |
| Protection | Reverse voltage protection for U_{IS} + U_A ; short circuit protection for sensor supply |
| Analog inputs: | |
| Number of inputs | 4 |
| Connection type (2) | M12 connectors, A coded, 5 poles |
| Type of signal | Currents and voltages (differential inputs) |
| Wire connection | 2-/3-/4-wire (external shield (screen) via knurled nut) |
| Measuring range | 0-20mA, 0-22mA, 4-20mA, ± 20 mA, 0-10V, ± 10 V |
| Input impedance | $AI(U) \geq 100$ k Ω $AI(I) \leq 200$ Ω at 20 mA |
| Type of cable, cable length | shielded, ≤ 30 m |

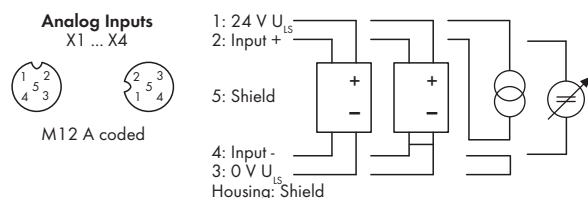

Block diagram of an input

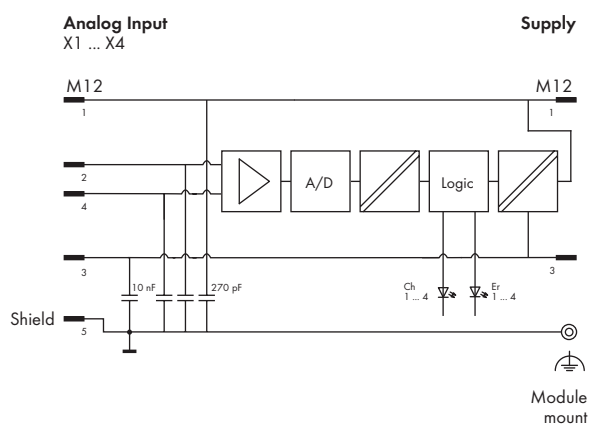


| Technical Data | |
|---|--|
| Analog value creation: | |
| Resolution | 16 bits |
| Conversion method | SAR |
| Monotonicity without error code | yes |
| Conversion time | 1 ms |
| Sampling delay | 1 ms (module) |
| Sampling repeat time | < 100 µs (channel/channel) |
| Sampling repeat time | 1ms |
| Failures and errors: | |
| Voltage proof | up to 32 V (internal current limitation) |
| Max. measuring error at 25 °C | ≤ ± 0.2 % of the measuring range |
| Temperature error | ≤ 100 ppm/K of measuring range |
| Maximum error over the full temperature range | ≤ ± 0.6 % of the measuring range |
| System bus: | |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
| Standards and approvals: | |
| Conformity marking | CE |
| Korea Certification | KCC |
| UL 508 | UL 508 |

| Technical Data | |
|--|---|
| Isolation: | |
| Channel - Channel | No |
| U _{IS} , U _A system bus | 500 V DC each |
| Configurable functions: | |
| Measuring range (per channel) | 0-20 mA, 4-20 mA, ±20 mA, 0-10 V, ±10 V, user-defined |
| Limiting values (per channel) | Min./Max. |
| Input filter (per channel) | 50 Hz / 60 Hz / filter off |
| Substitute value (per channel) | Value |
| Online simulation (per channel) | Lock/unlock; simulation value: (according to measuring range) |
| Online simulation (per channel/module) | Diagnostics |
| I/O diagnostics: | |
| I/O diagnostics (per channel) | Overrange/measuring range underflow and wire break at 4-20 mA Overcurrent Limit value violation (min/max) |
| I/O diagnostics (per module) | Short circuit/overload (sensor supply) undervoltage (U _{IS} + U _A) |
| Process image: | |
| Process data width | 8-byte data + status |
| LED indicators: | |
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| Ch1 ... Ch4: Input signal status | LED (yellow) |
| Er1 ... Er4: Input signal error | LED (red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |
| General Specifications | |
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 262 g |

Analog Input Module RTD

4 inputs

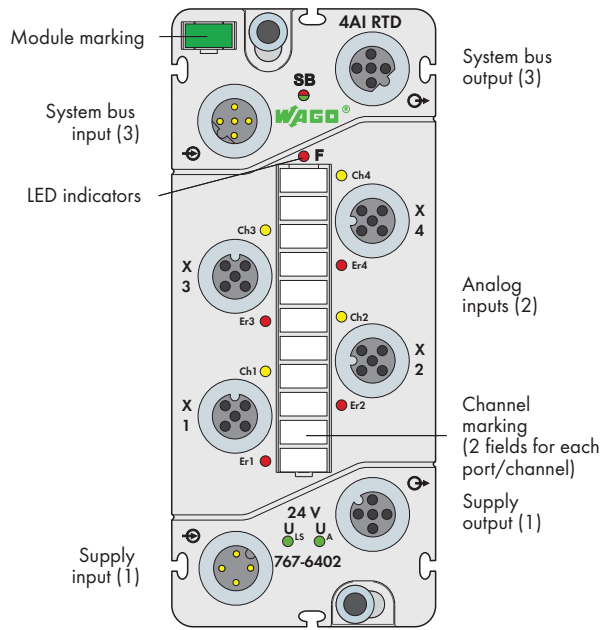

Short description:

Analog input module records the values from resistance thermometers, resistors and potentiometer adjustment.

Characteristics:




- 4 RTD analog inputs
- Diagnostic capable
- Parametrizable (measuring range, limiting value, filter, substitute value, online simulation and diagnostics)

Included:


- Module WMB marker card, green (1 pcs)
- Marker strips (1 pcs)
- M12 protective caps (2 pcs)

| Description | Item No. | Pack. Unit |
|--|------------------------------------|------------|
| 4AI RTD | 767-6402 | 1 |
| Accessories | | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |

| Technical Data | |
|---|--|
| Module supply: | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity of supply connections | Max. 8 A (U_{IS} : 4 A, U_A : 4 A) |
| Supply voltage | |
| Logic and sensor voltage U_{IS} | 24 V DC (-25 % ... +30 %) |
| Actuator voltage U_A | 24 V DC (-25 % ... +30 %); Also required for power supply transmission |
| Supply current | |
| Logic and sensor current I_{IS} | typ. 40 mA |
| Actuator current I_A | 4mA |
| Protection | Reverse voltage protection for U_{IS} + U_A |
| Analog inputs: | |
| Number of inputs | 4 |
| Connection type (2) | M12 connectors, A coded, 5 poles |
| Type of signal | Resistors, Potentiometer Positions |
| Wire connection | 2-/3-/4-wire (external shield (screen) via knurled nut) |
| Signal measuring range | |
| Resistance thermometer | Pt100, Pt200, Pt500, Pt1000 Ni100, Ni120, Ni1000 |
| Resistors | 1 k Ω and 4 k Ω |
| Potentiometer | 0 ... 100 % setting angle (for 1 k Ω and 4 k Ω) |
| Temperature range | Pt: -200 °C ... +850 °C Ni: -60 °C ... +250 °C |
| Resolution (over entire range) | 0.05 °C / 0.05 Ω / 0.25 Ω / 0.005 % |
| Measuring current | < 0.5 mA |
| Type of cable, cable length | shielded, \leq 30 m |

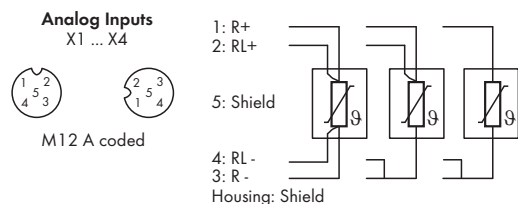

Block diagram of an input

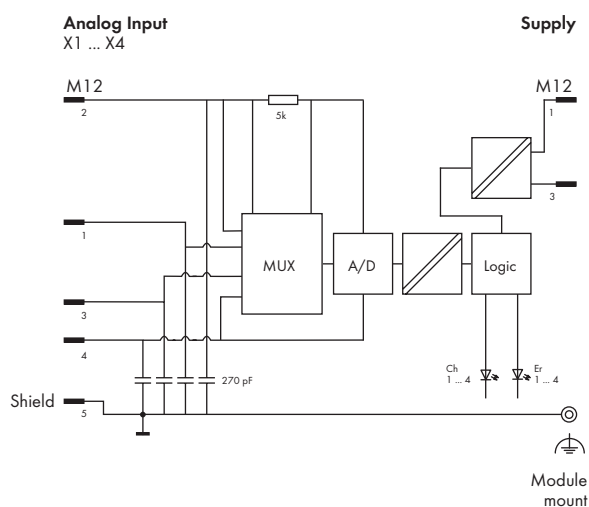


| Technical Data | |
|---|---|
| Analog value creation: | |
| Resolution | 16 bits |
| Integration time | 2 - 120ms |
| Conversion method | SigmaDelta |
| Monotonicity without error code | yes |
| Conversion time | 1/Input sampling frequency (s) |
| Sampling repeat time | Number of active channels x conversion time x 2 |
| Failures and errors: | |
| Max. measuring error at 25°C | ± 0.1 % of the measuring range |
| Temperature error | ± 0.001 % of the measuring range/ K |
| Maximum error over the full temperature range | < 2°C |
| Maximum temporary deviation | 0.05 °C |
| Repeat accuracy | 0.05 °C |
| System bus: | |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
| Standards and approvals: | |
| Conformity marking | CE |
| Korea Certification | |
| UL 508 | |

| Technical Data | |
|--|---|
| Isolation: | |
| Channel - Channel | No |
| U _{IS} , U _A system bus | 500 V DC each |
| Configurable functions: | |
| Measuring range (per channel) | Pt100/ Pt200/ Pt500/ Pt1000, Ni100/ Ni120/ Ni1000; |
| | 1 kΩ / 4 kΩ; |
| | 0 ... 100 % setting angle (for 1 kΩ and 4 kΩ); user-defined |
| Wire connection (per channel) | 2-wire/3-wire/4-wire |
| Limiting values (per channel) | Min./Max. |
| Integration time (per channel) | 2, 4, 8, 16.7, 20, 30, 60, 120ms |
| Linearization (per channel) | Linear/Pt/Ni/Ni TK 5000/Ni TK 6720 |
| Online simulation (per channel) | Lock/unlock; simulation value: (according to measuring range) |
| Online simulation (per channel/module) | Diagnostics |
| I/O diagnostics: | |
| I/O diagnostics (per channel) | Measurement range overflow/underflow |
| | Limit violation (min./max.) |
| I/O diagnostics (per module) | Undervoltage (U _{IS} + U _A) |
| Process image: | |
| Process data width | 8-byte data + status |
| LED indicators: | |
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| Ch1 ... Ch4: Input signal status | LED (yellow) |
| Er1 ... Er4: Input signal error | LED (red) |
| U _{IS} + U _A : Supply status | LED (green) |
| General Specifications | |
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 280 g |

Analog Input Module for Thermocouples (TCs)

4 inputs

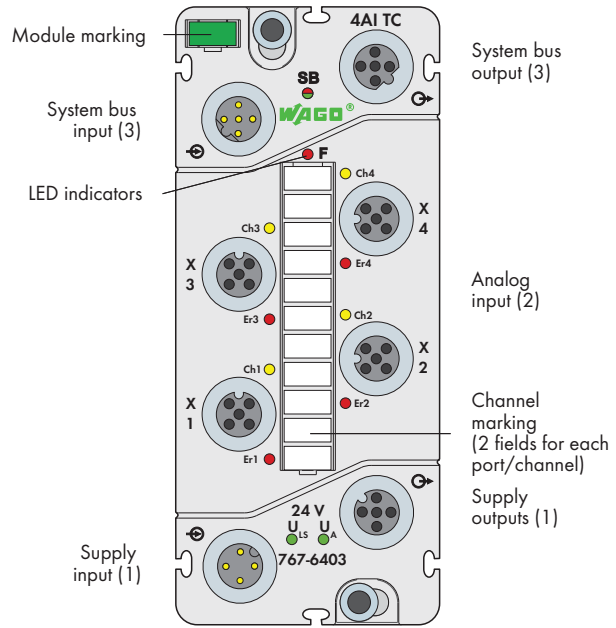

Short description:

This analog input module receives the measured values from thermocouples and voltage sensors.

Characteristics:

- 4 analog inputs TC*
- Diagnostic capable
- Parametrizable (measuring range, limiting values, filter, cold junction compensation, substitute value, online simulation and diagnostics)





* Preassembled connector for cold junction compensation available as accessory.

Included:


- WMB module marker card, green
- Marker strip
- M12 protective caps (2 pcs)

| Description | Item No. | Pack. Unit |
|---|------------------------------------|------------|
| 4AI TC | 767-6403 | 1 |
| Accessories | | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |
| Compensation connector, M12 plug, straight, spring clamp technology | 756-9207/050-000 | |

| Technical Data | |
|---|--|
| Module supply: | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity of supply connections | Max. 8 A (U_{IS} : 4 A, U_A : 4 A) |
| Supply voltage | |
| Logic and sensor voltage U_{IS} | 24 V DC (-25 % ... +30 %) |
| Actuator voltage U_A | 24 V DC (-25 % ... +30 %); Also required for power supply transmission |
| Supply current | |
| Logic and sensor current I_{IS} | Typ. 40 mA |
| Actuator current I_A | ≤ 5mA |
| Protection | Reverse voltage protection for $U_{IS} + U_A$ |
| Analog inputs: | |
| Number of inputs | 4 |
| Connection type (2) | M12 connectors, A coded, 5 poles |
| Type of signal | Thermocouple and low voltages |
| Wire connection | 2-wire (external shield (screen) via knurled nut) |



Block diagram of an input

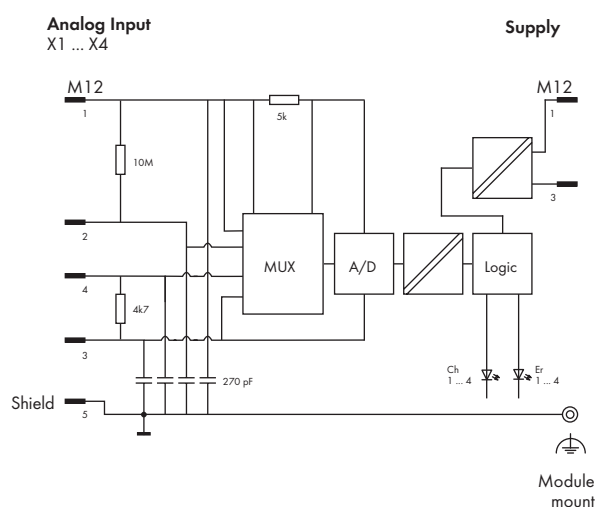

Technical Data

Analog inputs:

Signal measuring range

Measuring range

Thermocouples:

Type B: +200 °C ... +1,820 °C

Type C: 0 °C ... +2320 °C

Type E: -250 °C ... +1000 °C

Type J: -210 °C ... +1200 °C

Type K: -210 °C ... +1370 °C

Type N: -210 °C ... +1300 °C

Type R: -50 °C ... +1768 °C

Type S: -50 °C ... +1768 °C

Type T: -210 °C ... +400 °C

Voltage sensors:

MB1: ± 36 mV

MB2: ± 72 mV

MB3: ± 145 mV

MB4: ± 290 mV

Resolution (over entire range)

0.1 °C or 0.01 mV

Type of cable, cable length

shielded, ≤ 30 m

Analog value creation:

Resolution

16 bits

Integration time

2 - 120ms

Conversion method

SigmaDelta

Monotonicity without error code

Yes

Conversion time

Integration time x 3

Sampling repeat time

Number of active channels x conversion time

Failures and errors:

Max. measuring error (without

temperature compensation)

≤ ± 1 K over the entire measuring range
(for type K)

Max. measuring error cold junction

≤ ± 1K

Temperature error

± 0.05 K/K (type K)

Maximum error over the full

temperature range

± 3K

System bus:

Connection type (3)

M12 connectors, B coded, 5 poles,
shielded

Standards and approvals:

Conformity marking

CE

Korea Certification

KC

UL 508

Technical Data

Isolation:

Channel - Channel

No

 U_{LS} , U_A system bus

500 V DC each

Configurable functions:

Measuring range (per channel)

Type B; C; E; J; K; N; R; S; T
MB 1; MB 2; MB 3; MB 4;
user-defined

Limiting values (per channel)

Min./Max.

Integration time (per channel)

2, 4, 8, 16.7, 20, 30, 60, 120ms

Linearization (per channel)

Linear; Type B; C; ...T

Substitute value (per channel)

Value

Cold junction compensation (per channel)

Type:

Fixed temperature;

Compensation on the current input;

Compensation on the previous input;

Temperature: Value**Offset:** Value

Online simulation (per channel)

Lock/unlock; simulation value: (according
to measuring range)Online simulation (per channel/
module)

Diagnostics

I/O diagnostics:

I/O diagnostics (per channel)

Overrange/measuring range underflow

Limit value violation (min/max)

Wire break

I/O diagnostics (per module)

Undervoltage (U_{LS} + U_A)

Process image:

Process data width

8-byte data + status

LED indicators:

SB: System bus status

LED (green/red/orange)

F: Error status

LED (red)

Ch1 ... Ch4: Input signal status

LED (yellow)

Er1 ... Er4: Input signal error

LED (red)

General Specifications


Dimensions (mm) W x H x L

50 x 35.7 x 117

Weight

280 g

6 Analog Output Module Voltage/Current
490 4 outputs

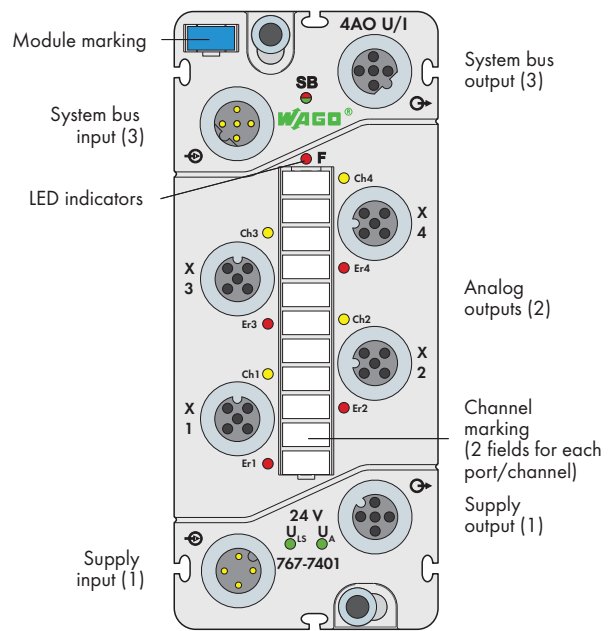




Short description:
Analog output module for the output of voltage and current signals.

- Characteristics:**
- 4 analog outputs 0-20 mA, 4-20 mA, ± 20 mA, 0-10 V or ± 10 V
 - Diagnostic capable
 - Parametrizable (measuring range, substitute value strategy, substitute value, manual mode, online simulation and diagnostics)


- Included:**
- Module WMB marker card, blue (1 pcs)
 - Marker strips (1 pcs)
 - M12 protective caps (2 pcs)

| Description | Item No. | Pack. Unit |
|-------------------------------------|------------------------------------|------------|
| 4AO U/I | 767-7401 | 1 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| Accessories | Item No. | |
| Marking strips, marking pen, spacer | see pages 520 ... 521 | |
| module and protective caps | | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

| Technical Data | |
|---|--|
| Module supply: | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity of supply connections | Max. 8 A (U_{IS} : 4 A, U_A : 4 A) |
| Supply voltage | |
| Logic and sensor voltage U_{IS} | 24 V DC (-25 % ... +30 %) |
| Actuator voltage U_A | 24 V DC (-25 % ... +30 %) |
| Supply current | |
| Logic and sensor current I_{IS} | 28 mA (only logic part) |
| Actuator current I_A | 34 mA + actuators |
| Protection | Reverse voltage protection for U_{IS} + U_A ; Overload and short circuit protection for U_A |
| Analog outputs: | |
| No. of outputs | 4 |
| Connection type (2) | M12 connectors, A coded, 5 poles |
| Type of signal | Currents and voltages |
| Wire connection | 2-/3-/4-wire (external shield (screen) via knurled nut) |
| Measuring range | 0-20mA, 4-20mA, ± 20 mA, 0-10V, ± 10 V |
| Output load (load impedance) | $\leq 500 \Omega$ (current) $\geq 5 k\Omega$ (voltage) |
| Maximum capacitive load (at voltage outputs) | 10 nF |
| Maximum inductive load (at current outputs) | 1 mH |
| Type of cable, cable length | shielded, ≤ 30 m |
| | |
| | |
| | |

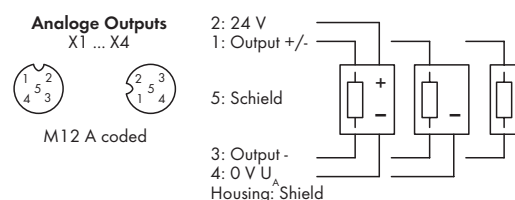

Block diagram of an output

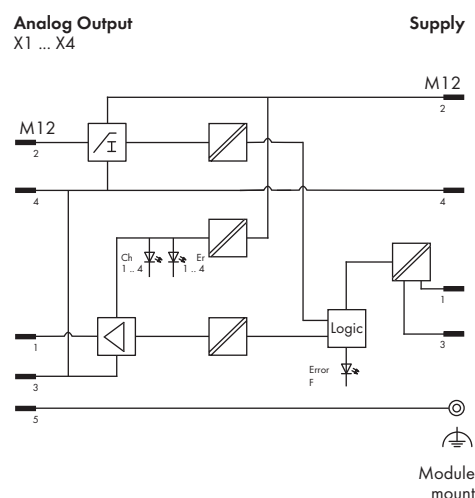

Technical Data

Analog value creation:

| | |
|--|------------------------------------|
| Resolution | 15-bit unipolar, 16-bit bipolar |
| Monotonicity | yes |
| Cycle time | approx. 1 ms |
| Recovery time for resistive, inductive and capacitive loads | approx. 1 ms |

Failures and errors:

| | |
|---|---|
| Maximum continuous overload (without failure) | 0 Ω |
| Max. measuring error at 25 °C | ≤ ± 0.2 % of the measuring range |
| Temperature error | ≤ 100 ppm/K of measuring range |
| Maximum error over the full temperature range | ≤ ± 0.6 % of the measuring range |
| Overshooting | approx. ± 0.05 % of the measuring range |
| Output ripple | approx. ± 0.02 % of the measuring range |
| Crosstalk between the channels at DC voltage and AC voltage 50 Hz and 60 Hz | - 90 dB |
| Short circuit protection | electronic |
| Nominal output current | max. 1 A |

System bus:

| | |
|---------------------|---|
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|---|

Standards and approvals:

| | |
|---------------------|--------|
| Conformity marking | CE |
| Korea Certification | KCC |
| UL 508 | UL 508 |

Technical Data

Isolation:

| | |
|---|---------------|
| Channel - Channel | No |
| U _{IS} , U _A system bus | 500 V DC each |

Configurable functions:

| | |
|---|---|
| Measuring range (per channel) | 0-20 mA, 4-20 mA, ±20 mA, 0-10 V, ±10 V, user-defined |
| Substitute value strategy (per channel) | Switch substitute value/hold last value |
| Substitute value (per channel) | 0 mA bzw. 0 V / substitute value according to measuring range |
| Manual mode (per channel) | On/off |
| Manual mode value (per channel) | Value |
| Online simulation (per channel) | Lock/unlock; simulation value: (according to measuring range) |

| | |
|--|-------------|
| Online simulation (per channel/ module) | Diagnostics |
|--|-------------|

I/O diagnostics:

| | |
|-------------------------------|--|
| I/O diagnostics (per channel) | Short circuit (voltage) wire break (current) |
| I/O diagnostics (per module) | Short circuit/overload (actuator supply) undervoltage (U _{IS} + U _A) |

Process image:

| | |
|--------------------|----------------------|
| Process data width | 8-byte data + status |
|--------------------|----------------------|

LED indicators:


| | |
|--|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| Ch1 ... Ch4 : Output signal status | LED (yellow) |
| Er1 ... Er4 : Output signal error | LED (red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 282 g |

6 TTL Incremental/SSI Encoder Interface

Two encoder interfaces (2 x M12) + 4 digital inputs/outputs (2 x M12, two inputs/outputs per connector)

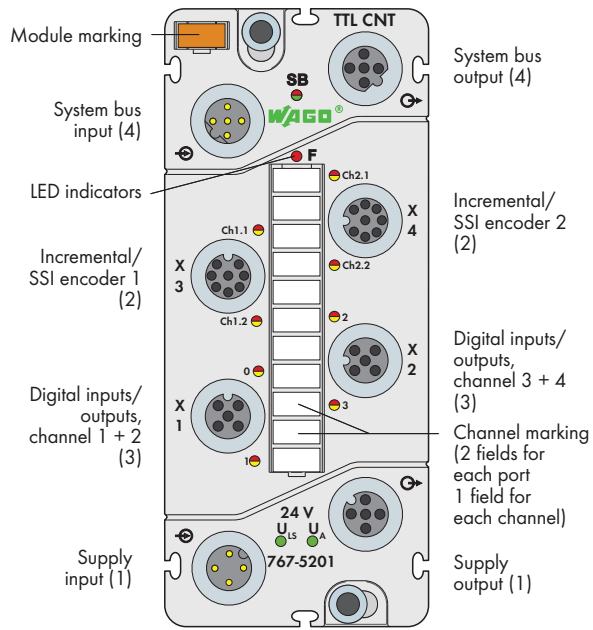

Short description:

The 767-5201 Module evaluates both incremental and absolute encoders with RS-422 signal levels. Integrated DIOs allow outputs to be directly set depending on counter states. Two of the four DIO channels can also be used as PWM outputs*.

Characteristics:

- Two incremental/SSI encoder interfaces
- Four digital inputs/outputs 24 VDC/0.1 A (incl. 2 PWM* outputs)
- Configurable (incremental/SSI encoder, DIOs)
- Diagnostic-capable (channel by channel/module by module)



Included:

- 1 x WMB marker, orange
- 1 x marking strip
- 2 x M12 protective cap

*Pulse-Width Modulated outputs

| Description | Item No. | Pack. Unit |
|--|--|------------|
| TTL Incremental/SSI Encoder | 767-5201 | 1 |
| Accessories | | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |
| Technical Data | | |
| Module supply: | | |
| Connection type (1) | M12 connectors, A coded, 4 poles | |
| Current carrying capacity of supply connections | max. 8 A (U _{IS} : 4 A, U _A : 4 A) | |
| Supply voltage | | |
| Logic and sensor voltage U _{IS} | 24 V DC (-25 % ... +30 %) | |
| Actuator voltage U _A | 24 V DC (-25 % ...+30 %) | |
| Supply current | | |
| Logic and sensor current I _{IS} | typ. 50 mA | |
| Actuator current I _A | typ. 25 mA + actuators (max. 800 mA) | |
| Protection | Reverse voltage protection for U _{IS} + U _A Short-circuit protection for sensor/actuator supply | |

| Technical Data | |
|----------------------------------|--|
| Incremental encoder: | |
| Number of inputs (incremental) | 2 |
| Connection type (2) | M12 connectors, A coded, 8 poles, shielded |
| Sensor supply | 5 V/24 V, max. 300 mA |
| Encoder connection (incremental) | A, A\, B, B\, C, C\ |
| Signal input (incremental) | RS-422 differential signal |
| Counter | 32 bits |
| Max. operating frequency | 1 MHz |
| Zero impulse latch | 32 bits |
| Type of cable, cable length | shielded, ≤ 30 m |
| SSI encoder: | |
| Number of inputs (SSI encoder) | 2 |
| Connection type (2) | M12 connectors, A coded, 8 poles, shielded |
| Sensor supply | 5 V/24 V, max. 300 mA |
| Encoder connection (SSI) | D+, D-, CL+, CL- |
| Signal input (SSI encoder) | +D, -D: RS-422 differential signal |
| Signal output (SSI encoder) | CL+, CL-: RS-422 differential signal |
| Bit width | 32 bits |
| Baud rate | 62.5 kHz ... 2 MHz |
| Method of conversion | Binary/Gray |
| Type of cable, cable length | shielded, ≤ 30 m |

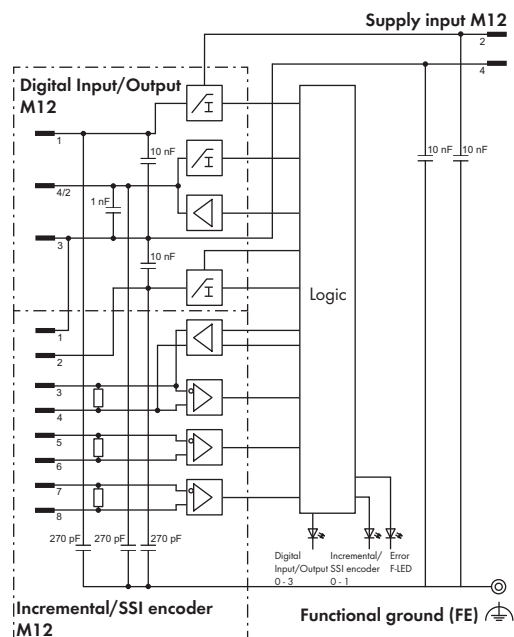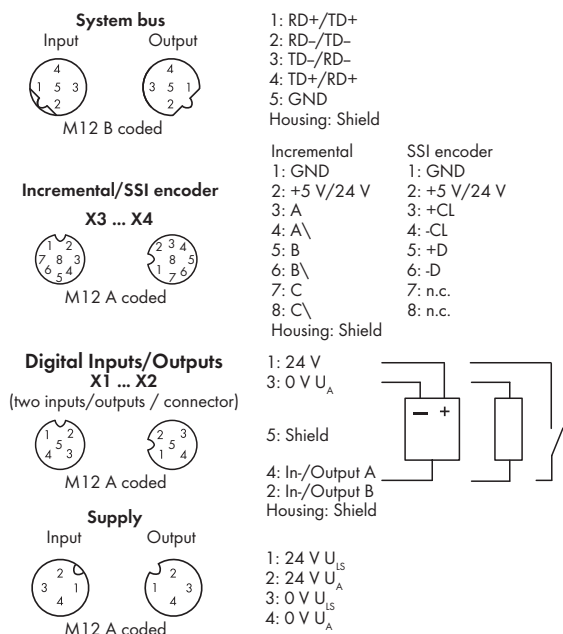

Technical Data

Digital inputs:

| | |
|--|---|
| Number of inputs | 4 |
| Connection type (3) | M12 connectors, A coded, 5 poles, shielded |
| Wire connection | 2- or 3-wire |
| Front-end cycle time (hardware) | max. 3 µs |
| Input characteristic | Type 3, acc. to IEC 61131-2 |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +15 V ... +30 V DC |
| Input wiring | High-side switching |
| Input voltage | 24 VDC (-3 VDC < U _{IN} < +30 VDC) |
| Connection of 2-wire BEROs | max. 1.5 mA admissible closed current |
| Type of cable, cable length (digital inputs) | shielded, ≤ 30 m |

Input characteristic:

| | |
|---------------|-----------------------|
| Input voltage | Typical input current |
| 0 V | 0 mA |
| 5 V | 2.0 mA |
| 15 V | 2.5 mA |
| 24 V | 2.9 mA |
| 30 V | 3.2 mA |

Digital outputs (see manual for actuator selection information)

| | |
|--|---|
| No. of outputs | 4 |
| Connection type (3) | M12 connectors, A coded, 5 poles, shielded |
| Wire connection | 2- or 3-wire |
| Output voltage | ≤ U _A |
| Output current (channel/module) | 0.1 A/0.4 A |
| Short-term output current, 1 s (channel) | 0.2 A |
| Output protection | Short-circuit/overload protection, thermal shutdown |
| Response time | approx. 10 µs (output, 90 %) |
| Pulse width modulation (PWM) | |
| Pulse frequency | 100 Hz ... 10 kHz |
| Pulse duty factor | 0 ... 100 % |
| Resolution | 16 bits (≤ 1 kHz), 12 bits (> 1 kHz) |
| Voltage drop against U _A | max. 1.7 V at 100 mA |
| Leakage current in OFF state | typ. 150 µA |
| Output circuit | push-pull |

Technical Data

System bus:

| | |
|---------------------|--|
| Connection type (4) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|--------------------|----|
| Conformity marking | CE |
| UL 508 | |

Isolation:

| | |
|--|---------------|
| Channel - Channel | no |
| U _{IS} , U _{AA} system bus | 500 V DC each |

Configurable functions: (see manual for configuration details)

| | |
|--|---|
| Incremental encoder (channel by channel) | Evaluation, filter |
| SSI encoder (channel by channel) | Data width/length, transmission rate, etc. |
| Cam (channel-by-channel) | Upper/lower value, output, etc. |
| Pulse-width modulation (channel-by-channel) | Pulse duty factor, frequency, etc.. |
| DIOs (channel by channel/module by module) | Operating mode, filter, substitute value strategy, etc. |
| Configurable functions (channel by channel/module by module) | Online simulation and diagnostics |

I/O diagnostics:

| | |
|-------------------------------|--|
| I/O diagnostics (per channel) | Encoder: Over-/underflow, wire break, limit value violation (min./max.); DIO: Overtemperature (actuators) |
| I/O diagnostics (per module) | Supply: Short-circuit/Overload of sensor/actuator supply, undervoltage (U _{IS} + U _A) |

Process image:

| | |
|------------------------------------|--|
| Process data width | 2 x 4-byte encoder value, 2 x 2-byte control data, 1-byte status DI/control DO |
| Synchronous diagnostics (optional) | 2 bytes |

LED indicators:


| | |
|--|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 - 3: Signal status, inputs/outputs | LED (yellow/red) |
| Ch1 + Ch2: Encoder status | LED (green/yellow/red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 270 g |

HTL Incremental Encoder/Counter Interface

Two encoder/counter interfaces (2 x M12) + 4 digital inputs/outputs (2 x M12, two inputs/outputs per connector)

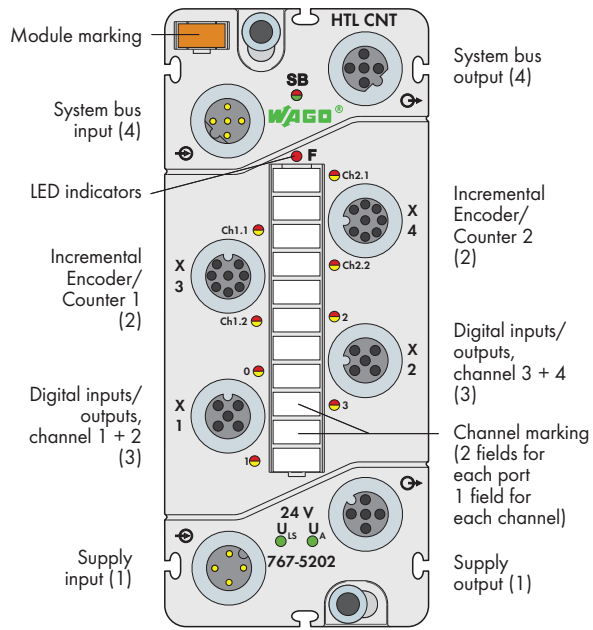

Short description:

The 767-5202 Module evaluates incremental encoders and counts binary signals with 24V signal levels. Integrated DIOs allow outputs to be directly set depending on counter states. Two of the four DIO channels can also be used as PWM outputs*.

Characteristics:

- Two incremental encoder/counter interfaces
- Four digital inputs/outputs 24 VDC/0.1 A (incl. 2 PWM outputs)
- Configurable (incremental encoder, counter, DIOs)
- Diagnostic-capable (channel by channel/module by module)



Included:

- 1 x WMB marker, orange
- 1 x marking strip
- 2 x M12 protective cap

*Pulse-Width Modulated outputs

| Description | Item No. | Pack. Unit |
|--|--|------------|
| HTL Incremental Encoder/Counter | 767-5202 | 1 |
| Accessories | | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |
| Technical Data | | |
| Module supply: | | |
| Connection type (1) | M12 connectors, A coded, 4 poles | |
| Current carrying capacity of supply connections | max. 8 A (U _{IS} : 4 A, U _A : 4 A) | |
| Supply voltage | | |
| Logic and sensor voltage U _{IS} | 24 V DC (-25 % ... +30 %) | |
| Actuator voltage U _A | 24 V DC (-25 % ... +30 %) | |
| Supply current | | |
| Logic and sensor current I _{IS} | typ. 50 mA | |
| Actuator current I _A | typ. 25 mA + actuators (max. 800 mA) | |
| Protection | Reverse voltage protection for U _{IS} + U _A Short-circuit protection for sensor/actuator supply | |

| Technical Data | |
|----------------------------------|---|
| Incremental encoder: | |
| Number of inputs (incremental) | 2 |
| Connection type (2) | M12 connectors, A coded, 8 poles, shielded |
| Sensor supply | 5 V/24 V, max. 300 mA |
| Encoder connection (incremental) | A, A\, B, B\, C, C\ |
| Signal input (incremental) | HTL, differential/single-ended |
| Counter | 32 bits |
| Max. operating frequency | 250 kHz |
| Zero impulse latch | 32 bits |
| Type of cable, cable length | shielded, ≤ 30 m |
| Counters: | |
| Number of inputs (counter) | 2 |
| Connection type (2) | M12 connectors, A coded, 8 poles, shielded |
| Counter type | U/D counter (up/down pulse counting), peak-time counter (number of pulses per time unit), AB counter (A+B; A-B), frequency counter (input frequency, cycle duration), pulse width (pulse width ratio), pulse duration (time in μs) |
| Counter input | 24 V DC |
| Power supply | max. 300 mA |
| Bit width | 32 bits |
| Counter frequency | 250 kHz |

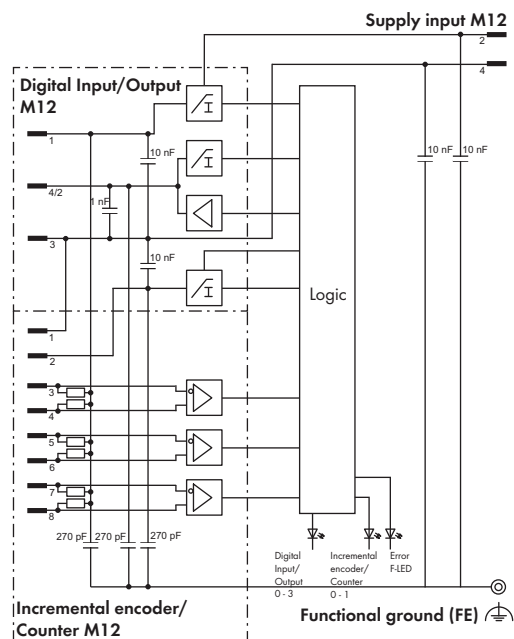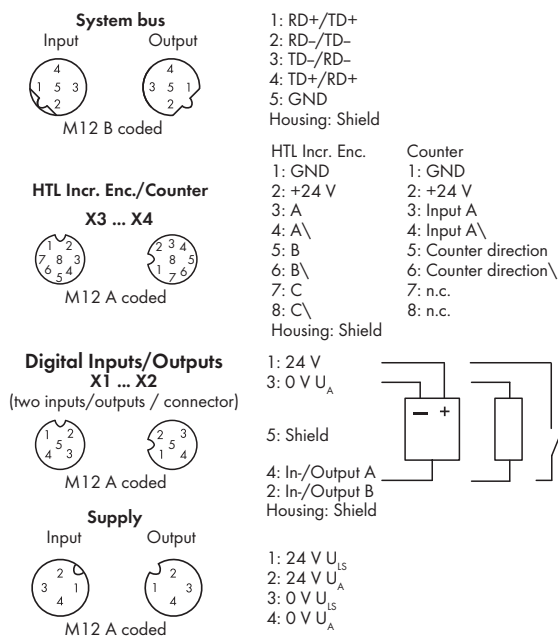

Technical Data

Digital inputs:

| | |
|--|---|
| Number of inputs | 4 |
| Connection type (3) | M12 connectors, A coded, 5 poles, shielded |
| Wire connection | 2- or 3-wire |
| Front-end cycle time (hardware) | max. 3 µs |
| Input characteristic | Type 3, acc. to IEC 61131-2 |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +15 V ... +30 V DC |
| Input wiring | High-side switching |
| Input voltage | 24 VDC (-3 VDC < U _{IN} < +30 VDC) |
| Connection of 2-wire BEROs | max. 1.5 mA admissible closed current |
| Type of cable, cable length (digital inputs) | shielded, ≤ 30 m |

Input characteristic:

| | |
|---------------|-----------------------|
| Input voltage | Typical input current |
| 0 V | 0 mA |
| 5 V | 2.0 mA |
| 15 V | 2.5 mA |
| 24 V | 2.9 mA |
| 30 V | 3.2 mA |

Digital outputs (see manual for actuator selection information)

| | |
|--|---|
| No. of outputs | 4 |
| Connection type (3) | M12 connectors, A coded, 5 poles, shielded |
| Wire connection | 2- or 3-wire |
| Output voltage | ≤ U _A |
| Output current (channel/module) | 0.1 A/0.4 A |
| Short-term output current, 1 s (channel) | 0.2 A |
| Output protection | Short-circuit/overload protection, thermal shutdown |
| Response time | approx. 10 µs (output, 90 %) |
| Pulse width modulation (PWM) | |
| Pulse frequency | 100 Hz ... 10 kHz |
| Pulse duty factor | 0 ... 100 % |
| Resolution | 16 bits (≤ 1 kHz), 12 bits (> 1 kHz) |
| Voltage drop against U _A | max. 1.7 V at 100 mA |
| Leakage current in OFF state | typ. 150 µA |
| Output circuit | push-pull |

Technical Data

System bus:

| | |
|---------------------|--|
| Connection type (4) | M12 connectors, B coded, 5 poles, shielded |
|---------------------|--|

Standards and approvals:

| | |
|--------------------|----|
| Conformity marking | CE |
| UL 508 | |

Isolation:

| | |
|---|---------------|
| Channel - Channel | no |
| U _{IS} , U _A system bus | 500 V DC each |

Configurable functions: (see manual for configuration details)

| | |
|--|---|
| Incremental encoder (channel by channel) | Evaluation, filter |
| Counter (channel by channel) | Gate, direction, gate time, preset, etc. |
| Cam (channel-by-channel) | Upper/lower value, output, etc. |
| Pulse-width modulation (channel-by-channel) | Pulse duty factor, frequency, etc. |
| DIOs (channel by channel/module by module) | Operating mode, filter, substitute value strategy, etc. |
| Configurable functions (channel by channel/module by module) | Online simulation and diagnostics |

I/O diagnostics:

| | |
|-------------------------------|--|
| I/O diagnostics (per channel) | Encoder: Over-/underflow, wire break, limit value violation (min./max.); DIO: Overtemperature (actuators) |
| I/O diagnostics (per module) | Supply: Short-circuit/Overload of sensor/actuator supply, undervoltage (U _{IS} + U _A) |

Process image:

| | |
|------------------------------------|--|
| Process data width | 2 x 4-byte encoder value, 2 x 2-byte control data, 1-byte status DI/control DO |
| Synchronous diagnostics (optional) | 2 bytes |

LED indicators:


| | |
|--|------------------------|
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 - 3: Signal status, inputs/outputs | LED (yellow/red) |
| Ch1 + Ch2: Encoder status | LED (green/yellow/red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 270 g |

6 Serial Interface (RS-232, RS-422/-485)

2 interfaces (2xM12) + 4 digital inputs/outputs (2xM12, two inputs/outputs per connector)

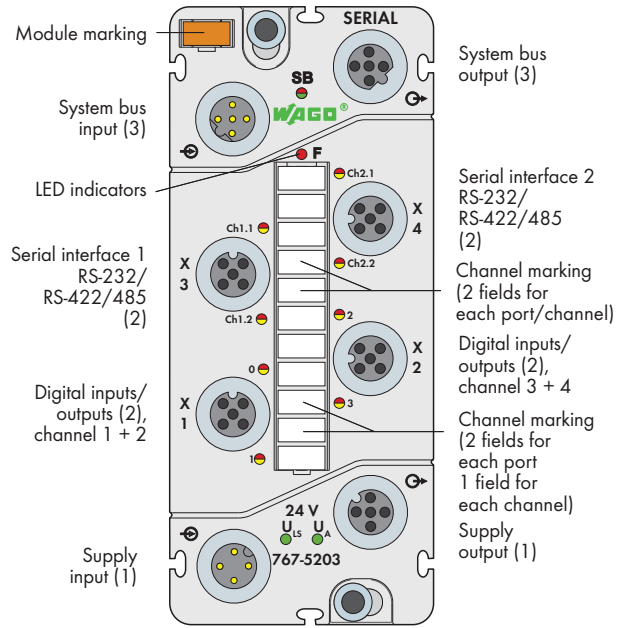

Short description:

The serial interface module controls/monitors devices (e.g., barcode readers, printers, scales, laser measurement systems, operator panels, transponders) and offers in addition digital inputs/outputs.

Characteristics:



- 2 serial interfaces (RS-232, RS-422/-485)
- 4 digital inputs/outputs, 24 VDC / 0.5 A
- Diagnostic capable (per channel/per module)
- Parametrizable (serial interface, operating mode, filter, inversion, substitute value strategy, manual mode, online simulation and diagnostics)

Included:

- 1 x WMB marker, orange
- 1 x marking strip
- 2 x M12 protective cap

| Description | Item No. | Pack. Unit |
|--|--|------------|
| Serial Interface (RS-232, RS-422/-485) | 767-5203 | 1 |
| Accessories | | Item No. |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |
| Technical Data | | |
| Module supply: | | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed | |
| Current carrying capacity of supply connections | max. 8 A (U_{IS} : 4 A, U_A : 4 A) | |
| Supply voltage | | |
| Logic and sensor voltage U_{IS} | 24 V DC (-25 % ... +30 %) | |
| Actuator voltage U_A | 24 V DC (-25 % ... +30 %) | |
| Supply current | | |
| Logic and sensor current I_{IS} | typ. 75 mA + sensors (max. 400 mA) | |
| Actuator current I_A | typ. 25 mA + actuators 2.4 A (4 x 600 mA) | |
| Protection | Reverse voltage protection for $U_{IS} + U_A$ Short-circuit protection for sensor/actuator supply | |
| Serial interface: | | |
| Interfaces | 2 | |
| Connection type (2) | M12 connectors, A-coded, 5 poles, shielded | |
| Transmission channels | 1 Rx/D / 1 Tx/D (full/half duplex) | |
| Type of cable, cable length | 15 m (RS-232); 1000 m (RS-422/-485) | |
| Baud rate | 300 - 115,200 baud | |
| Buffer | 4 KB (In); 4 KB (Out) | |

| Technical Data | |
|------------------------------|--|
| Digital inputs: | |
| Number of inputs | 4 |
| Connection type (2) | M12 connectors, A-coded, 5 poles, shielded |
| Wire connection | 2- or 3-wire |
| Input filter | Hardware: $\leq 110 \mu s$ Software: parametrizable |
| Input characteristic | Type 2, acc. to IEC 61131-2 |
| Signal voltage (0) | -3 V ... +5 V DC |
| Signal voltage (1) | +11 V ... U_A DC |
| Input wiring | High-side switching |
| Input voltage | 24 VDC (-3 VDC < U_{IN} < +30 VDC); Power from U_A is strongly recommended, recovery for voltages > U_A |
| Input current (typ.) | 7.3 mA |
| Connection of 2-wire BEROs | max. 1.5 mA admissible closed current |
| Cable length, unshielded | ≤ 30 m |
| Wrong connection of inputs | No effect |
| Input characteristic: | |
| Input voltage | Typical input current |
| -3 V < U_{IN} < 0 V | 0 mA |
| 5 V | 2.3 mA ... 2.5 mA |
| 11 V | 6.4 mA ... 6.7 mA |
| 24 V < U_A < 31.2 V | 7.3 mA ... 7.5 mA |

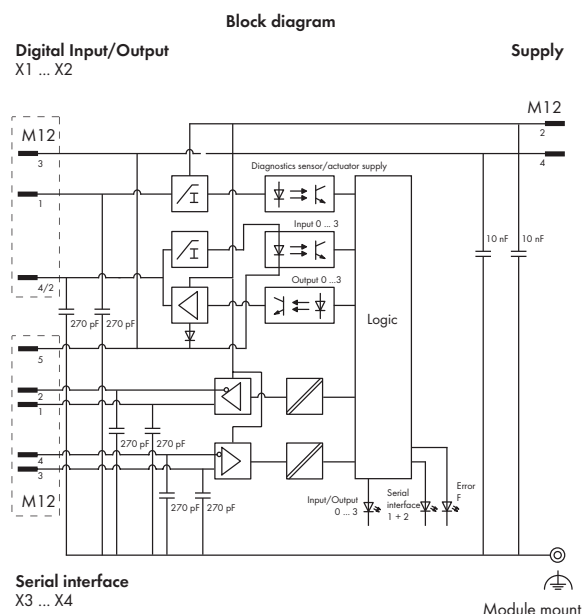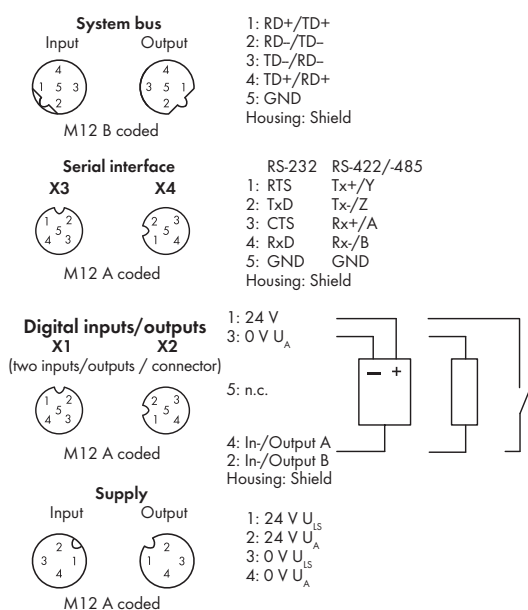


| Technical Data | |
|--|---|
| Digital outputs: | |
| No. of outputs | 4 |
| Connection type (2) | M12 connectors, A-coded, 5 poles, shielded |
| Wire connection | 2- or 3-wire |
| Output voltage | ≤ U _A |
| Output current (per channel) | 0.5 A (max. 0.6 A), short-circuit/overload proof (thermal disconnection) |
| Voltage drop against U _A at 500 mA | max. 0.2 V DC |
| Output current (module) | max. 2 A |
| Leakage current in OFF state | typ. 5 µA |
| Output circuit | High-side switching |
| Information on actuator selection: | |
| Delay time hardware from "0" to "1" (0 - 90%) | typ. 90 µs (resistive load) |
| Delay time hardware from "1" to "0" (0 - 90%) | typ. 310 µs (resistive load) |
| Rise time from "0" to "1" | typ. 60 µs (resistive load) |
| Fall time from "1" to "0" | typ. 45 µs (resistive load) |
| Reverse current (in case of recovery for voltages > U _A) | ≤ 1 A (error: 1 channel) |
| Type of load | Inductive, resistive loads and lamps |
| Switching frequency | Inductive load approx. 20 Hz Resistive load approx. 500 Hz Lamp load approx. 500 Hz |
| Parallel connection of 2 outputs | for power boost for redundant actuation of a load |
| Type of protective circuit | External protection (e.g., recovery diodes) |
| Output resistance | < 0.4 Ω |
| Operating state influence on output: | |
| PLC CPU stop | Acc. to substitute value strategy |
| Fieldbus disruption | Acc. to substitute value strategy |
| S-bus (system bus) disruption | 0 V status |
| Supply voltage under rated voltage tolerance | 0 V status |
| Interruption of supply voltage | 0 V status |
| Output operation | Non-latching |
| Overload behavior | Automatic restart |

| Technical Data | |
|--|---|
| System bus: | |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
| Standards and approvals: | |
| Conformity marking | CE |
| Korea Certification | KC |
| UL 508 | UL 508 |
| Isolation: | |
| Channel - Channel | no |
| U _{IS} , U _A , system bus | 500 V DC each |
| Parameterizable functions, serial interface: | |
| Operating mode (per channel) | RS-232; RS-422/-485 |
| Baud rate (per channel) | 300 - 115,700 baud |
| Data bits (per channel) | 7/8 |
| Parity | None/Even/Odd |
| Stop bits | 1/2 |
| Flow-Control | None/Xon+Xoff/RTS+CTS |
| Parameterizable functions, digital inputs/outputs | |
| Operating mode, input filter, inversion, substitute value strategy, manual mode, online simulation and diagnostics | For details, see manual. |
| I/O diagnostics: | |
| I/O diagnostics (per channel) | Overtemperature |
| I/O diagnostics (per module) | Sensor/Actuator supply short-circuit/overload Undervoltage (U _{IS} + U _A) |
| Process image: | |
| Process data width | Interface: 10 bytes (data in/out + status); DIO: 1-byte data in/out + 1-byte status |
| LED indicators: | |
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 - 3: Signal status, inputs/outputs | LED (yellow/red) |
| Ch1.1 + Ch2.1: Transmission status | LED (yellow/red) |
| Ch1.2 + Ch2.2: Reception status | LED (yellow/red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |
| General Specifications | |
| Dimensions (mm) W x H x L | 50 x 35.7 x 117 |
| Weight | 260 g |

6 MOVILINK® Interface (RS-232, RS-485)

2 interfaces (2 x M12) + 4 digital inputs/outputs (2 x M12, two inputs/outputs per connector)

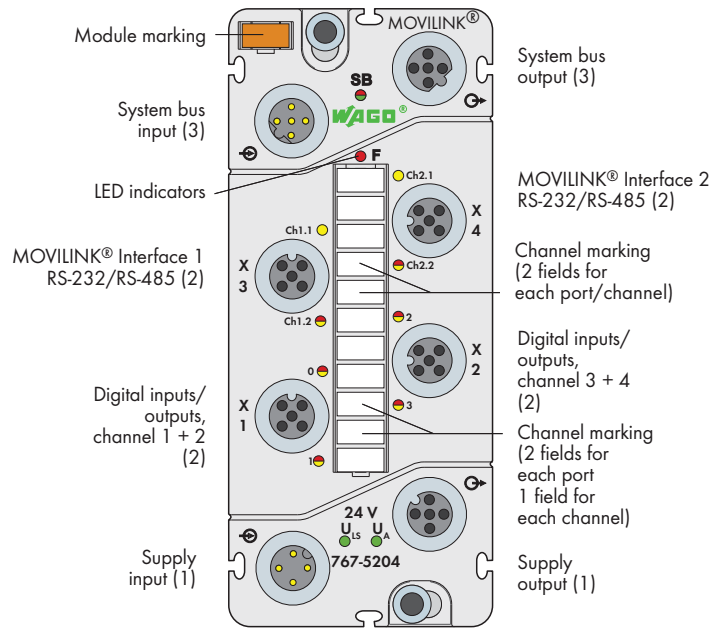

Short description:

Interface module for drive control via MOVILINK® protocol (see note). The maximum number of drives per interface depends on the type of application and is described in more detail in the manual.

Features:

- 2 MOVILINK® interfaces (RS-232, RS-485)
- 4 digital inputs/outputs, 24 VDC / 0.5 A
- Diagnostic-capable (channel by channel/module by module)
- Parametrizable (operating mode, baud rate, filter, inversion, substitute value strategy, substitute value, manual mode, online simulation and diagnostics)

Included:



- 1 x WMB marker, orange
- 1 x marking strip
- 2 x M12 protective cap

Note

MOVILINK® is a registered trademark of SEW-EURODRIVE GmbH & Co. KG

| Description | Item No. | Pack. Unit |
|--|--|------------|
| MOVILINK® Interface (RS-232, RS-485) | 767-5204 | 1 |
| Accessories | | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |
| Technical Data | | |
| Module supply: | | |
| Connection type (1) | M12 connectors, A coded, 4 poles; Derating must be observed | |
| Current carrying capacity of supply connections | max. 8 A (U _{IS} : 4 A, U _A : 4 A) | |
| Supply voltage | | |
| Logic and sensor voltage U _{IS} | 24 V DC (-25 % ... +30 %) | |
| Actuator voltage U _A | 24 V DC (-25 % ... +30 %) | |
| Supply current | | |
| Logic and sensor current I _{IS} | typ. 75mA | |
| Actuator current I _A | typ. 25 mA + Sensors (max. 400 mA) + Actuators 2.4 A (4 x 600 mA) | |
| Protection | Reverse voltage protection for U _{IS} + U _A Short-circuit protection for sensor/actuator supply | |
| MOVILINK® Interface | | |
| Interfaces | 2 | |
| Connection type (2) | M12 connectors, A coded, 5 poles, shielded | |
| Transmission channels | 1 Rx/D / 1 Tx/D (half duplex) | |
| Cable length | max. 15 m (RS-232); max. 200 m (RS-485) | |

| Technical Data | |
|--------------------------------|--|
| MOVILINK® Interface | |
| Baud rate | 9,600 Baud; 57,600 Baud |
| Protocols | MOVILINK® PDU types, 0x05 (cyclic) and 0x85 (acyclic) |
| Data bits (per channel) | 8 |
| Parity | Even |
| Stop bits | 1 |
| Digital inputs: | |
| Number of inputs | 4 |
| Connection type (2) | M12 connectors, A coded, 5 poles, shielded |
| Wire connection | 2- or 3-wire |
| Input filter | Hardware: ≤ 110 µs Software: parametrizable |
| Input characteristic | Type 2, acc. to IEC 61131-2 |
| Signal voltage (0) | -3 ... +5 VDC |
| Signal voltage (1) | + 11 VDC ... U _A |
| Input wiring | High-side switching |
| Input voltage | 24 VDC (-3 VDC < U _{IN} < +30 VDC); Power from U _A is strongly recommended, recovery for voltages > U _A |
| Input current (typ.) | 7.3 mA |
| Connection of 2-wire BEROs | max. 1.5 mA admissible closed current |
| Cable length, unshielded | ≤ 30 m |
| Wrong connection of inputs | No effect |
| Input characteristic: | |
| Input voltage | Typical input current |
| -3 V < U _{IN} < 0 V | 0 mA |
| 5 V | 2.3 mA ... 2.5 mA |
| 11 V | 6.4 mA ... 6.7 mA |
| 24 V < U _A < 31.2 V | 7.3 mA ... 7.5 mA |

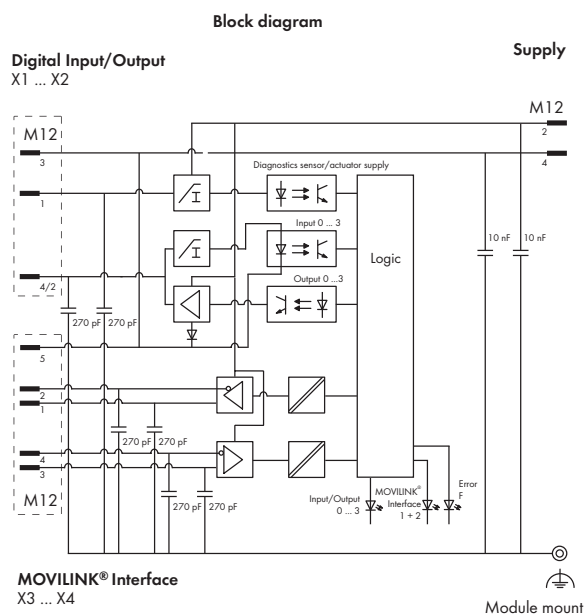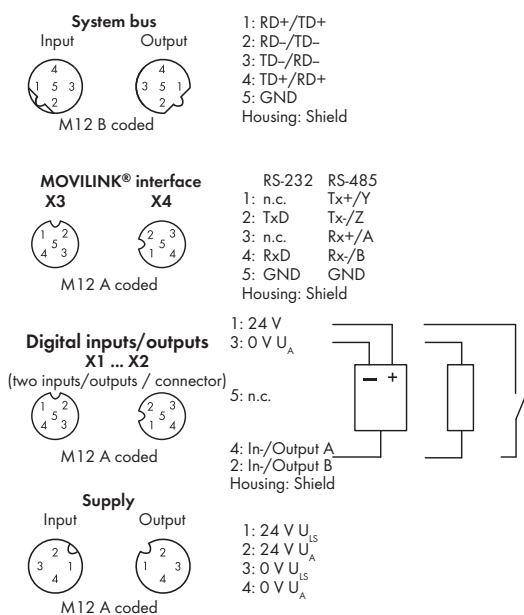


| Technical Data | |
|--|---|
| Digital outputs: | |
| No. of outputs | 4 |
| Connection type (2) | M12 connectors, A coded, 5 poles, shielded |
| Wire connection | 2- or 3-wire |
| Output voltage | ≤ U _A |
| Output current (per channel) | 0.5 A (max. 0.6 A), short-circuit/overload proof (thermal disconnection) |
| Voltage drop against U _A at 500 mA | max. 0.2 V DC |
| Output current (module) | max. 2 A |
| Leakage current in OFF state | typ. 5 µA |
| Output circuit | High-side switching |
| Information on actuator selection: | |
| Delay time hardware from "0" to "1" (0 - 90%) | typ. 90 µs (resistive load) |
| Delay time hardware from "1" to "0" (0 - 90%) | typ. 310 µs (resistive load) |
| Rise time from "0" to "1" | typ. 60 µs (resistive load) |
| Fall time from "1" to "0" | typ. 45 µs (resistive load) |
| Cable length | ≤ 30 m |
| Reverse current (in case of recovery for voltages > U _A) | ≤ 1 A (error: 1 channel) |
| Type of load | Inductive, resistive loads and lamps |
| Switching frequency | Inductive load approx. 20 Hz Resistive load approx. 500 Hz Lamp load approx. 500 Hz |
| Parallel connection of 2 outputs | for power boost for redundant actuation of a load |
| Type of protective circuit | External protection (e.g., recovery diodes) |
| Output resistance | < 0,4 Ω |
| Operating state influence on output: | |
| PLC CPU stop | Acc. to substitute value strategy |
| Fieldbus disruption | Acc. to substitute value strategy |
| S-bus (system bus) disruption | 0 V status |
| Supply voltage under rated voltage tolerance | 0 V status |
| Interruption of supply voltage | 0 V status |
| Output operation | Non-latching |
| Overload behavior | Automatic restart |

| Technical Data | |
|--|---|
| System bus: | |
| Connection type (3) | M12 connectors, B coded, 5 poles, shielded |
| Standards and approvals: | |
| Conformity marking | CE |
| UL 508 | |
| Isolation: | |
| Channel - Channel | no |
| U _{IS} , U _A , system bus | 500 V DC each |
| Parameterizable functions, MOVILINK® interface | |
| Operating mode (per module) | Easy Modus; Mailbox Modus |
| Type (per channel) | RS-232; RS-485 |
| Baud rate (per channel) | 9,600; 57,600 baud |
| Parameterizable functions, digital inputs/outputs | |
| Operating mode, input filter, inversion, substitute value strategy, manual mode, online simulation and diagnostics | For details, see manual. |
| I/O diagnostics: | |
| I/O diagnostics (per channel) | Overtemperature (DO) |
| I/O diagnostics (per module) | Sensor/Actuator supply short-circuit/overload Undervoltage (U _{IS} + U _A) |
| Process image: | |
| Process data width | Interface: 10-byte In/Out data; DIO: 1-byte In/Out data + 1-byte status |
| LED indicators: | |
| SB: System bus status | LED (green/red/orange) |
| F: Error status | LED (red) |
| 0 - 3: Signal status, inputs/outputs | LED (yellow/red) |
| Ch1.1 + Ch2.1: Transmission status | LED (yellow) |
| Ch1.2 + Ch2.2: Reception status | LED (yellow/red) |
| U _{IS} + U _A : Supply status | LED (green) |
| Indicators | Non-latching |
| General Specifications | |
| Dimensions (mm) W x H x L | 35.7 x 50 x 117 |
| Weight | 260 g |

Power Divider 24 V DC

6 outputs (6xM12)

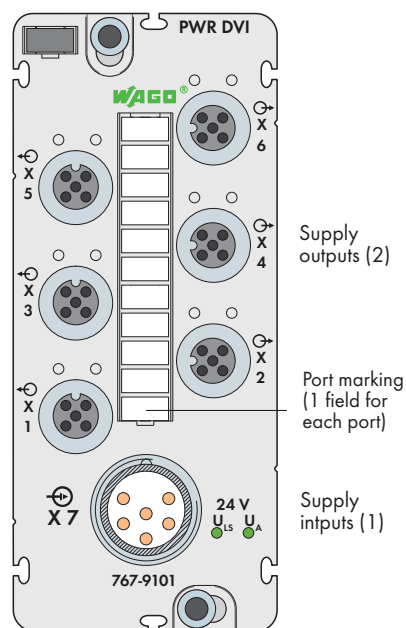**Short description:**

Power divider for supplying SPEEDWAY modules distributed over a large network.

Included:

- Module WMB marker card, gray (1 pcs)
- Marker strips (1 pcs)
- M12 protective caps (2 pcs)

| Description | Item No. | Pack. Unit |
|--|------------------------------------|------------|
| Power Divider | 767-9101 | 1 |
| Accessories | | |
| Marking strips, marking pen, spacer module and protective caps | see pages 520 ... 521 | |
| IP67 cables and connectors | see pages 502 ... 517 + Section 11 | |

| Technical Data | |
|--|---|
| Module supply: | |
| Connection type (1) | M23 connector, 6 poles; Derating must be observed |
| Supply voltage | |
| Logic and sensor voltage U _{IS} | 24 V DC (-25 % ... +30 %) |
| Actuator voltage U _A | 24 V DC (-25 % ... +30 %) |
| Supply current | |
| Logic and sensor current I _{IS} | typ. 4 mA |
| Actuator current I _A | typ. 4mA |
| Supply outputs | |
| No. of outputs | 6 |
| Connection type (2) | M12 connectors, A coded, 4 poles; Derating must be observed |
| Current carrying capacity / connector | Max. 8 A (U _{IS} : 4 A, U _A : 4 A); Derating must be observed |
| Current carrying capacity / module | Max. 24 A (U _{IS} max. 8 A) (U _A max. 16 A); Derating must be observed |
| Short circuit protection | no |
| Isolation: | |
| U _{IS} - U _A | 500 VDC |
| Standards and approvals: | |
| Conformity marking | CE |
| Korea Certification | |
| UL 508 | |

Supply outputs
X1 ... X6



M12 A coded

- 1: 24 V U_{IS}
- 2: 24 V U_A
- 3: 0 V U_{IS}
- 4: 0 V U_A
- 5: n.c.

Supply
Input



M23

- 1: 24 V U_{IS}
- 2: 0 V U_{IS}
- 3: n.c.
- 4: 24 V U_A
- 5: 0 V U_A
- 6: n.c.

Block diagram of power divider

Supply input
X7



Supply outputs
X1 ... X6



Technical Data

Table with 15 empty rows for technical data.

Technical Data


Table with 10 empty rows for technical data.

General Specifications

| | |
|---------------------------|-----------------|
| Dimensions (mm) W x H x L | 50 x 43.3 x 117 |
| Weight | 276 g |


WAGO-SPEEDWAY 767

S-BUS cable suitable for drag chains (system bus cable), assembled on one end

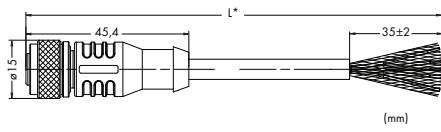


- Pin 1 - 5: 0.14 mm²
- 1 red
 - 2 black
 - 3 blue
 - 4 brown
 - 5 yellow, green, orange, gray

| M12 socket, straight, B coded, suitable for drag chains | Item No. | Pack. Unit |
|---|------------------|------------|
| M12 socket, straight, one free cable end, 2.0 m | 756-1501/060-020 | 1 |
| M12 socket, straight, one free cable end, 5.0 m | 756-1501/060-050 | 1 |
| M12 socket, straight, one free cable end, 10.0 m | 756-1501/060-100 | 1 |
| M12 socket, straight, one free cable end, 20.0 m | 756-1501/060-200 | 1 |

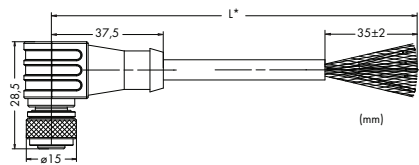


- Pin 1 - 5: 0.14 mm²
- 1 red
 - 2 black
 - 3 blue
 - 4 brown
 - 5 yellow, green, orange, gray

| M12 socket, right angle, B coded, suitable for drag chains | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 socket, right angle, one free cable end, 2.0 m | 756-1502/060-020 | 1 |
| M12 socket, right angle, one free cable end, 5.0 m | 756-1502/060-050 | 1 |
| M12 socket, right angle, one free cable end, 10.0 m | 756-1502/060-100 | 1 |
| M12 socket, right angle, one free cable end, 20.0 m | 756-1502/060-200 | 1 |

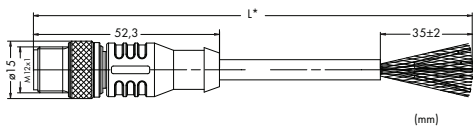

- Pin 1 - 5: 0.14 mm²
- 1 red
 - 2 black
 - 3 blue
 - 4 brown
 - 5 yellow, green, orange, gray

| M12 plug, straight, B coded, suitable for drag chains | Item No. | Pack. Unit |
|---|------------------|------------|
| M12 plug, straight, one free cable end, 2.0 m | 756-1503/060-020 | 1 |
| M12 plug, straight, one free cable end, 5.0 m | 756-1503/060-050 | 1 |
| M12 plug, straight, one free cable end, 10.0 m | 756-1503/060-100 | 1 |
| M12 plug, straight, one free cable end, 20.0 m | 756-1503/060-200 | 1 |

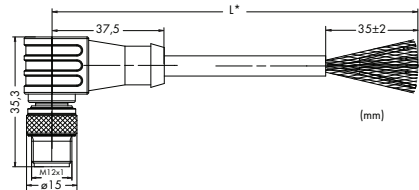


- Pin 1 - 5: 0.14 mm²
- 1 red
 - 2 black
 - 3 blue
 - 4 brown
 - 5 yellow, green, orange, gray

| M12 plug, right angle, B coded, suitable for drag chains | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 plug, right angle, one free cable end, 2.0 m | 756-1504/060-020 | 1 |
| M12 plug, right angle, one free cable end, 5.0 m | 756-1504/060-050 | 1 |
| M12 plug, right angle, one free cable end, 10.0 m | 756-1504/060-100 | 1 |
| M12 plug, right angle, one free cable end, 20.0 m | 756-1504/060-200 | 1 |

* Cable length


WAGO-SPEEDWAY 767

S-BUS cable suitable for drag chains (system bus cable), assembled on both ends and unassembled

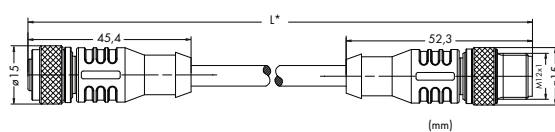

Pin 1 - 5: 0.14 mm²
 1 red
 2 black
 3 blue
 4 brown
 5 yellow, green,
 orange, gray

| M12 socket, straight / M12 plug, straight, B coded, suitable for drag chains | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 socket, straight, M12 plug, straight, 0.2 m | 756-1505/060-002 | 1 |
| M12 socket, straight, M12 plug, straight, 0.3 m | 756-1505/060-003 | 1 |
| M12 socket, straight, M12 plug, straight, 0.5 m | 756-1505/060-005 | 1 |
| M12 socket, straight, M12 plug, straight, 1.0 m | 756-1505/060-010 | 1 |
| M12 socket, straight, M12 plug, straight, 2.0 m | 756-1505/060-020 | 1 |
| M12 socket, straight, M12 plug, straight, 5.0 m | 756-1505/060-050 | 1 |
| M12 socket, straight, M12 plug, straight, 10.0 m | 756-1505/060-100 | 1 |
| M12 socket, straight, M12 plug, straight, 20.0 m | 756-1505/060-200 | 1 |
| M12 socket, straight, M12 plug, straight, 50.0 m | 756-1505/060-500 | 1 |

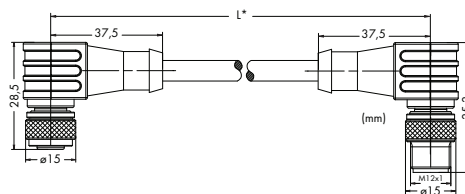

Pin 1 - 5: 0.14 mm²
 1 red
 2 black
 3 blue
 4 brown
 5 yellow, green,
 orange, gray

| M12 socket, right angle / M12 plug, right angle, B coded, suitable for drag chains | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 socket, right angle, M12 plug, right angle, 0.2 m | 756-1506/060-002 | 1 |
| M12 socket, right angle, M12 plug, right angle, 0.3 m | 756-1506/060-003 | 1 |
| M12 socket, right angle, M12 plug, right angle, 0.5 m | 756-1506/060-005 | 1 |
| M12 socket, right angle, M12 plug, right angle, 1.0 m | 756-1506/060-010 | 1 |
| M12 socket, right angle, M12 plug, right angle, 2.0 m | 756-1506/060-020 | 1 |
| M12 socket, right angle, M12 plug, right angle, 5.0 m | 756-1506/060-050 | 1 |
| M12 socket, right angle, M12 plug, right angle, 10.0 m | 756-1506/060-100 | 1 |
| M12 socket, right angle, M12 plug, right angle, 20.0 m | 756-1506/060-200 | 1 |
| M12 socket, right angle, M12 plug, right angle, 50.0 m | 756-1506/060-500 | 1 |


* Cable length



| S-Bus cable, not fitted with connectors, suitable for drag chains | Item No. | Pack. Unit |
|---|-------------------|------------|
| S-BUS cable, not fitted with connectors, 25.0 m | 756-1500/000-250 | 1 |
| S-BUS cable, not fitted with connectors, 50.0 m | 756-1500/000-500 | 1 |
| S-BUS cable, not fitted with connectors, 100.0 m | 756-1500/000-1000 | 1 |


WAGO-SPEEDWAY 767

S-BUS cables, with one end of cable fitted

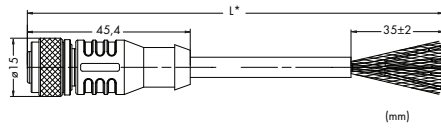


- Pin 1 - 5: 0.14 mm²
 1 white/blue
 2 blue
 3 white/orange
 4 orange
 5 white/green, green, white/brown, brown

| M12 socket, straight, B coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 socket, straight, one free cable end, 2.0 m | 756-1301/060-020 | 1 |
| M12 socket, straight, one free cable end, 5.0 m | 756-1301/060-050 | 1 |
| M12 socket, straight, one free cable end, 10.0 m | 756-1301/060-100 | 1 |
| M12 socket, straight, one free cable end, 20.0 m | 756-1301/060-200 | 1 |

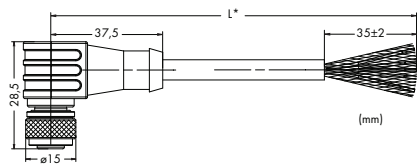


- Pin 1 - 5: 0.14 mm²
 1 white/blue
 2 blue
 3 white/orange
 4 orange
 5 white/green, green, white/brown, brown

| M12 socket, right angle, B coded | Item No. | Pack. Unit |
|---|------------------|------------|
| M12 socket, right angle, one free cable end, 2.0 m | 756-1302/060-020 | 1 |
| M12 socket, right angle, one free cable end, 5.0 m | 756-1302/060-050 | 1 |
| M12 socket, right angle, one free cable end, 10.0 m | 756-1302/060-100 | 1 |
| M12 socket, right angle, one free cable end, 20.0 m | 756-1302/060-200 | 1 |



- Pin 1 - 5: 0.14 mm²
 1 white/blue
 2 blue
 3 white/orange
 4 orange
 5 white/green, green, white/brown, brown

| M12 plug, straight, B coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 plug, straight, one free cable end, 2.0 m | 756-1303/060-020 | 1 |
| M12 plug, straight, one free cable end, 5.0 m | 756-1303/060-050 | 1 |
| M12 plug, straight, one free cable end, 10.0 m | 756-1303/060-100 | 1 |
| M12 plug, straight, one free cable end, 20.0 m | 756-1303/060-200 | 1 |

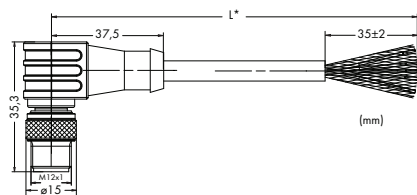


- Pin 1 - 5: 0.14 mm²
 1 white/blue
 2 blue
 3 white/orange
 4 orange
 5 white/green, green, white/brown, brown

| M12 plug, right angle, B coded | Item No. | Pack. Unit |
|---|------------------|------------|
| M12 plug, right angle, one free cable end, 2.0 m | 756-1304/060-020 | 1 |
| M12 plug, right angle, one free cable end, 5.0 m | 756-1304/060-050 | 1 |
| M12 plug, right angle, one free cable end, 10.0 m | 756-1304/060-100 | 1 |
| M12 plug, right angle, one free cable end, 20.0 m | 756-1304/060-200 | 1 |

* Cable length


WAGO-SPEEDWAY 767

S-BUS cables, with both ends of cable fitted and not fitted with connectors

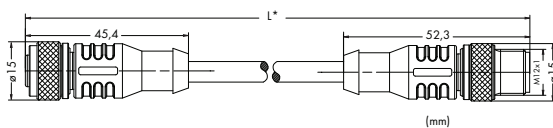

- Pin 1 - 5: 0.14 mm²
 1 white/blue
 2 blue
 3 white/orange
 4 orange
 5 white/green, green, white/brown, brown

| M12 socket, straight / M12 plug, straight, B coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 socket, straight, M12 plug, straight, 0.2 m | 756-1305/060-002 | 1 |
| M12 socket, straight, M12 plug, straight, 0.3 m | 756-1305/060-003 | 1 |
| M12 socket, straight, M12 plug, straight, 0.5 m | 756-1305/060-005 | 1 |
| M12 socket, straight, M12 plug, straight, 1.0 m | 756-1305/060-010 | 1 |
| M12 socket, straight, M12 plug, straight, 2.0 m | 756-1305/060-020 | 1 |
| M12 socket, straight, M12 plug, straight, 5.0 m | 756-1305/060-050 | 1 |
| M12 socket, straight, M12 plug, straight, 10.0 m | 756-1305/060-100 | 1 |
| M12 socket, straight, M12 plug, straight, 20.0 m | 756-1305/060-200 | 1 |
| M12 socket, straight, M12 plug, straight, 50.0 m | 756-1305/060-500 | 1 |

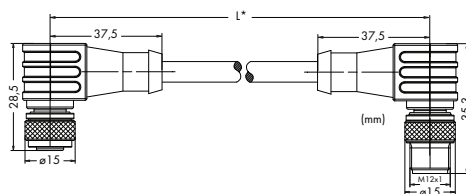

- Pin 1 - 5: 0.14 mm²
 1 white/blue
 2 blue
 3 white/orange
 4 orange
 5 white/green, green, white/brown, brown

| M12 socket, right angle / M12 plug, right angle, B coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 socket, right angle, M12 plug, right angle, 0.2 m | 756-1306/060-002 | 1 |
| M12 socket, right angle, M12 plug, right angle, 0.3 m | 756-1306/060-003 | 1 |
| M12 socket, right angle, M12 plug, right angle, 0.5 m | 756-1306/060-005 | 1 |
| M12 socket, right angle, M12 plug, right angle, 1.0 m | 756-1306/060-010 | 1 |
| M12 socket, right angle, M12 plug, right angle, 2.0 m | 756-1306/060-020 | 1 |
| M12 socket, right angle, M12 plug, right angle, 5.0 m | 756-1306/060-050 | 1 |
| M12 socket, right angle, M12 plug, right angle, 10.0 m | 756-1306/060-100 | 1 |
| M12 socket, right angle, M12 plug, right angle, 20.0 m | 756-1306/060-200 | 1 |
| M12 socket, right angle, M12 plug, right angle, 50.0 m | 756-1306/060-500 | 1 |




| S-Bus cable, not fitted with connectors | Item No. | Pack. Unit |
|--|-------------------|------------|
| S-BUS cable, not fitted with connectors, 25.0 m | 756-1300/000-250 | 1 |
| S-BUS cable, not fitted with connectors, 50.0 m | 756-1300/000-500 | 1 |
| S-BUS cable, not fitted with connectors, 100.0 m | 756-1300/000-1000 | 1 |
| | | |
| | | |
| | | |

* Cable length


WAGO-SPEEDWAY 767

Power supply cables, with one end of cable fitted

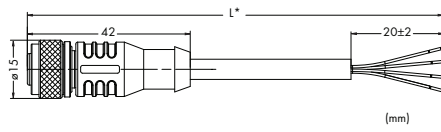


Pin 1 - 4: 0.75 mm²
 1 brown
 2 white
 3 blue
 4 black

| M12 socket, straight, A coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 socket, straight, one free cable end, 2.0 m | 756-3101/040-020 | 1 |
| M12 socket, straight, one free cable end, 5.0 m | 756-3101/040-050 | 1 |
| M12 socket, straight, one free cable end, 10.0 m | 756-3101/040-100 | 1 |
| M12 socket, straight, one free cable end, 20.0 m | 756-3101/040-200 | 1 |

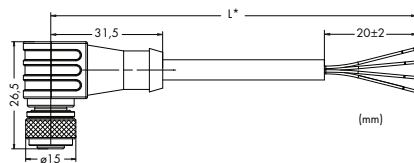


Pin 1 - 4: 0.75 mm²
 1 brown
 2 white
 3 blue
 4 black

| M12 socket, right angle, A coded | Item No. | Pack. Unit |
|---|------------------|------------|
| M12 socket, right angle, one free cable end, 2.0 m | 756-3102/040-020 | 1 |
| M12 socket, right angle, one free cable end, 5.0 m | 756-3102/040-050 | 1 |
| M12 socket, right angle, one free cable end, 10.0 m | 756-3102/040-100 | 1 |
| M12 socket, right angle, one free cable end, 20.0 m | 756-3102/040-200 | 1 |

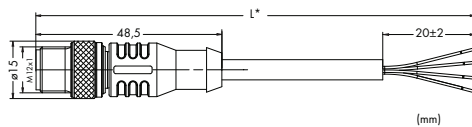

Pin 1 - 4: 0.75 mm²
 1 brown
 2 white
 3 blue
 4 black

| M12 plug, straight, A coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 plug, straight, one free cable end, 2.0 m | 756-3103/040-020 | 1 |
| M12 plug, straight, one free cable end, 5.0 m | 756-3103/040-050 | 1 |
| M12 plug, straight, one free cable end, 10.0 m | 756-3103/040-100 | 1 |
| M12 plug, straight, one free cable end, 20.0 m | 756-3103/040-200 | 1 |

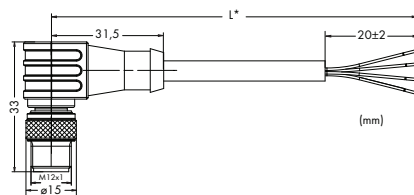


Pin 1 - 4: 0.75 mm²
 1 brown
 2 white
 3 blue
 4 black

| M12 plug, right angle, A coded | Item No. | Pack. Unit |
|---|------------------|------------|
| M12 plug, right angle, one free cable end, 2.0 m | 756-3104/040-020 | 1 |
| M12 plug, right angle, one free cable end, 5.0 m | 756-3104/040-050 | 1 |
| M12 plug, right angle, one free cable end, 10.0 m | 756-3104/040-100 | 1 |
| M12 plug, right angle, one free cable end, 20.0 m | 756-3104/040-200 | 1 |

* Cable length

WAGO-SPEEDWAY 767

Power supply cables, with both ends fitted and not fitted with connectors

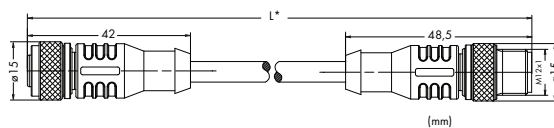


Pin 1 - 4: 0.75 mm²
 1 brown
 2 white
 3 blue
 4 black

M12 socket, straight / M12 plug, straight, A coded

Item No.

Pack. Unit

| | | |
|--|------------------|---|
| M12 socket, straight, M12 plug, straight, 0.2 m | 756-3105/040-002 | 1 |
| M12 socket, straight, M12 plug, straight, 0.3 m | 756-3105/040-003 | 1 |
| M12 socket, straight, M12 plug, straight, 0.5 m | 756-3105/040-005 | 1 |
| M12 socket, straight, M12 plug, straight, 1.0 m | 756-3105/040-010 | 1 |
| M12 socket, straight, M12 plug, straight, 2.0 m | 756-3105/040-020 | 1 |
| M12 socket, straight, M12 plug, straight, 5.0 m | 756-3105/040-050 | 1 |
| M12 socket, straight, M12 plug, straight, 10.0 m | 756-3105/040-100 | 1 |
| M12 socket, straight, M12 plug, straight, 20.0 m | 756-3105/040-200 | 1 |

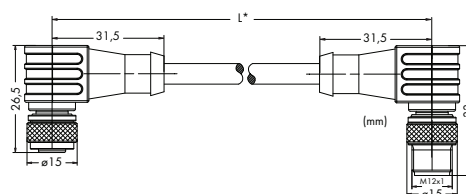

Pin 1 - 4: 0.75 mm²
 1 brown
 2 white
 3 blue
 4 black

M12 socket, right angle / M12 plug, right angle, A coded

Item No.

Pack. Unit

| | | |
|--|------------------|---|
| M12 socket, right angle, M12 plug, right angle, 0.2 m | 756-3106/040-002 | 1 |
| M12 socket, right angle, M12 plug, right angle, 0.3 m | 756-3106/040-003 | 1 |
| M12 socket, right angle, M12 plug, right angle, 0.5 m | 756-3106/040-005 | 1 |
| M12 socket, right angle, M12 plug, right angle, 1.0 m | 756-3106/040-010 | 1 |
| M12 socket, right angle, M12 plug, right angle, 2.0 m | 756-3106/040-020 | 1 |
| M12 socket, right angle, M12 plug, right angle, 5.0 m | 756-3106/040-050 | 1 |
| M12 socket, right angle, M12 plug, right angle, 10.0 m | 756-3106/040-100 | 1 |
| M12 socket, right angle, M12 plug, right angle, 20.0 m | 756-3106/040-200 | 1 |



Power supply cable, not fitted with connectors

Item No.


Pack. Unit

| | | |
|---|-------------------|---|
| Power supply cable, not fitted with connectors, 25.0 m | 756-3100/000-250 | 1 |
| Power supply cable, not fitted with connectors, 50.0 m | 756-3100/000-500 | 1 |
| Power supply cable, not fitted with connectors, 100.0 m | 756-3100/000-1000 | 1 |

* Cable length


WAGO-SPEEDWAY 767

PROFIBUS cables, with one end of cable fitted

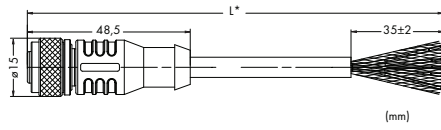


Pin 2 and 4: 0.34 mm²
 1 n.c.
 2 green
 3 n.c.
 4 red
 5 n.c.

| M12 socket, straight, B coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 socket, straight, one free cable end, 2.0 m | 756-1101/060-020 | 1 |
| M12 socket, straight, one free cable end, 5.0 m | 756-1101/060-050 | 1 |
| M12 socket, straight, one free cable end, 10.0 m | 756-1101/060-100 | 1 |
| M12 socket, straight, one free cable end, 20.0 m | 756-1101/060-200 | 1 |

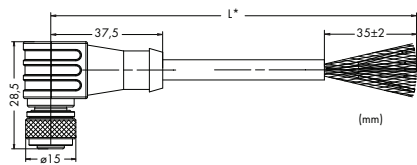


Pin 2 and 4: 0.34 mm²
 1 n.c.
 2 green
 3 n.c.
 4 red
 5 n.c.

| M12 socket, right angle, B coded | Item No. | Pack. Unit |
|---|------------------|------------|
| M12 socket, right angle, one free cable end, 2.0 m | 756-1102/060-020 | 1 |
| M12 socket, right angle, one free cable end, 5.0 m | 756-1102/060-050 | 1 |
| M12 socket, right angle, one free cable end, 10.0 m | 756-1102/060-100 | 1 |
| M12 socket, right angle, one free cable end, 20.0 m | 756-1102/060-200 | 1 |

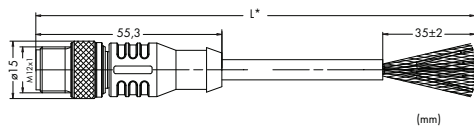

Pin 2 and 4: 0.34 mm²
 1 n.c.
 2 green
 3 n.c.
 4 red
 5 n.c.

| M12 plug, straight, B coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 plug, straight, one free cable end, 2.0 m | 756-1103/060-020 | 1 |
| M12 plug, straight, one free cable end, 5.0 m | 756-1103/060-050 | 1 |
| M12 plug, straight, one free cable end, 10.0 m | 756-1103/060-100 | 1 |
| M12 plug, straight, one free cable end, 20.0 m | 756-1103/060-200 | 1 |

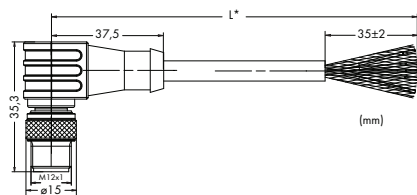


Pin 2 and 4: 0.34 mm²
 1 n.c.
 2 green
 3 n.c.
 4 red
 5 n.c.

| M12 plug, right angle, B coded | Item No. | Pack. Unit |
|---|------------------|------------|
| M12 plug, right angle, one free cable end, 2.0 m | 756-1104/060-020 | 1 |
| M12 plug, right angle, one free cable end, 5.0 m | 756-1104/060-050 | 1 |
| M12 plug, right angle, one free cable end, 10.0 m | 756-1104/060-100 | 1 |
| M12 plug, right angle, one free cable end, 20.0 m | 756-1104/060-200 | 1 |

* Cable length

WAGO-SPEEDWAY 767

PROFIBUS cables, with both ends of cable fitted

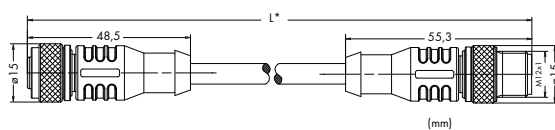


Pin 2 and 4: 0,34 mm²
 1 n.c.
 2 green
 3 n.c.
 4 red
 5 n.c.

M12 socket, straight / M12 plug, straight, B coded

Item No.

Pack. Unit

| | | |
|--|------------------|---|
| M12 socket, straight, M12 plug, straight, 2.0 m | 756-1105/060-020 | 1 |
| M12 socket, straight, M12 plug, straight, 5.0 m | 756-1105/060-050 | 1 |
| M12 socket, straight, M12 plug, straight, 10.0 m | 756-1105/060-100 | 1 |
| M12 socket, straight, M12 plug, straight, 20.0 m | 756-1105/060-200 | 1 |

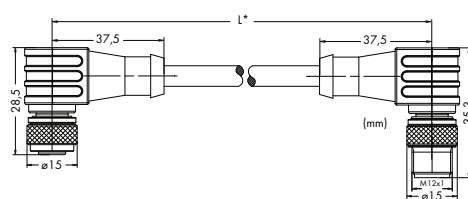

Pin 2 and 4: 0,34 mm²
 1 n.c.
 2 green
 3 n.c.
 4 red
 5 n.c.

M12 socket, right angle / M12 plug, right angle, B coded

Item No.


Pack. Unit

| | | |
|--|------------------|---|
| M12 socket, right angle, M12 plug, right angle, 2.0 m | 756-1106/060-020 | 1 |
| M12 socket, right angle, M12 plug, right angle, 5.0 m | 756-1106/060-050 | 1 |
| M12 socket, right angle, M12 plug, right angle, 10.0 m | 756-1106/060-100 | 1 |
| M12 socket, right angle, M12 plug, right angle, 20.0 m | 756-1106/060-200 | 1 |

* Cable length


WAGO-SPEEDWAY 767

ETHERNET, PROFINET cables, with one or both ends of cable fitted

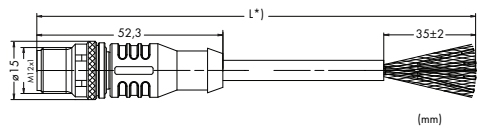



Pin 1 - 4: 0.34 mm²
 1 yellow
 2 white
 3 orange
 4 blue

| M12 plug, straight, D coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 plug, straight, one free cable end, 2.0 m | 756-1201/060-020 | 1 |
| M12 plug, straight, one free cable end, 5.0 m | 756-1201/060-050 | 1 |
| M12 plug, straight, one free cable end, 10.0 m | 756-1201/060-100 | 1 |
| M12 plug, straight, one free cable end, 20.0 m | 756-1201/060-200 | 1 |

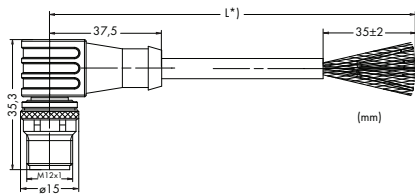



Pin 1 - 4: 0.34 mm²
 1 yellow
 2 white
 3 orange
 4 blue

| M12 plug, right angle, D coded | Item No. | Pack. Unit |
|---|------------------|------------|
| M12 plug, right angle, one free cable end, 2.0 m | 756-1202/060-020 | 1 |
| M12 plug, right angle, one free cable end, 5.0 m | 756-1202/060-050 | 1 |
| M12 plug, right angle, one free cable end, 10.0 m | 756-1202/060-100 | 1 |
| M12 plug, right angle, one free cable end, 20.0 m | 756-1202/060-200 | 1 |

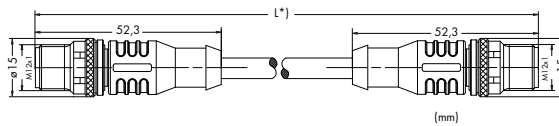

Pin 1 - 4: 0.34 mm²
 1 yellow
 2 white
 3 orange
 4 blue

| M12 plug, straight / M12 plug, straight, D coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 plug, straight, M12 plug, straight, 2.0 m | 756-1203/060-020 | 1 |
| M12 plug, straight, M12 plug, straight, 5.0 m | 756-1203/060-050 | 1 |
| M12 plug, straight, M12 plug, straight, 10.0 m | 756-1203/060-100 | 1 |
| M12 plug, straight, M12 plug, straight, 20.0 m | 756-1203/060-200 | 1 |

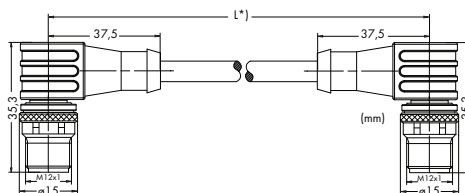


Pin 1 - 4: 0.34 mm²
 1 yellow
 2 white
 3 orange
 4 blue

| M12 plug, right angle / M12 plug, right angle, D coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 plug, right angle, M12 plug, right angle, 2.0 m | 756-1204/060-020 | 1 |
| M12 plug, right angle, M12 plug, right angle, 5.0 m | 756-1204/060-050 | 1 |
| M12 plug, right angle, M12 plug, right angle, 10.0 m | 756-1204/060-100 | 1 |
| M12 plug, right angle, M12 plug, right angle, 20.0 m | 756-1204/060-200 | 1 |

* Cable length


WAGO SPEEDWAY 767

sercos kabel, fitted at one or at both ends

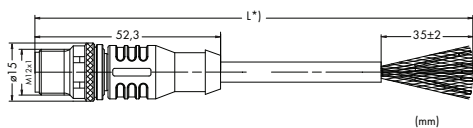


Pin 1 - 4: 0.34 mm²
 1 yellow
 2 white
 3 orange
 4 blue

| M12 plug, straight, D coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 plug, straight, one free cable end, 2.0 m | 756-1601/060-020 | 1 |
| M12 plug, straight, one free cable end, 5.0 m | 756-1601/060-050 | 1 |
| M12 plug, straight, one free cable end, 10.0 m | 756-1601/060-100 | 1 |
| M12 plug, straight, one free cable end, 20.0 m | 756-1601/060-200 | 1 |

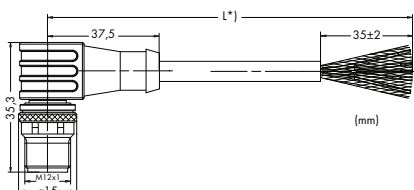


Pin 1 - 4: 0.34 mm²
 1 yellow
 2 white
 3 orange
 4 blue

| M12 plug, right angle, D coded | Item No. | Pack. Unit |
|---|------------------|------------|
| M12 plug, right angle, one free cable end, 2.0 m | 756-1602/060-020 | 1 |
| M12 plug, right angle, one free cable end, 5.0 m | 756-1602/060-050 | 1 |
| M12 plug, right angle, one free cable end, 10.0 m | 756-1602/060-100 | 1 |
| M12 plug, right angle, one free cable end, 20.0 m | 756-1602/060-200 | 1 |

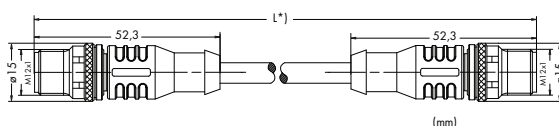

Pin 1 - 4: 0.34 mm²
 1 yellow
 2 white
 3 orange
 4 blue

| M12 plug, straight / M12 plug, straight, D coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 plug, straight, M12 plug, straight, 2.0 m | 756-1603/060-020 | 1 |
| M12 plug, straight, M12 plug, straight, 5.0 m | 756-1603/060-050 | 1 |
| M12 plug, straight, M12 plug, straight, 10.0 m | 756-1603/060-100 | 1 |
| M12 plug, straight, M12 plug, straight, 20.0 m | 756-1603/060-200 | 1 |

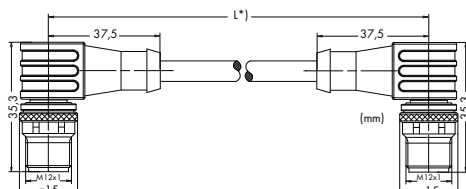


Pin 1 - 4: 0.34 mm²
 1 yellow
 2 white
 3 orange
 4 blue

| M12 plug, right angle / M12 plug, right angle, D coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 plug, right angle, M12 plug, right angle, 2.0 m | 756-1604/060-020 | 1 |
| M12 plug, right angle, M12 plug, right angle, 5.0 m | 756-1604/060-050 | 1 |
| M12 plug, right angle, M12 plug, right angle, 10.0 m | 756-1604/060-100 | 1 |
| M12 plug, right angle, M12 plug, right angle, 20.0 m | 756-1604/060-200 | 1 |

* Cable length


WAGO-SPEEDWAY 767

CANopen, DeviceNet cables, with one end of cable fitted

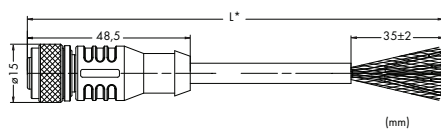


Pin 2 and 3: 0.38 mm²
 Pin 4 and 5: 0.67 mm²
 1 = Shield
 2 = red
 3 = black
 4 = white
 5 = blue

| M12 socket, straight, A coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 socket, straight, one free cable end, 2.0 m | 756-1401/060-020 | 1 |
| M12 socket, straight, one free cable end, 5.0 m | 756-1401/060-050 | 1 |
| M12 socket, straight, one free cable end, 10.0 m | 756-1401/060-100 | 1 |
| M12 socket, straight, one free cable end, 20.0 m | 756-1401/060-200 | 1 |

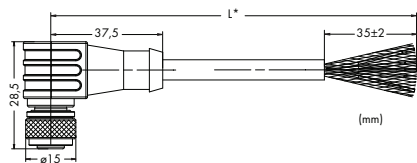


Pin 2 and 3: 0.38 mm²
 Pin 4 and 5: 0.67 mm²
 1 = Shield
 2 = red
 3 = black
 4 = white
 5 = blue

| M12 socket, right angle, A coded | Item No. | Pack. Unit |
|---|------------------|------------|
| M12 socket, right angle, one free cable end, 2.0 m | 756-1402/060-020 | 1 |
| M12 socket, right angle, one free cable end, 5.0 m | 756-1402/060-050 | 1 |
| M12 socket, right angle, one free cable end, 10.0 m | 756-1402/060-100 | 1 |
| M12 socket, right angle, one free cable end, 20.0 m | 756-1402/060-200 | 1 |

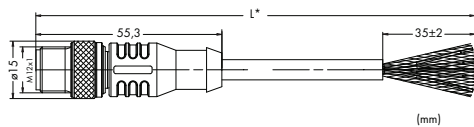

Pin 2 and 3: 0.38 mm²
 Pin 4 and 5: 0.67 mm²
 1 = Shield
 2 = red
 3 = black
 4 = white
 5 = blue

| M12 plug, straight, A coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 plug, straight, one free cable end, 2.0 m | 756-1403/060-020 | 1 |
| M12 plug, straight, one free cable end, 5.0 m | 756-1403/060-050 | 1 |
| M12 plug, straight, one free cable end, 10.0 m | 756-1403/060-100 | 1 |
| M12 plug, straight, one free cable end, 20.0 m | 756-1403/060-200 | 1 |

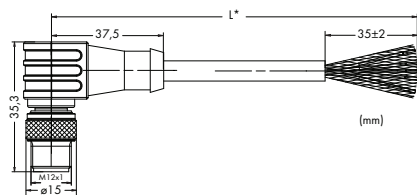


Pin 2 and 3: 0.38 mm²
 Pin 4 and 5: 0.67 mm²
 1 = Shield
 2 = red
 3 = black
 4 = white
 5 = blue

| M12 plug, right angle, A coded | Item No. | Pack. Unit |
|---|------------------|------------|
| M12 plug, right angle, one free cable end, 2.0 m | 756-1404/060-020 | 1 |
| M12 plug, right angle, one free cable end, 5.0 m | 756-1404/060-050 | 1 |
| M12 plug, right angle, one free cable end, 10.0 m | 756-1404/060-100 | 1 |
| M12 plug, right angle, one free cable end, 20.0 m | 756-1404/060-200 | 1 |



WAGO-SPEEDWAY 767

CANopen, DeviceNet cables, with both ends of cable fitted

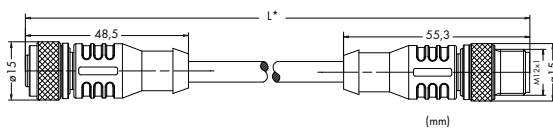

Pin 2 and 3: 0.38 mm²
 Pin 4 and 5: 0.67 mm²
 1 = Shield
 2 = red
 3 = black
 4 = white
 5 = blue

| M12 socket, straight / M12 plug, straight, A coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 socket, straight, M12 plug, straight, 2.0 m | 756-1405/060-020 | 1 |
| M12 socket, straight, M12 plug, straight, 5.0 m | 756-1405/060-050 | 1 |
| M12 socket, straight, M12 plug, straight, 10.0 m | 756-1405/060-100 | 1 |
| M12 socket, straight, M12 plug, straight, 20.0 m | 756-1405/060-200 | 1 |


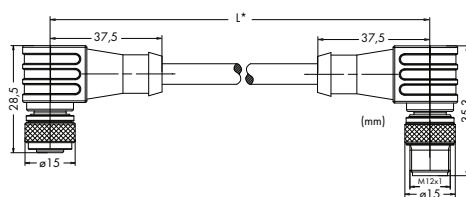


Pin 2 and 3: 0.38 mm²
 Pin 4 and 5: 0.67 mm²
 1 = Shield
 2 = red
 3 = black
 4 = white
 5 = blue

| M12 socket, right angle / M12 plug, right angle, A coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 socket, right angle, M12 plug, right angle, 2.0 m | 756-1406/060-020 | 1 |
| M12 socket, right angle, M12 plug, right angle, 5.0 m | 756-1406/060-050 | 1 |
| M12 socket, right angle, M12 plug, right angle, 10.0 m | 756-1406/060-100 | 1 |
| M12 socket, right angle, M12 plug, right angle, 20.0 m | 756-1406/060-200 | 1 |



WAGO-SPEEDWAY 767

Configurable shielded connectors




Conductor size
 Ø 6 ... 8 mm
 screw clamp connection:
 0.14 ... 0.75 mm²
 spring clamp connection:
 0.14 ... 0.5 mm²

| M12 plug, straight, shielded | | Item No. | Pack. Unit |
|--|---------------------|------------------|------------|
| M12 plug, A coded, straight, spring clamp technology | CANopen / DeviceNet | 756-9207/060-000 | 1 |
| M12 plug, B coded, straight, spring clamp technology | PROFIBUS | 756-9401/060-000 | 1 |
| M12 plug, B coded, straight, screw clamp technology | PROFIBUS / S-BUS | 756-9411/060-000 | 1 |
| M12 plug, D coded, straight, spring clamp technology | ETHERNET / PROFINET | 756-9501/060-000 | 1 |

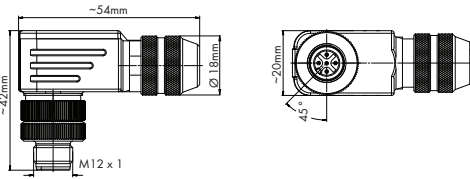


Conductor size
 Ø 6 ... 8 mm
 screw clamp connection:
 0.14 ... 0.75 mm²
 spring clamp connection:
 0.14 ... 0.5 mm²

| M12 plug, right angle, shielded | | Item No. | Pack. Unit |
|---|---------------------|------------------|------------|
| M12 plug, A coded, right angle, spring clamp technology | CANopen / DeviceNet | 756-9211/060-000 | 1 |
| M12 plug, B coded, right angle, spring clamp technology | PROFIBUS | 756-9403/060-000 | 1 |
| M12 plug, B coded, right angle, screw clamp technology | PROFIBUS / S-BUS | 756-9413/060-000 | 1 |
| M12 plug, D coded, right angle, spring clamp technology | ETHERNET / PROFINET | 756-9501/040-000 | 1 |






Conductor size
 Ø 6 ... 8 mm
 screw clamp connection:
 0.14 ... 0.75 mm²
 spring clamp connection:
 0.14 ... 0.5 mm²

| M12 socket, straight, shielded | | Item No. | Pack. Unit |
|--|---------------------|------------------|------------|
| M12 socket, A coded, straight, spring clamp technology | CANopen / DeviceNet | 756-9208/060-000 | 1 |
| M12 socket, B coded, straight, spring clamp technology | PROFIBUS | 756-9402/060-000 | 1 |
| M12 socket, B coded, straight, screw clamp technology | PROFIBUS / S-BUS | 756-9412/060-000 | 1 |

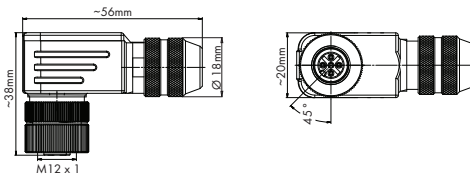

Conductor size
 Ø 6 ... 8 mm
 screw clamp connection:
 0.14 ... 0.75 mm²
 spring clamp connection:
 0.14 ... 0.5 mm²

| M12 socket, right angle, shielded | | Item No. | Pack. Unit |
|---|---------------------|------------------|------------|
| M12 socket, A coded, right angle, spring clamp technology | CANopen / DeviceNet | 756-9210/060-000 | 1 |
| M12 socket, B coded, right angle, spring clamp technology | PROFIBUS | 756-9404/060-000 | 1 |
| M12 socket, B coded, right angle, screw clamp technology | PROFIBUS / S-BUS | 756-9414/060-000 | 1 |




Conductor size
 Ø 6 ... 8 mm / 0.14 ... 0.50 mm²

| M12 Plug, for self assembly | | Item No. | Pack. Unit |
|-----------------------------|---|------------------|------------|
| 8-pole, shielded | M12 socket, straight, screw clamp connection | 756-9211/090-000 | 1 |
| | M12 socket, right angle, screw clamp connection | 756-9214/090-000 | 1 |


WAGO-I/O-SYSTEM 756

Configurable connectors with PG9 thread




Conductor size
 Ø 6 ... 8 mm
 screw clamp connection:
 0.25 ... 0.75 mm²
 spring clamp connection:
 0.14 ... 0.5 mm²

| M12 plug, straight, A coded, unshielded | | | Item No. | Pack. Unit |
|---|--------|---------------------|------------------|------------|
| M12 plug, straight, screw clamp connection PG9 | 4-pole | Supply | 756-9203/040-000 | 5 |
| M12 plug, straight, spring clamp technology PG9 | 5-pole | CANopen / DeviceNet | 756-9203/050-000 | 5 |




Conductor size
 Ø 6 ... 8 mm
 screw clamp connection:
 0.25 ... 0.75 mm²
 spring clamp connection:
 0.14 ... 0.5 mm²

| M12 plug, right angle, A coded, unshielded | | | Item No. | Pack. Unit |
|--|--------|---------------------|------------------|------------|
| M12 plug, right angle, screw clamp connection PG9 | 4-pole | Supply | 756-9206/040-000 | 5 |
| M12 plug, right angle, spring clamp technology PG9 | 5-pole | CANopen / DeviceNet | 756-9206/050-000 | 5 |



Conductor size
 Ø 6 ... 8 mm
 screw clamp connection:
 0.25 ... 0.75 mm²
 spring clamp connection:
 0.14 ... 0.5 mm²

| M12 socket, straight, A coded, unshielded | | | Item No. | Pack. Unit |
|---|--------|---------------------|------------------|------------|
| M12 socket, straight, screw clamp connection PG9 | 4-pole | Supply | 756-9213/040-000 | 5 |
| M12 socket, straight, spring clamp technology PG9 | 5-pole | CANopen / DeviceNet | 756-9213/050-000 | 5 |




Conductor size
 Ø 6 ... 8 mm
 screw clamp connection:
 0.25 ... 0.75 mm²
 spring clamp connection:
 0.14 ... 0.5 mm²

| M12 socket, right angle, A coded, unshielded | | | Item No. | Pack. Unit |
|--|--------|---------------------|------------------|------------|
| M12 socket, right angle, screw clamp connection PG9 | 4-pole | Supply | 756-9216/040-000 | 5 |
| M12 socket, right angle, spring clamp technology PG9 | 5-pole | CANopen / DeviceNet | 756-9216/050-000 | 5 |



WAGO-SPEEDWAY 767

USB communication cable, terminating resistors


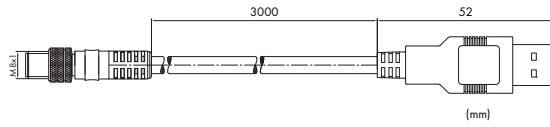


Pin 1 = red
Pin 2 = white
Pin 3 = green
Pin 4 = black

| Description | Item No. | Pack. Unit |
|-------------------------|------------------|------------|
| USB communication cable | 756-4101/042-030 | 1 |





| Description | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 system bus terminating plug, B coded, straight | 756-9409/060-000 | 1 |



R3=390 Ω 0,4 W
R2=220 Ω 0,4 W
R1=390 Ω 0,4 W




| Description | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 PROFIBUS terminating plug, B coded, straight | 756-9405/060-000 | 1 |



R1=120 Ω 0,25 W

| Description | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 CANopen, DeviceNet terminating plug, A coded, straight | 756-9209/060-000 | 1 |

T-piece for bus cable







1 = Drain
2 = +24 V
3 = GND (0 V)
4 = CAN_H
5 = CAN_L




| Description | Item No. | Pack. Unit |
|----------------------------|------------------|------------|
| M12 DeviceNet drop T-piece | 756-9303/050-000 | 5 |

WAGO-SPEEDWAY 767




ETHERNET, PROFINET accessories





| Description | Item No. | Pack. Unit |
|---|------------------|------------|
| Adapter, right angle, M12 socket, D coded/RJ-45 socket (also ideally suited for control cabinet feed-through applications or connecting IP67/IP20 components) | 756-9503/040-000 | 1 |



| Description | Item No. | Pack. Unit |
|---|------------------|------------|
| Adapter, straight, M12 socket, D coded/RJ-45 socket (also ideally suited for control cabinet feed-through applications) or connecting IP67/IP20 components) | 756-9504/040-000 | 1 |



| Description | Item No. | Pack. Unit |
|--------------------------------|----------|------------|
| ETHERNET RJ-45 connector, IP20 | 750-975 | 1 |
| PROFINET RJ-45 connector, IP20 | 750-976 | 1 |




Conductor size
Ø 6 ... 8 mm / 0.14 - 0.5 mm²


| Preassembled M12 plug, axial, A coded, unshielded | Item No. | Pack. Unit |
|--|------------------|------------|
| Compensation connector, 5 poles for 767-6403 Thermocoupler Module (Pt1000 sensor integrated) | 756-9207/050-000 | 1 |
| M12 plug, straight, spring clamp technology | | |

WAGO SPEEDWAY 767

M12 panel feed-through connectors

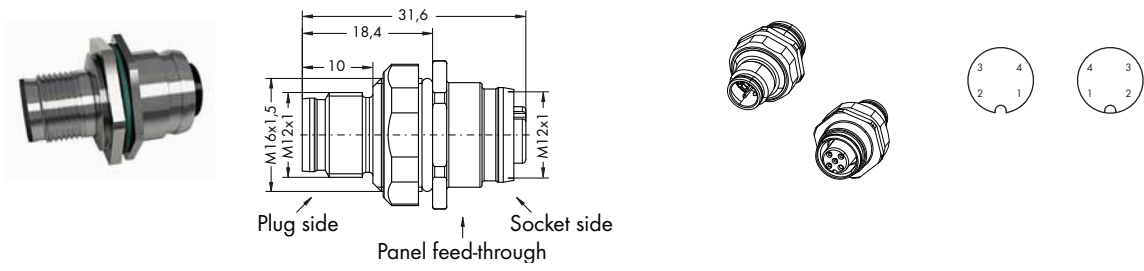

| M12 socket / M12 plug, A coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 panel feed-through connectors, A coded | 756-9217/050-000 | 1 |

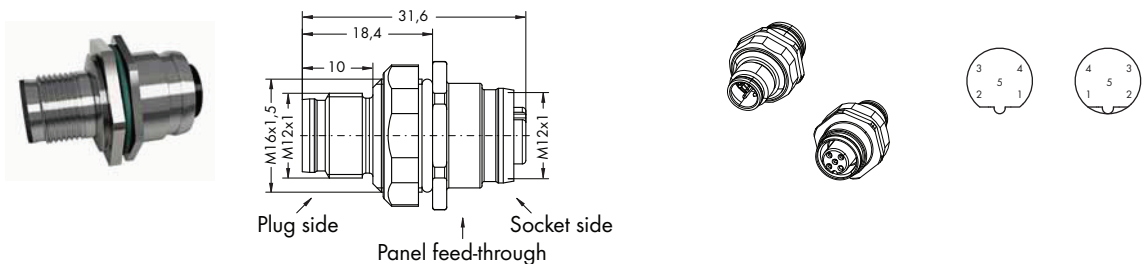

| M12 socket / M12 plug, B coded | Item No. | Pack. Unit |
|--|------------------|------------|
| M12 panel feed-through connectors, B coded | 756-9406/050-000 | 1 |



| M23 plug, can be pre-assembled | Item No. | Pack. Unit |
|---|------------------|------------|
| 6 poles M23 plug, straight, soldering technology | 756-9601/060-000 | 1 |
| 6 poles M23 plug, right angle, soldering technology | 756-9602/060-000 | 1 |



| M23 socket, can be pre-assembled | Item No. | Pack. Unit |
|---|------------------|------------|
| 6 poles M23 socket, straight, soldering technology | 756-9603/060-000 | 1 |
| 6 poles M23 socket, right angle, soldering technology | 756-9604/060-000 | 1 |



| Description | Item No. | Pack. Unit |
|--|----------|------------|
| M23 assembly key for easy installation | 756-8201 | 1 |

Torque Wrench M8 and M12
Assembly kit



Assembly kit for 756 Series pre-assembled IP67 cables and connectors, consists of:



- Tool kit
- Torque screwdriver with adjustable torque (window scale)
- Adjustment tool for changing the torque
- One Allen key (interchangeable 4 mm blade) for each of the M8 and M12 connectors

A torque specification of 0.6 Nm for M8 connectors and 1.0 Nm for M12 connectors is required for 756 Series cables and connectors.

| Description | Item No. | Pack. Unit |
|--------------------------|----------|------------|
| Torque Wrench M8 and M12 | 206-701 | 1 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |


| Technical Data | |
|--------------------------|---|
| Torque range | 0.4 ... 1 Nm \pm 6 % (adjustable) |
| Material | Handle: Polypropylene (PP) for hard zone, thermoplastic elastomers (TPE) for soft zone Allen key: Polyamide (PA), fiber-glass-reinforced; chromium-vanadium-molybdenum steel (CrMoV) (1.2381) Adjustment tools: Cellulose acetate; chromium-vanadium- molybdenum steel (CrMoV) (1.2381) |
| Color | black |
| Standards/specifications | EN ISO 6789; BS EN 26789; ASME B107.14.M |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

Application examples: I/O module

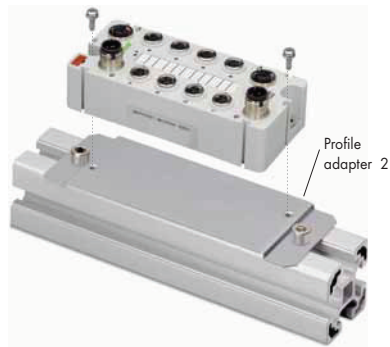


| Carrier rail and profile adapters | Item No. | Pack. Unit |
|---|----------|------------|
| Carrier rail adapter 1 for couplers/progr. couplers | 767-121 | 1 |
| Carrier rail adapter 2 for I/O and power distribution modules | 767-122 | 1 |
| Profile adapter 1 for couplers/progr. couplers | 767-123 | 1 |
| Profile adapter 2 for I/O and power distribution modules | 767-124 | 1 |
| Carrier rail adapter for I/O module 8 x M12 | 767-125 | 1 |
| Profile adapter for I/O module 8 x M12 | 767-126 | 1 |

M8



M12



M12



M23



| Protective caps (for covering unused sensor/actuator connectors) | Item No. | Pack. Unit | |
|--|--------------------|------------|---|
| M8 protective cap | for unused sockets | 756-8101 | 1 |
| M12 protective cap | for unused sockets | 756-8102 | 1 |
| M12 protective cap (fieldbus) | for unused plugs | 756-8103 | 1 |
| M23 protective cap (fieldbus/supply) | for unused plugs | 756-8104 | 1 |